M+ Lighting



2025 CATALOGUE


ARCHITECTURE LIGHTING


- +852 9011 3453
- Room A02, 9/F, Hop Hing Industrial Building, 704 Castle Peak Road, Lai Chi Kok
- o mx_shining.hk

MAGNETIC SYSTEM


M203 SERIES


CATALOGUE

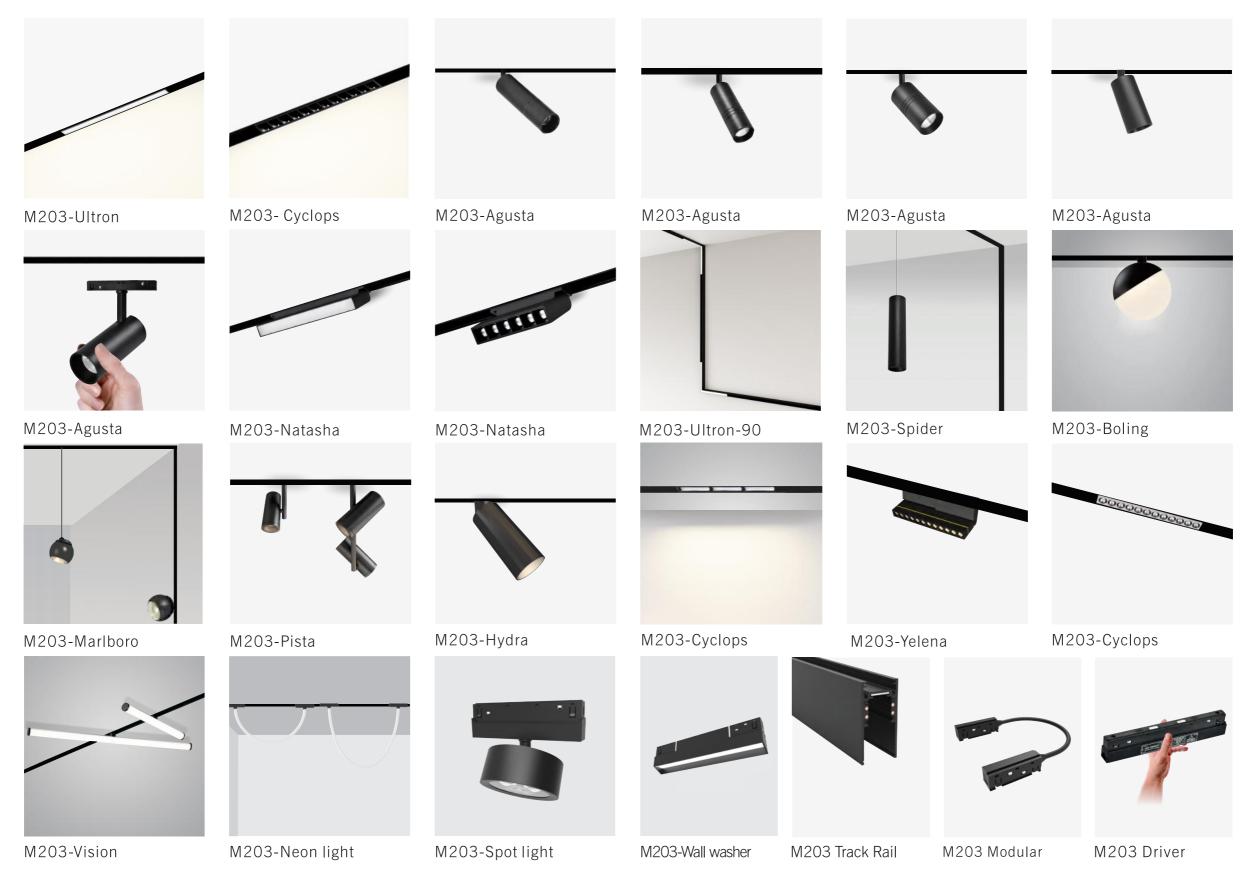


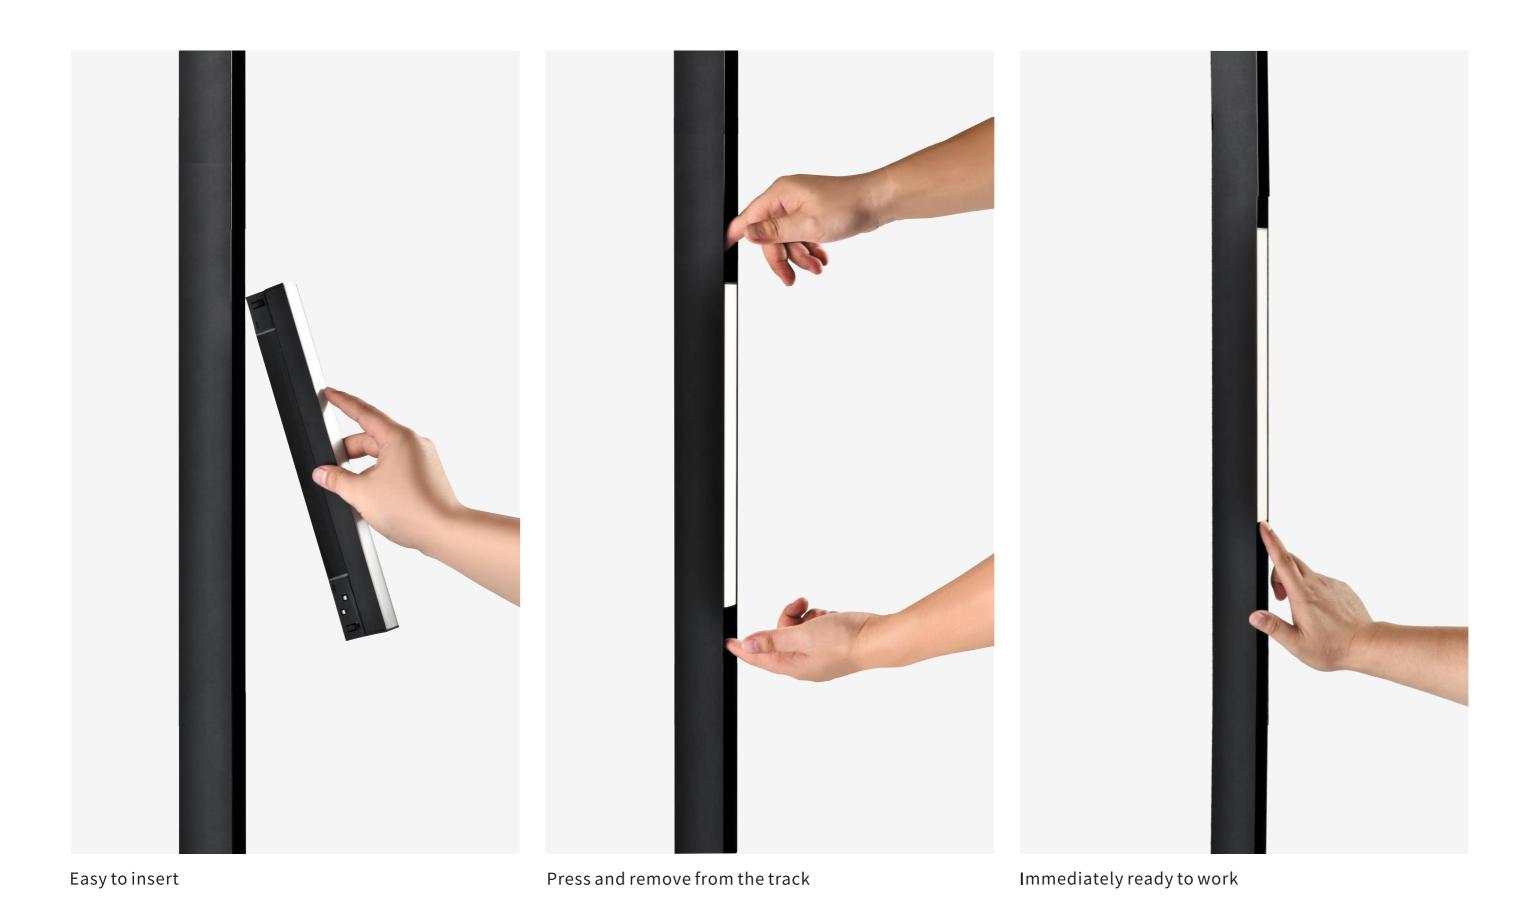

Mx Shining Limited

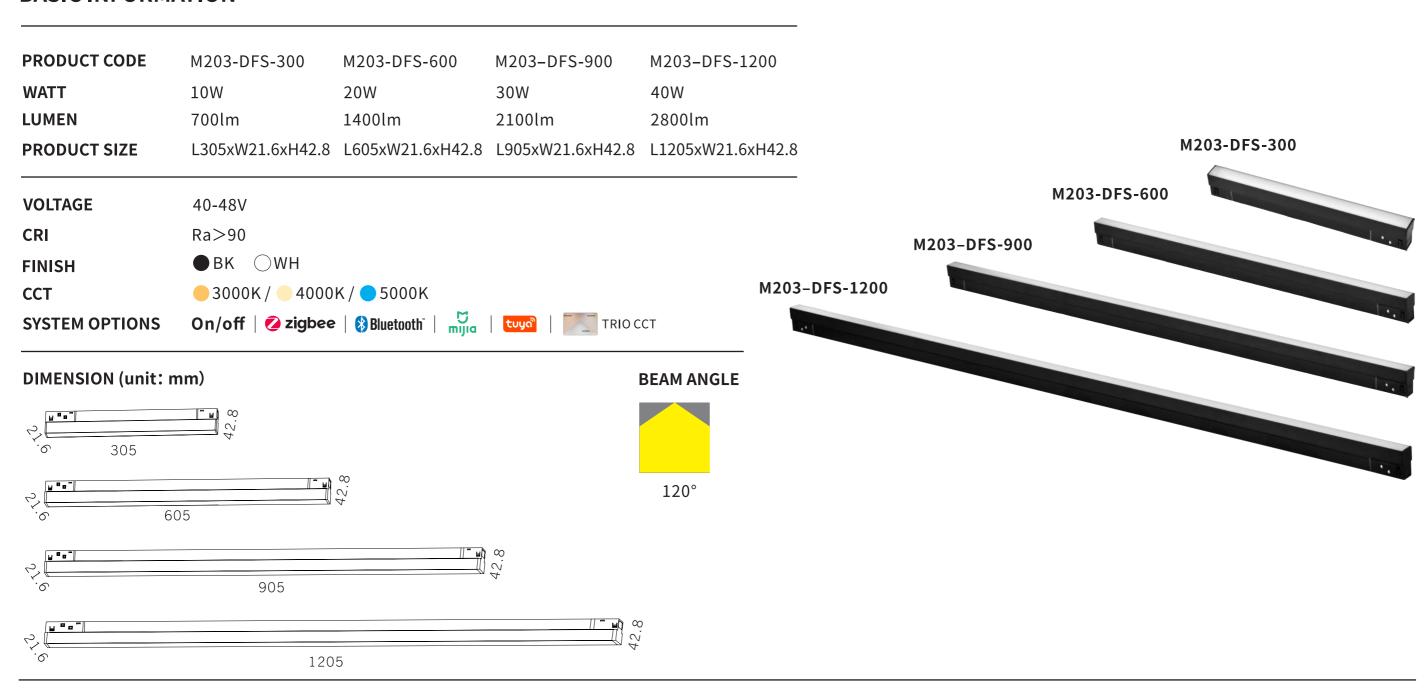

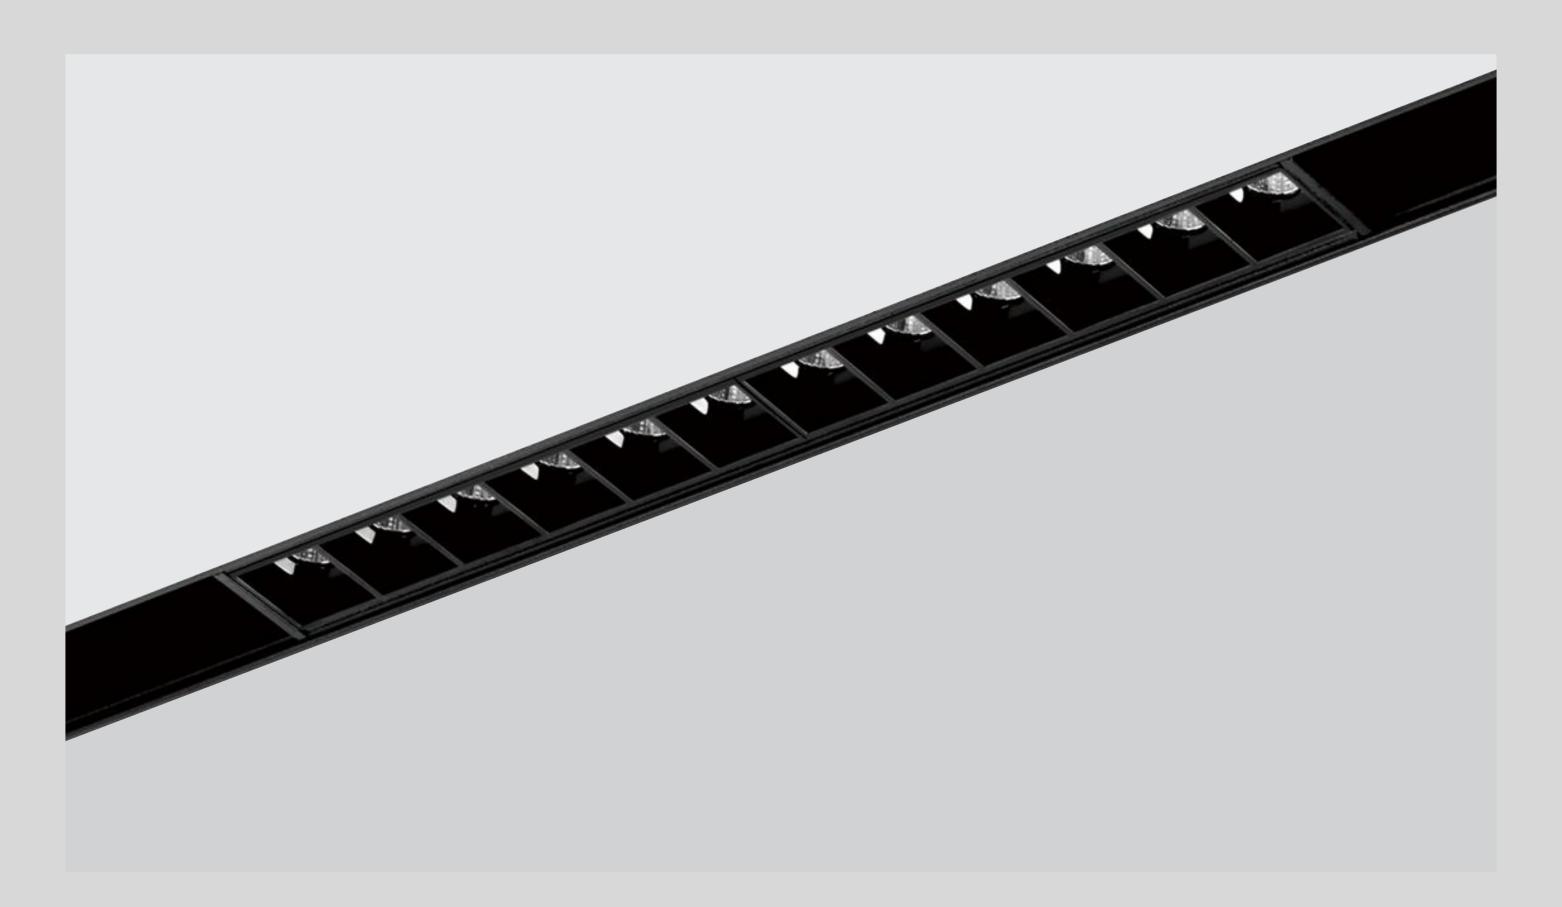

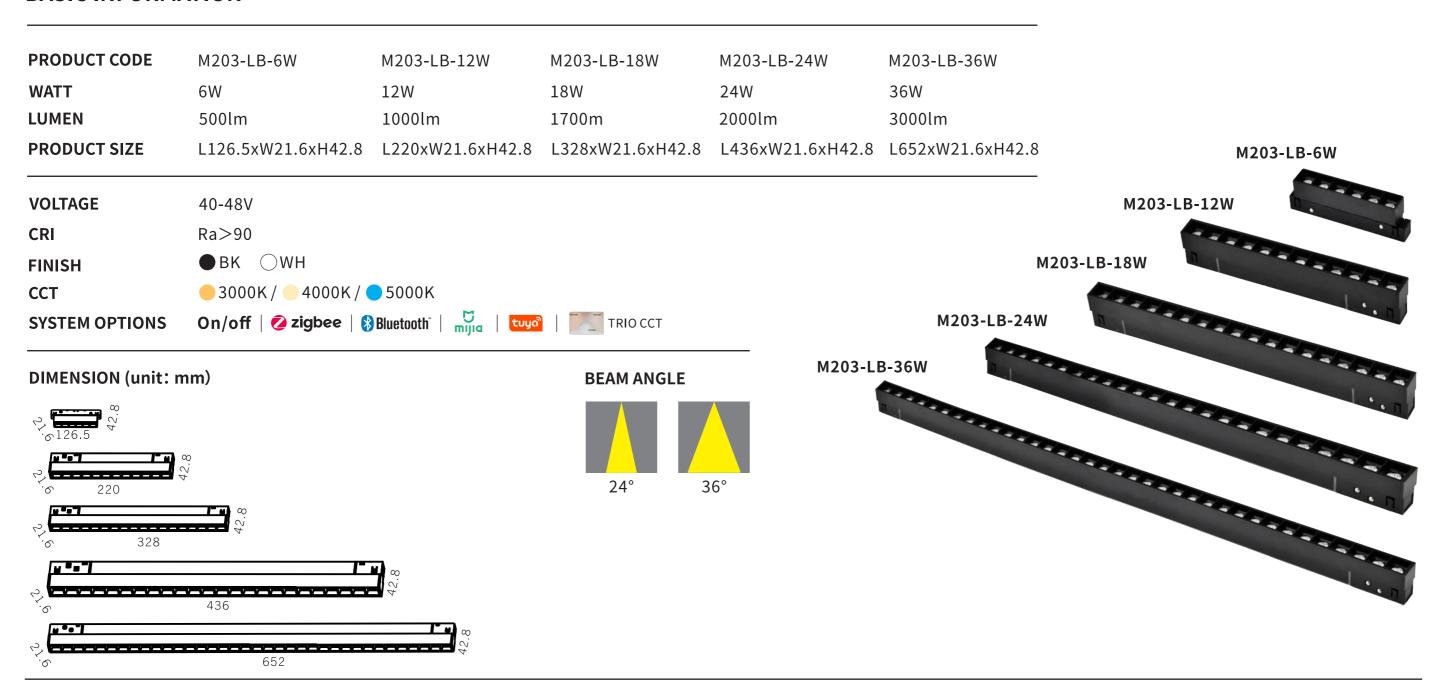



PRODUCT CODE M203-TL2-B-3W M203-TL2-B-5W

WATT 3W 5W **LUMEN** 170lm 200lm

PRODUCT SIZE L135xØ29.5xH110 L135xØ30xW187


VOLTAGE 40-48V **CRI** Ra>90


FINISH BK WH BR

CCT 3000K / 4000K / 5000K

SYSTEM OPTIONS On/off | Zigbee | Bluetooth | TRIO CCT

DIMENSION (unit: mm)

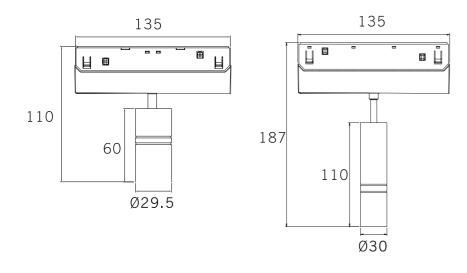





PRODUCT CODE M203-TL2-7W M203-TL2-12W WATT 7W 12W **LUMEN** 700lm 960lm **PRODUCT SIZE** 135xØ45x169 135xØ45x208 **VOLTAGE** 40-48V Ra>90 CRI ●BK ○WH ●BR **FINISH** ● 3000K / ● 4000K / ● 5000K CCT On/off | Zigbee | Bluetooth | toys | TRIOCCT SYSTEM OPTIONS

DIMENSION (unit: mm) BEAM ANGLE 135 15° 24° 36°

Ø45



Notes:

Ø45

130

^{*}For other options special request, please contact us.

^{*}For the most updated product information, please go to our webesite.

PRODUCT CODE M203-TL2-16W M203-TL2-20W

WATT 16W 20W **LUMEN** 1400lm 1800lm

PRODUCT SIZE L135xØ60xH187 L135xØ60xH225


VOLTAGE 40-48V **CRI** Ra>90

FINISH BK WH BR

CCT 3000K / 4000K / 5000K

SYSTEM OPTIONS On/off | 2 zigbee | | Bluetooth | | | tuya | | TRIO CCT

DIMENSION (unit: mm)

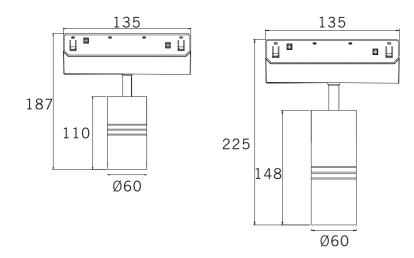







M203-TL2-16W

M203-TL2-20W




M203-SL-15W PRODUCT CODE M203-SL-5W M203-SL-7W M203-SL-12W 5W 7W 15W WATT 12W **LUMEN** 414lm 568lm 961lm 1266lm L135xØ31xH113 L135xØ31xH162.5 L135xØ44.5xH149 L135xØ44.5xH189 **PRODUCT SIZE**

VOLTAGE 40-48V **CRI** Ra>90

FINISH BK WH BR

CCT 3000K / 4000K / 5000K

SYSTEM OPTIONS On/off | Zigbee | Bluetooth | TRIO CCT

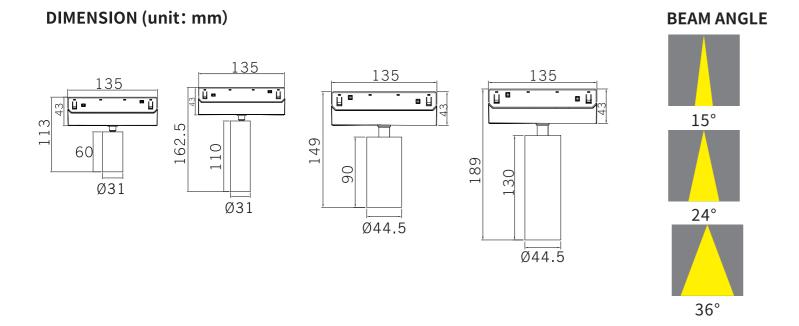





PRODUCT CODE	M203-TL-12W	M203-TL-20W	M203-TL-30W

WATT 12W 20W 30W LUMEN 960lm 1600lm 2400lm

PRODUCT SIZE L126.5xØ49xH188 L126.5xØ61xH200.6 L126.5xØ75xH200.6

VOLTAGE 40-48V


CRI Ra>90


FINISH BK WH BR

CCT 3000K / 4000K / 5000K

SYSTEM OPTIONS On/off | Zigbee | Bluetooth | tuga | tuga | TRIO CCT

DIMENSION (unit: mm)

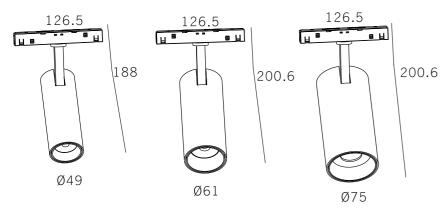





PRODUCT CODE M203-DFSF-6W M203-DFSF-12W

WATT 6W 12W **LUMEN** 270lm 560lm

PRODUCT SIZE 127x22x106 220.5x22x106

VOLTAGE 40-48V

CRI Ra>90

FINISH • BK • WH

CCT 3000K / 4000K / 5000K

SYSTEM OPTIONS On/off | Zigbee | Bluetooth | TRIO CCT



220.5



106





M203-DFSF-6W

M203-DFSF-12W



Notes:

127

106

22

^{*}For other options special request, please contact us.

^{*}For the most updated product information, please go to our webesite.

PRODUCT CODE M203-LBF-6W M203-LBF-12W

WATT 6W 12W **LUMEN** 580lm 1100lm

PRODUCT SIZE L127xW22xH106 L220.5xW22xH106

VOLTAGE 40-48V


CRI Ra>90

FINISH BK WH

CCT 3000K / 4000K / 5000K

SYSTEM OPTIONS On/off | Zigbee | Bluetooth | Luya | TRIO CCT

DIMENSION (unit: mm)

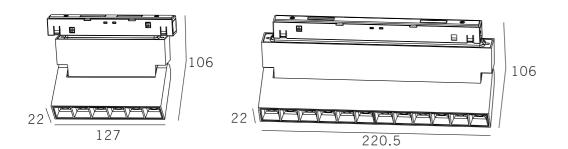

BEAM ANGLE










M203-LBF-6W

M203-LBF-12W



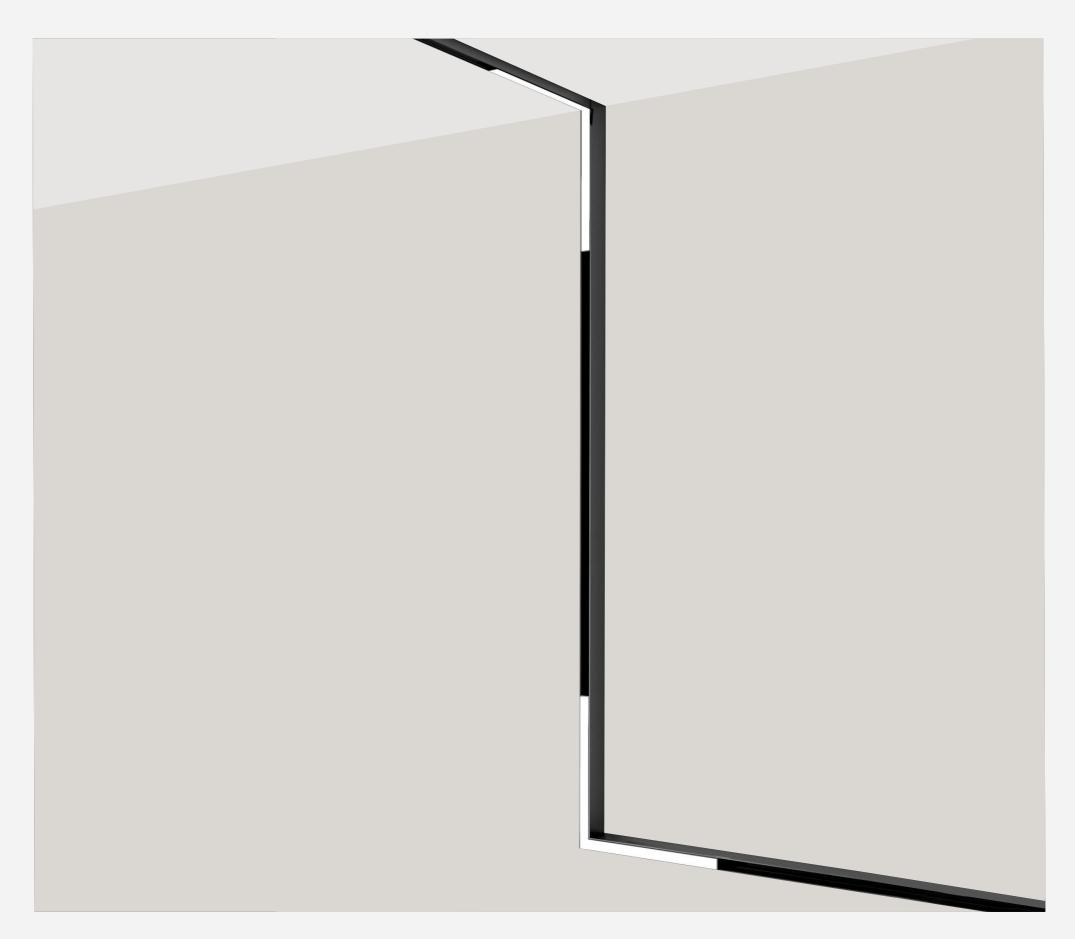

Mx Shining Limited

 PRODUCT CODE
 M203-DFS-90D
 M203-DFS-90IN

 WATT
 20W
 20W

 LUMEN
 1400lm
 1400lm

 PRODUCT SIZE
 L307xW322xH42.8
 L330xW330xH42.8


 VOLTAGE
 40-48V

 CRI
 Ra>90

FINISH BK WH


CCT 3000K / 4000K / 5000K


SYSTEM OPTIONS On/off | Zigbee | Bluetooth | TRIO CCT

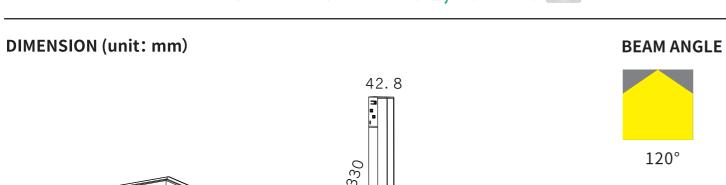

.º. fi

330

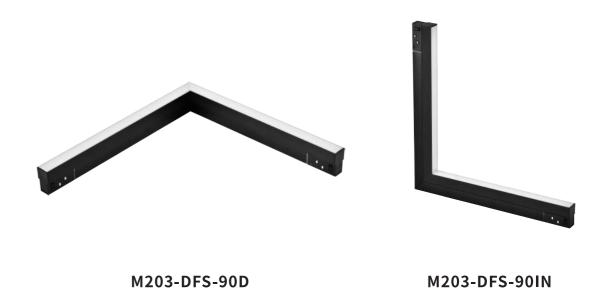

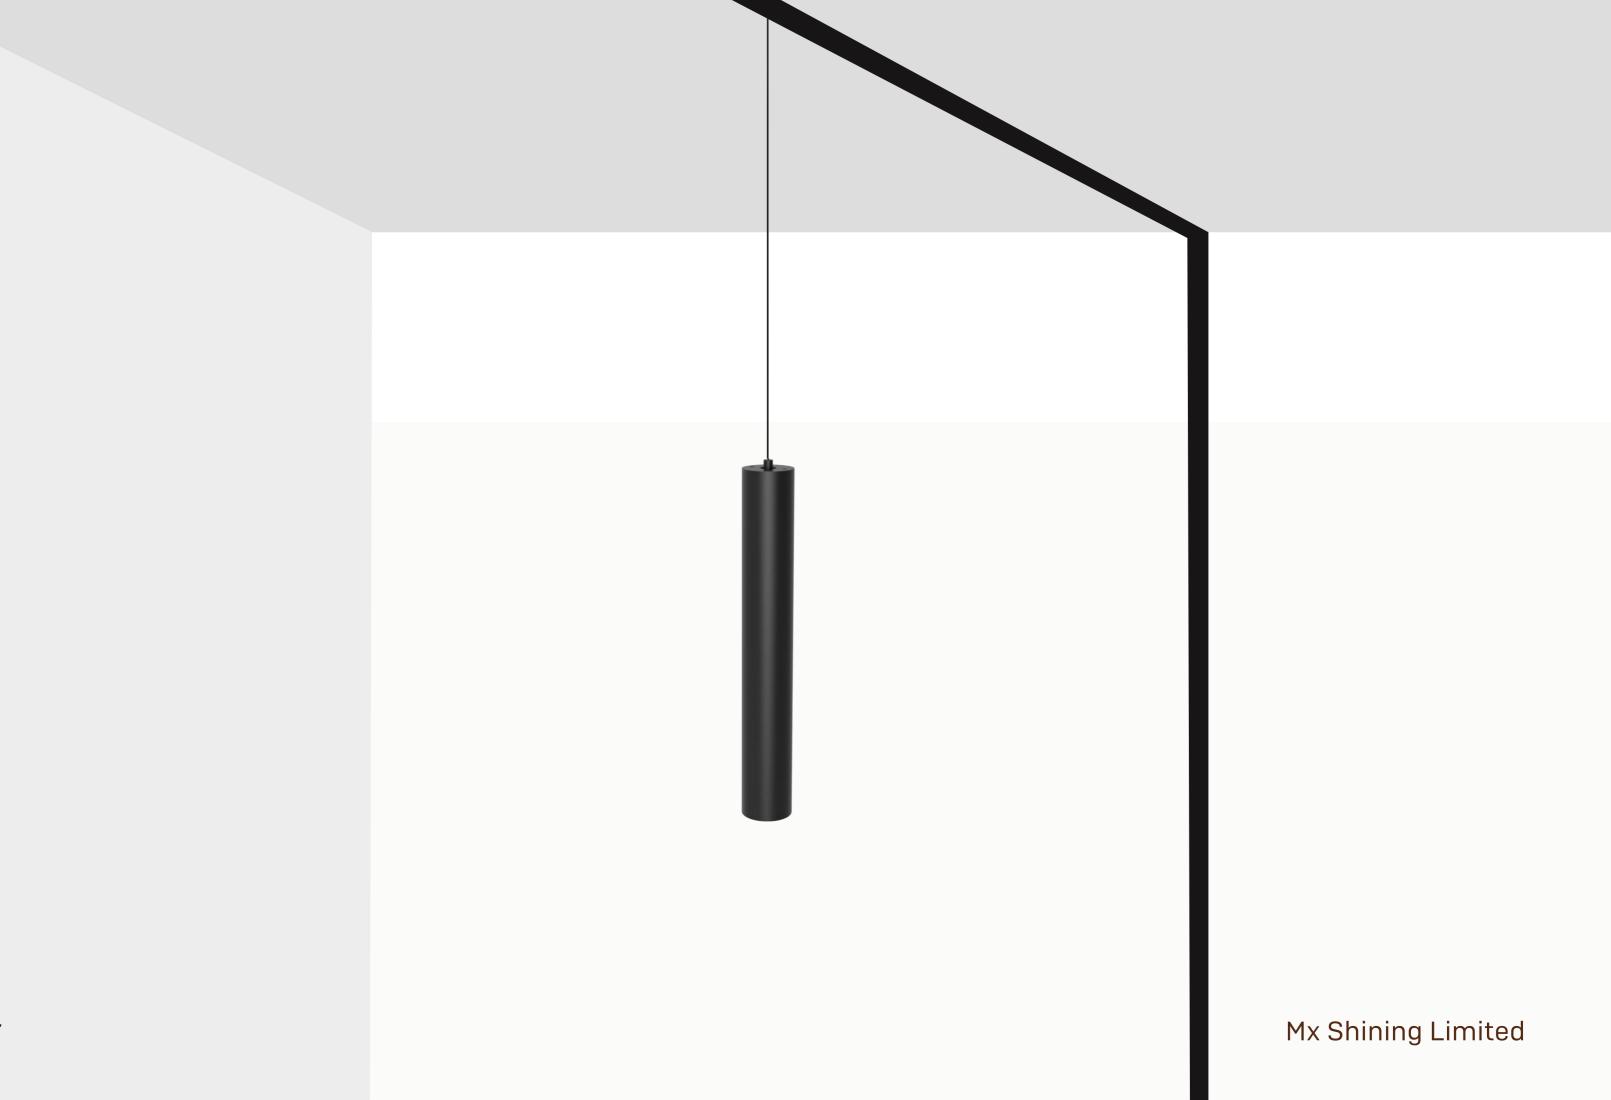

PRODUCT CODE M203-FM-7W M203-FM-15W

WATT 7W 15W **LUMEN** 598lm 1365lm

PRODUCT SIZE L135xØ32xH1000 L135xØ45xH1000

VOLTAGE 40-48V


CRI Ra>90

FINISH • BK • WH

CCT 3000K / 4000K / 5000K


SYSTEM OPTIONS On/off | Zigbee | Bluetooth | TRIO CCT

DIMENSION (unit: mm)







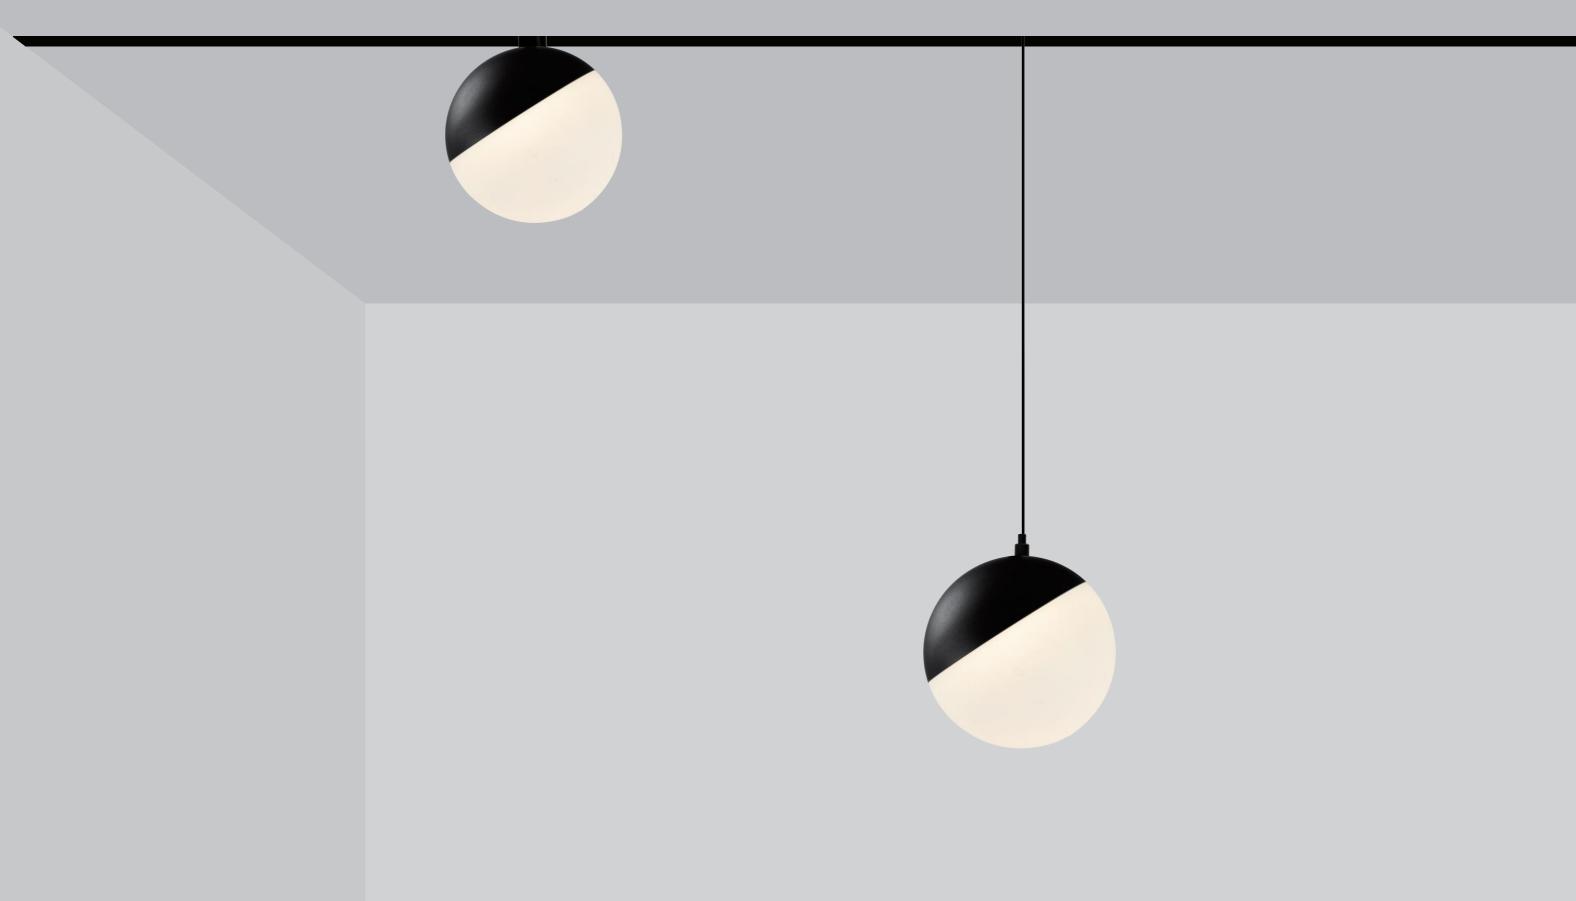

PRODUCT CODE M203-BL M203-BL2

 WATT
 10W
 10W

 LUMEN
 1000lm
 1000lm

PRODUCT SIZE L135xØ100xH143 L135xØ100xH1000

VOLTAGE 40-48V


CRI Ra>90

FINISH BK WH GD

CCT 3000K / 4000K / 5000K

SYSTEM OPTIONS On/off | Zigbee | Bluetooth | TRIO CCT


DIMENSION (unit: mm)









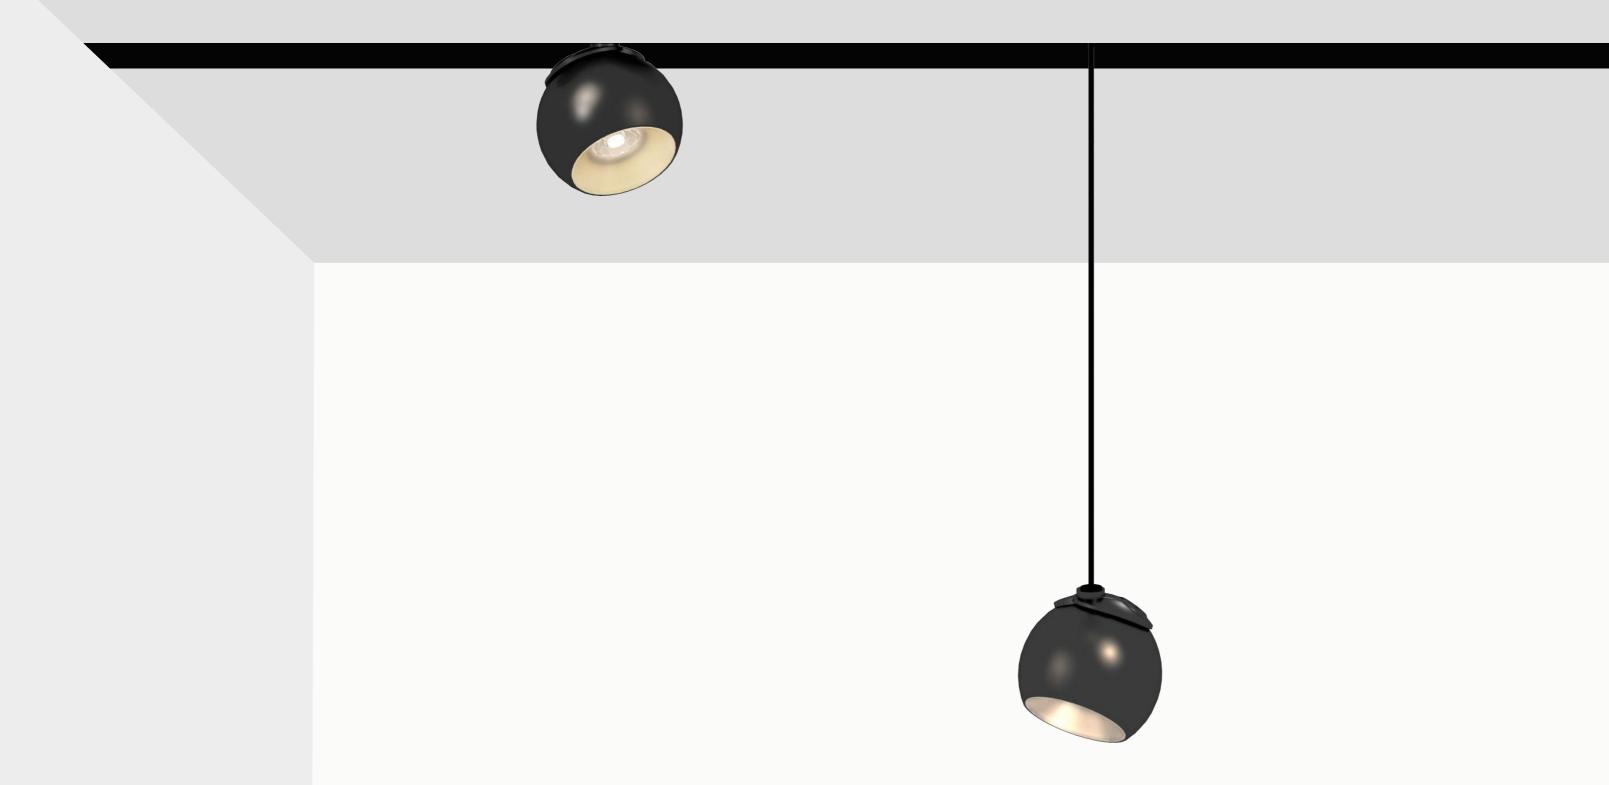

M203-MBO-B PRODUCT CODE M203-MBO-A

12W 12W WATT 1100lm LUMEN 1100lm

L135xØ100xH133.6 L135xØ100xH1000 **PRODUCT SIZE**

VOLTAGE 40-48V


CRI Ra>90


●BK ○WH ○GD **FINISH**

● 3000K / ● 4000K / ● 5000K CCT

On/off | Zigbee | Bluetooth | tuyo | TRIO CCT SYSTEM OPTIONS


DIMENSION (unit: mm)









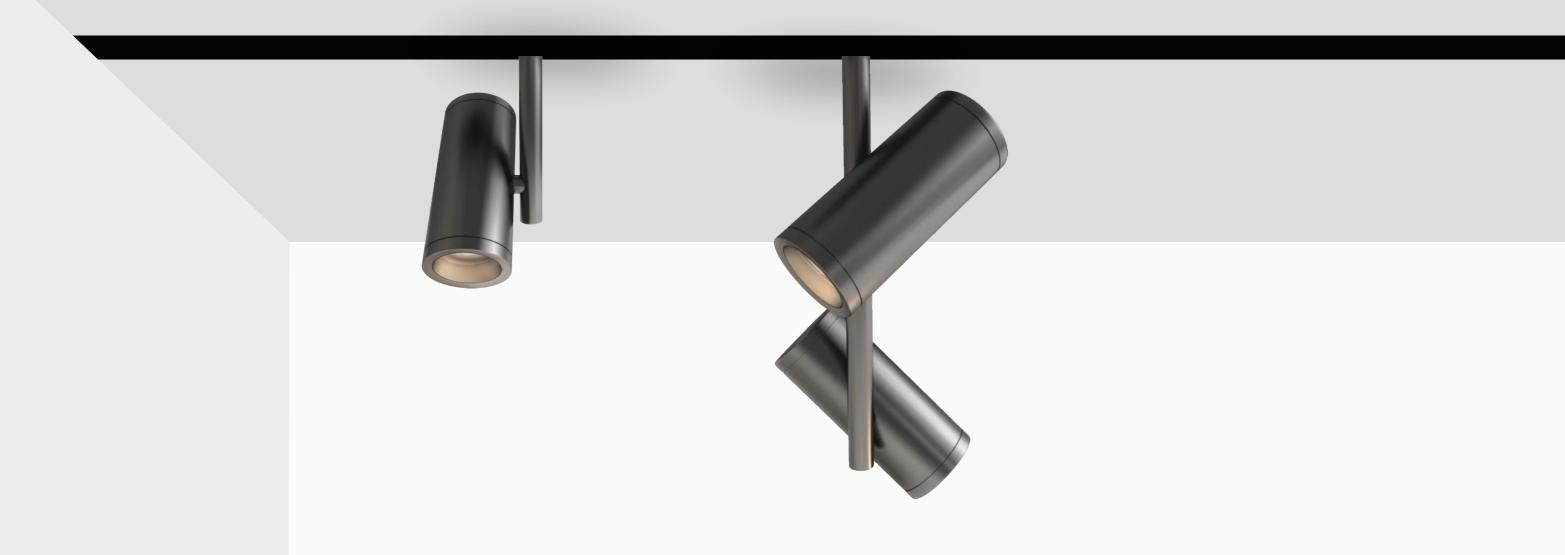

PRODUCT CODE M203-PST-8W M203-PST-16W-LR

WATT 8W 8Wx2 **LUMEN** 640lm 1440lm

PRODUCT SIZE L135xØ42xH150 L135xØ42xH259

VOLTAGE 40-48V


CRI Ra>90

FINISH BK WH BR


CCT 3000K / 4000K / 5000K

SYSTEM OPTIONS On/off | 2 zigbee | | Bluetooth | | tuya | TRIO CCT

DIMENSION (unit: mm)

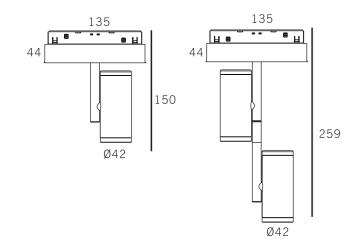

BEAM ANGLE




36°



M203-PST-10W



M203-PST-16W-LR

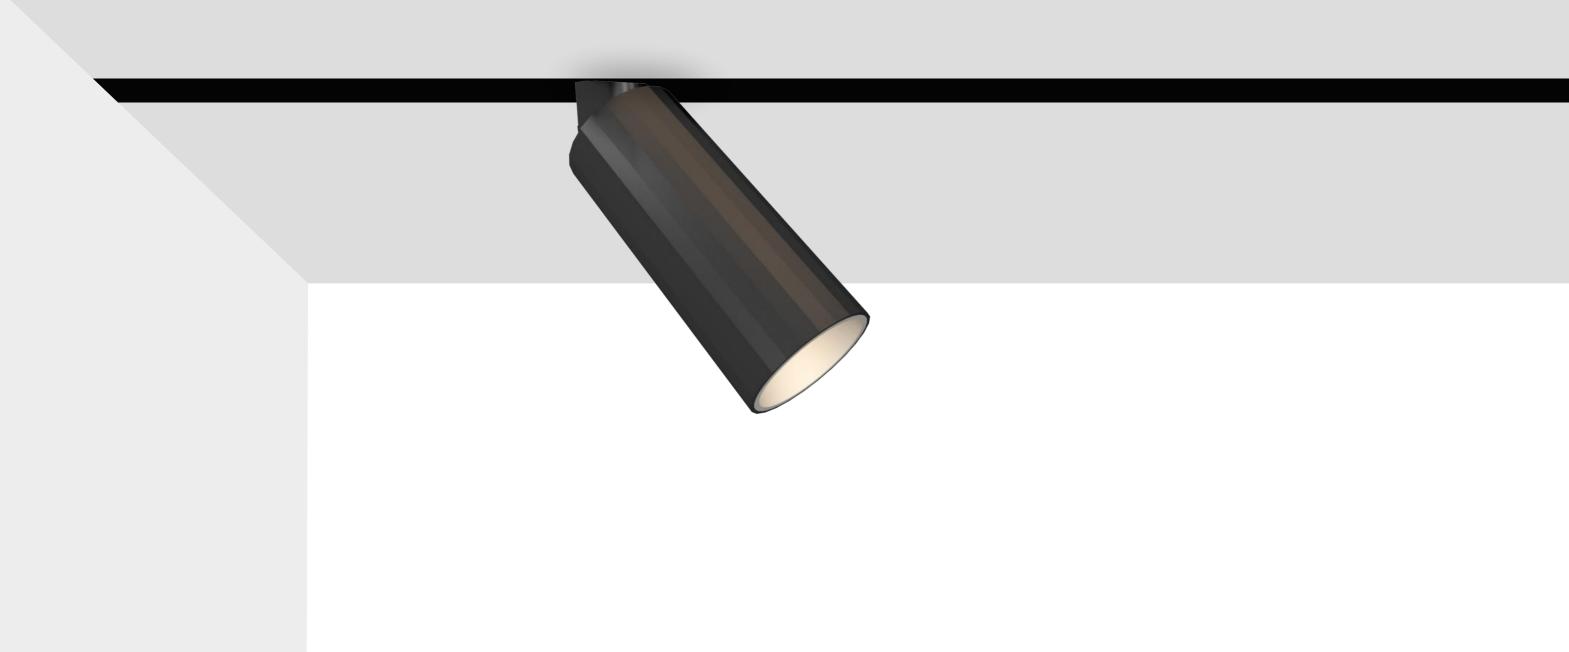

PRODUCT CODE M203-HD-12W

WATT 12W 700lm

PRODUCT SIZE L135xØ50xH171


VOLTAGE 40-48V **CRI** Ra>90


FINISH BK WH BR

CCT 3000K / 4000K / 5000K

SYSTEM OPTIONS On/off | Zigbee | Bluetooth | TRIO CCT

DIMENSION (unit: mm)







M203-HD-12W

PRODUCT CODE M203-LBP-6W M203-LBP-12W M203-LBP-18W

 WATT
 6W
 12W
 18W

 LUMEN
 300lm
 610lm
 1200lm

PRODUCT SIZE L126.4xW22xH46 L220xW21.6xH45 L328xW21.6xH45

VOLTAGE 40-48V


CRI Ra>90

FINISH • BK • WH


CCT 3000K / 4000K / 5000K

SYSTEM OPTIONS On/off | Zigbee | Bluetooth | TRIO CCT


DIMENSION (unit: mm)









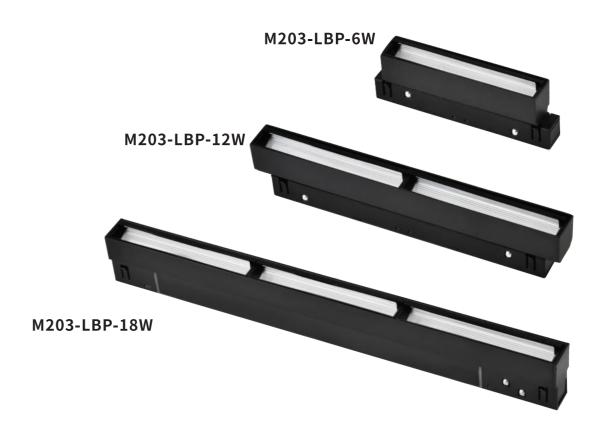

PRODUCT CODE M203-LBF4-12W

WATT 12W 960lm

PRODUCT SIZE L220xW16.3xH115

VOLTAGE 40-48V

CRI Ra>90


FINISH • BK • WH

CCT 3000K / 4000K / 5000K

SYSTEM OPTIONS On/off | Zigbee | Bluetooth | TRIO CCT

DIMENSION (unit: mm)

BEAM ANGLE

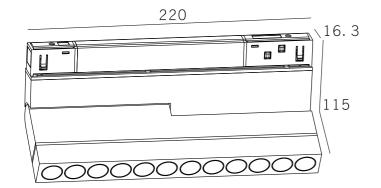







M203-LBF4-12W

PRODUCT CODE M203-LB2-12W

WATT 12W 960lm

PRODUCT SIZE 220x22x43

VOLTAGE 40-48V

CRI Ra>90

FINISH • BK • WH

CCT 3000K / 4000K / 5000K

SYSTEM OPTIONS On/off | Zigbee | Bluetooth | TRIO CCT


DIMENSION (unit: mm)

BEAM ANGLE





M203-LB2-12W

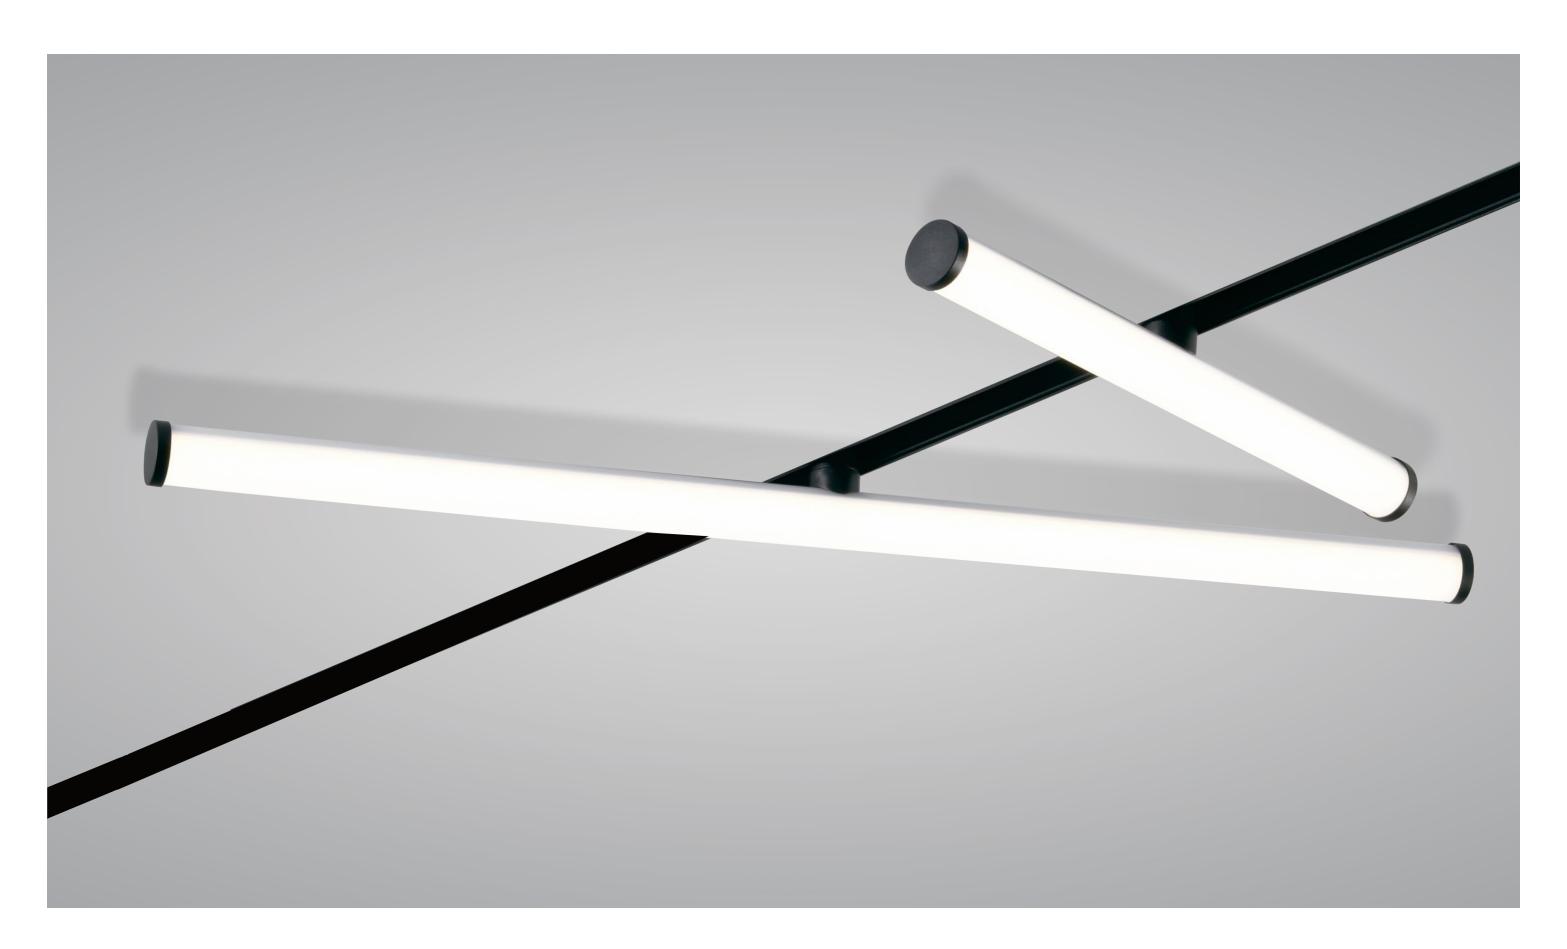

 PRODUCT CODE
 M203-TB-300
 M203-TB-600

 WATT
 6W
 12W

 LUMEN
 600lm
 1200lm

 PRODUCT SIZE
 L302xØ27.7xH102
 L602xØ27.7xH102


VOLTAGE 40-48V **CRI** Ra>90

SYSTEM OPTIONS On/off | Zigbee | Bluetooth | TRIO CCT

DIMENSION (unit: mm) 126.5

() **ø**27.7

120°

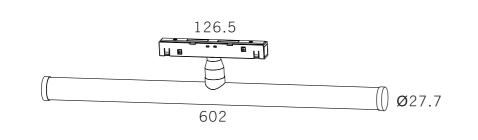

302





M203-TB-300

BASIC INFORMATION

PRODUCT CODE M203-NEON-1000 M203-NEON-2000

WATT 18W 36W LUMEN 1891lm 3713lm

PRODUCT SIZE L135xØ22xH1000 L135xØ22xH2000

VOLTAGE 40-48V


CRI Ra>90

FINISH • BK • WH


CCT 3000K / 4000K / 5000K

SYSTEM OPTIONS On/off | Zigbee | Bluetooth | tuyo | TRIO CCT



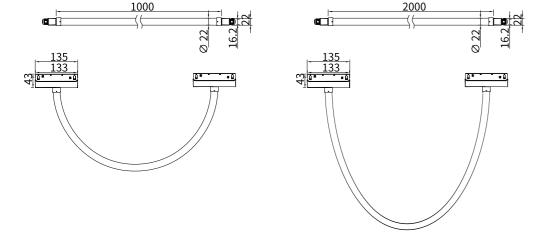



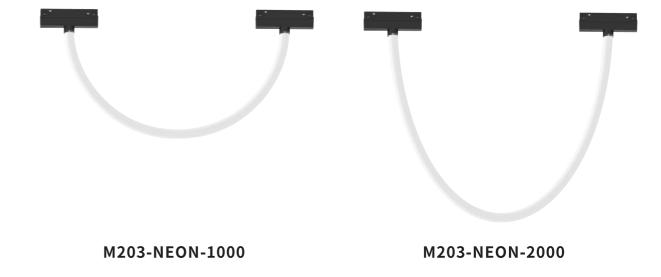



BASIC INFORMATION

PRODUCT CODE M203-D70M-8W M203-D90M-12W

 WATT
 8W
 12W

 LUMEN
 694lm
 917lm

PRODUCT SIZE L135xØ70xH93 L135xØ90xH96

VOLTAGE 40-48V


CRI Ra>90


FINISH • BK • WH

CCT 3000K / 4000K / 5000K

SYSTEM OPTIONS On/off | 2 zigbee | | Bluetooth | | tuga | | TRIO CCT

DIMENSION (unit: mm)











M203-D70M-8W


M203-D90M-12W

M203 | Wall washer Series


BASIC INFORMATION

PRODUCT CODE	M203-LBP2-6W	M203-LBP2-12W	M203-LBP2-18W				
WATT	6W	12W	18W				
LUMEN	/	/	/				
PRODUCT SIZE	L104.5xW22xH52.8	L204xW22xH52.8	L304xW22xH52.8				
VOLTAGE	40-48V						
CRI	Ra>90						
FINISH	●BK ○WH						
ССТ	● 3000K / ● 4000K / ● 50	■3000K/ ■4000K/ ●5000K					
SYSTEM OPTIONS	On/off Zigbee Bluetooth TRIO CCT						




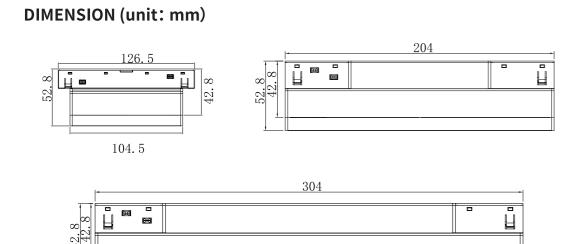



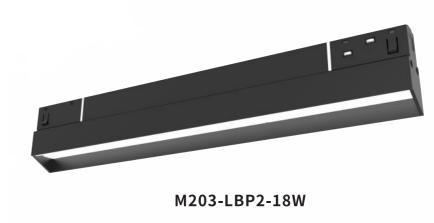


M203-TRACK RAIL | Track series

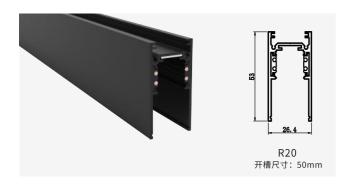


\$20 Size:26.4X78.4X26.4mm




S20-1 Size:26.4X78.4X26.4mm

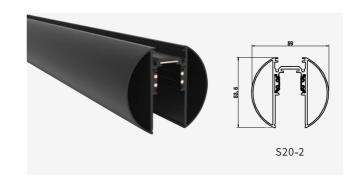


\$20-2 Size:59X53.6X59mm




R20-1 Size:53.5X47.3X57mm




R20-2 Size:72X54.9X26.3mm

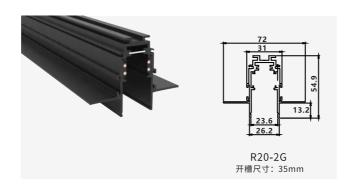


R20-2G Size:31X53X72mm



R20-4 Size:32X56.3X42mm

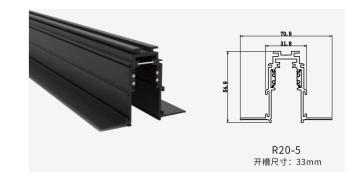


R20-5 Size:70.9X54.9X31.8mm

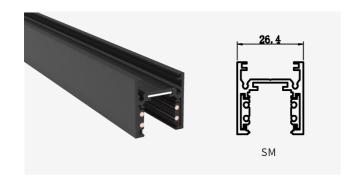

SM Size:26.4X26.4X26.4mm




RM Size:40.6X36.6X48.8mm




RM-4 Size:31.3X32X42mm

CONNETION MODULE

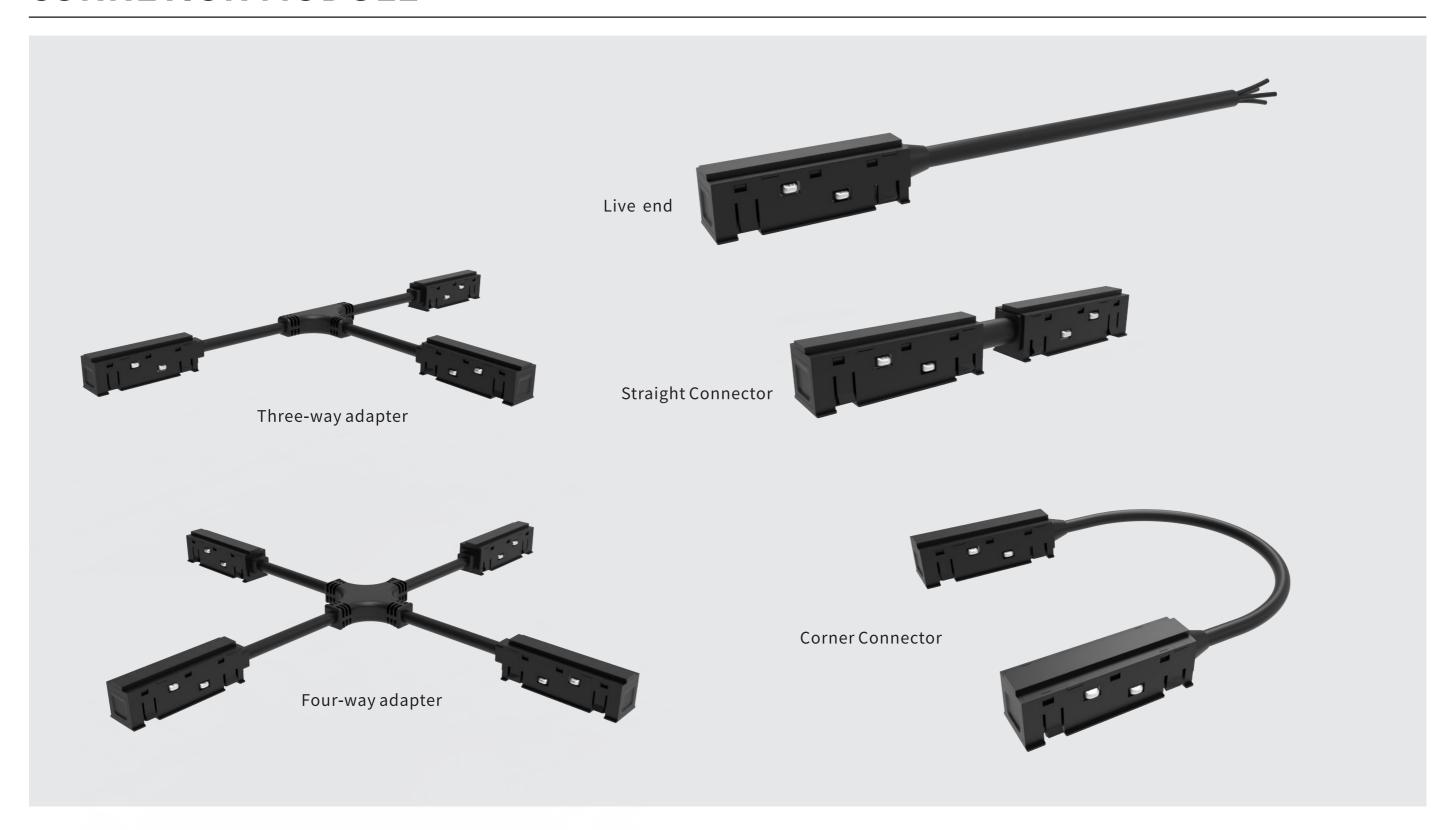



48V POWER SUPPLY

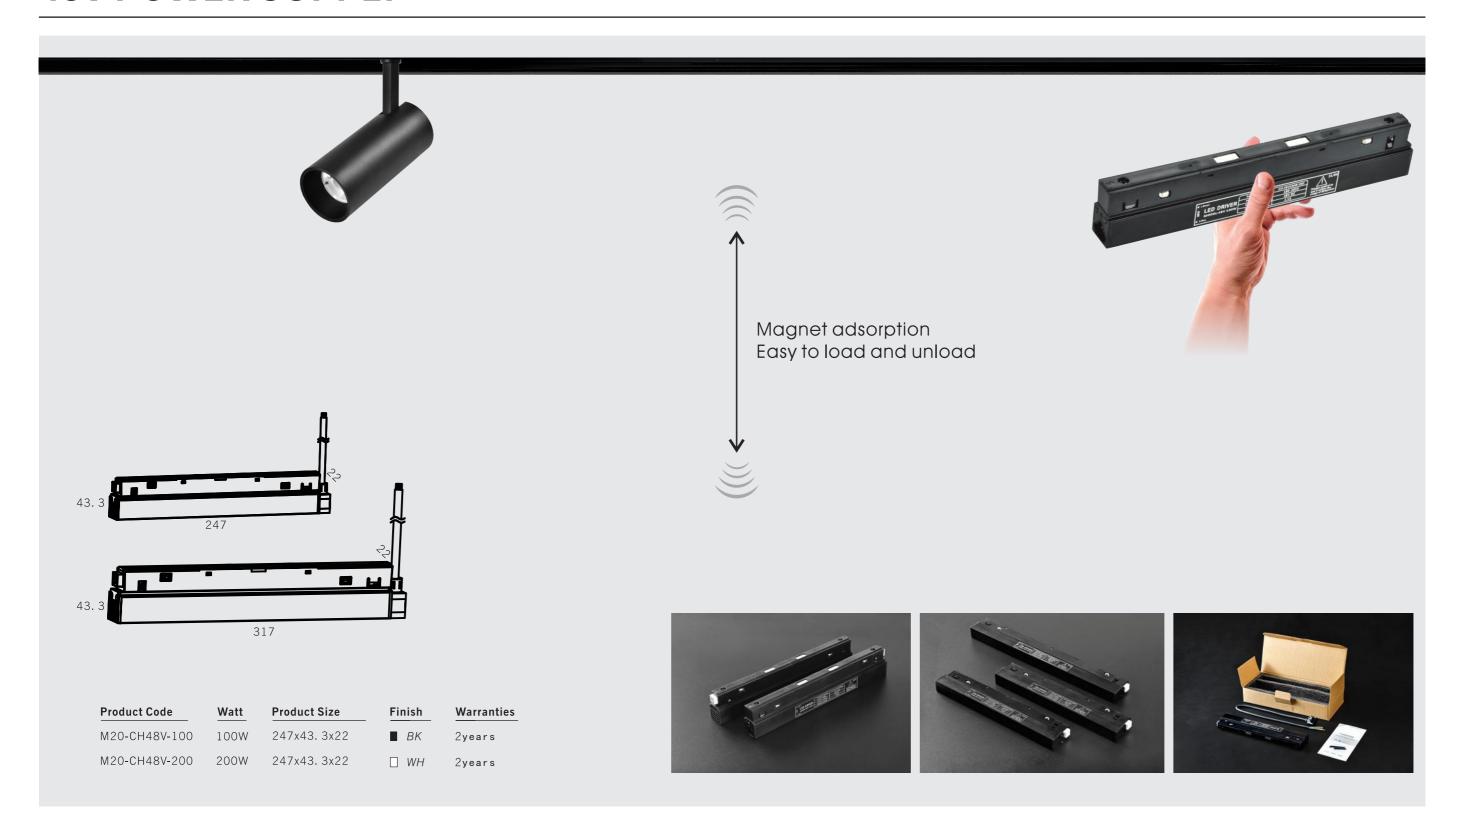



RECESSED DOWNLIGHT



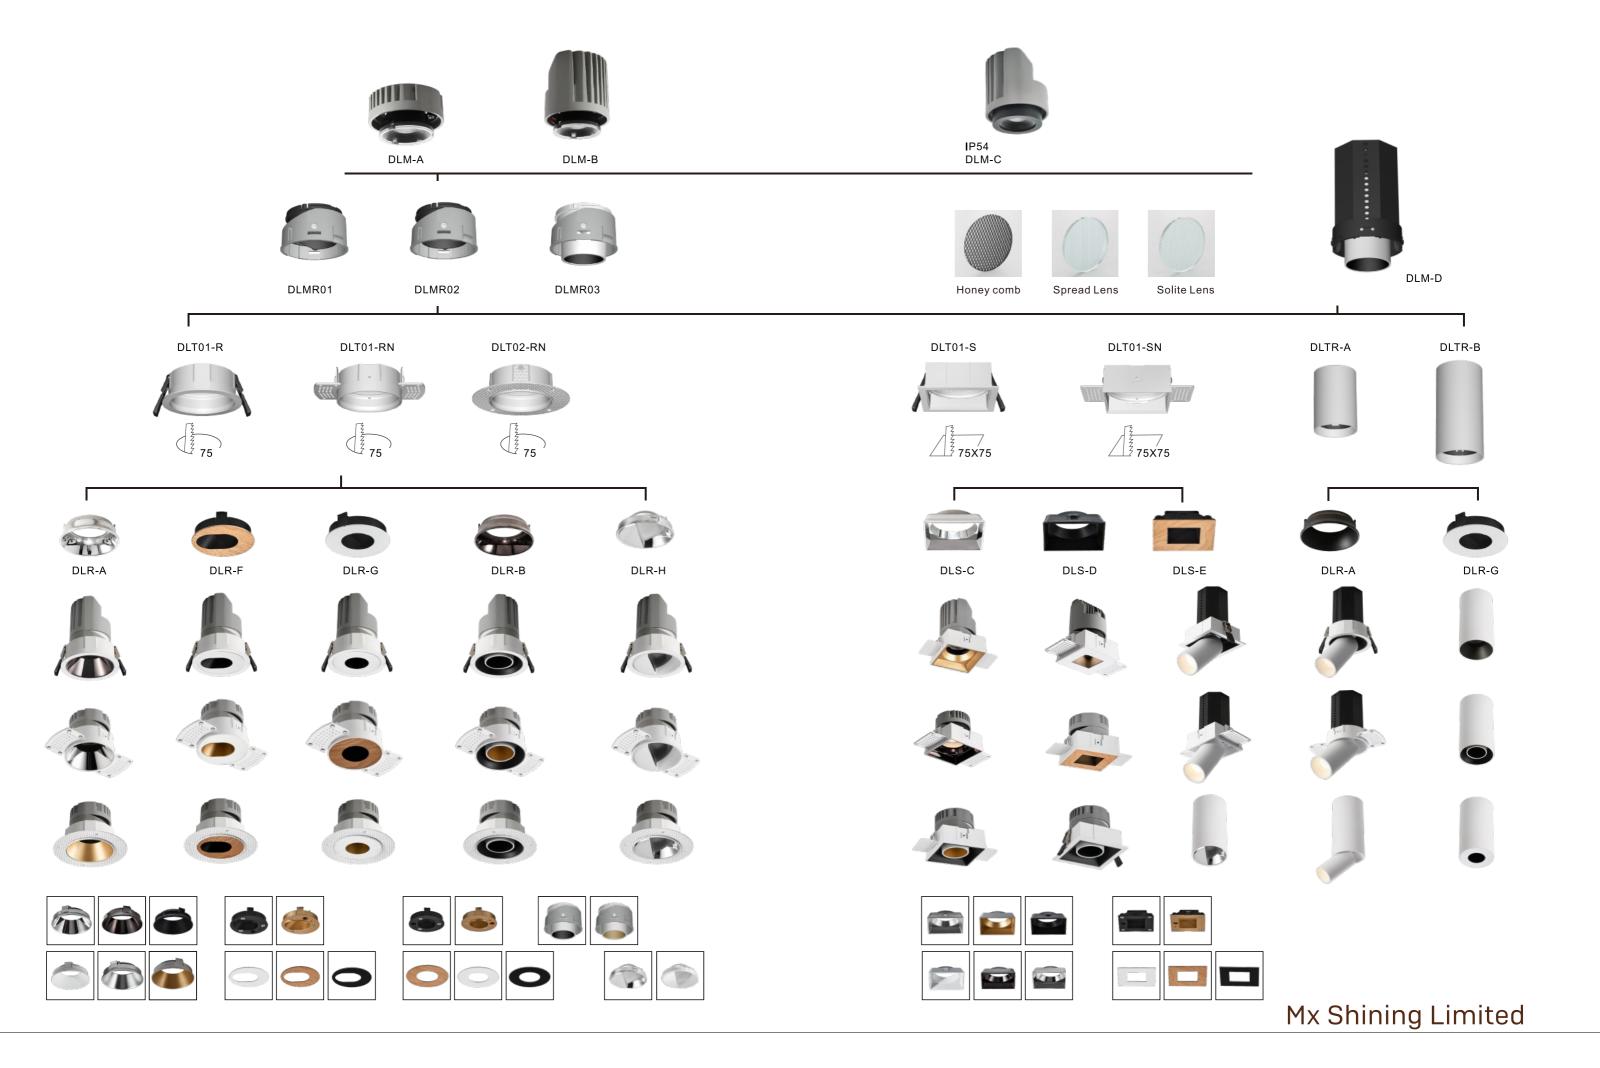

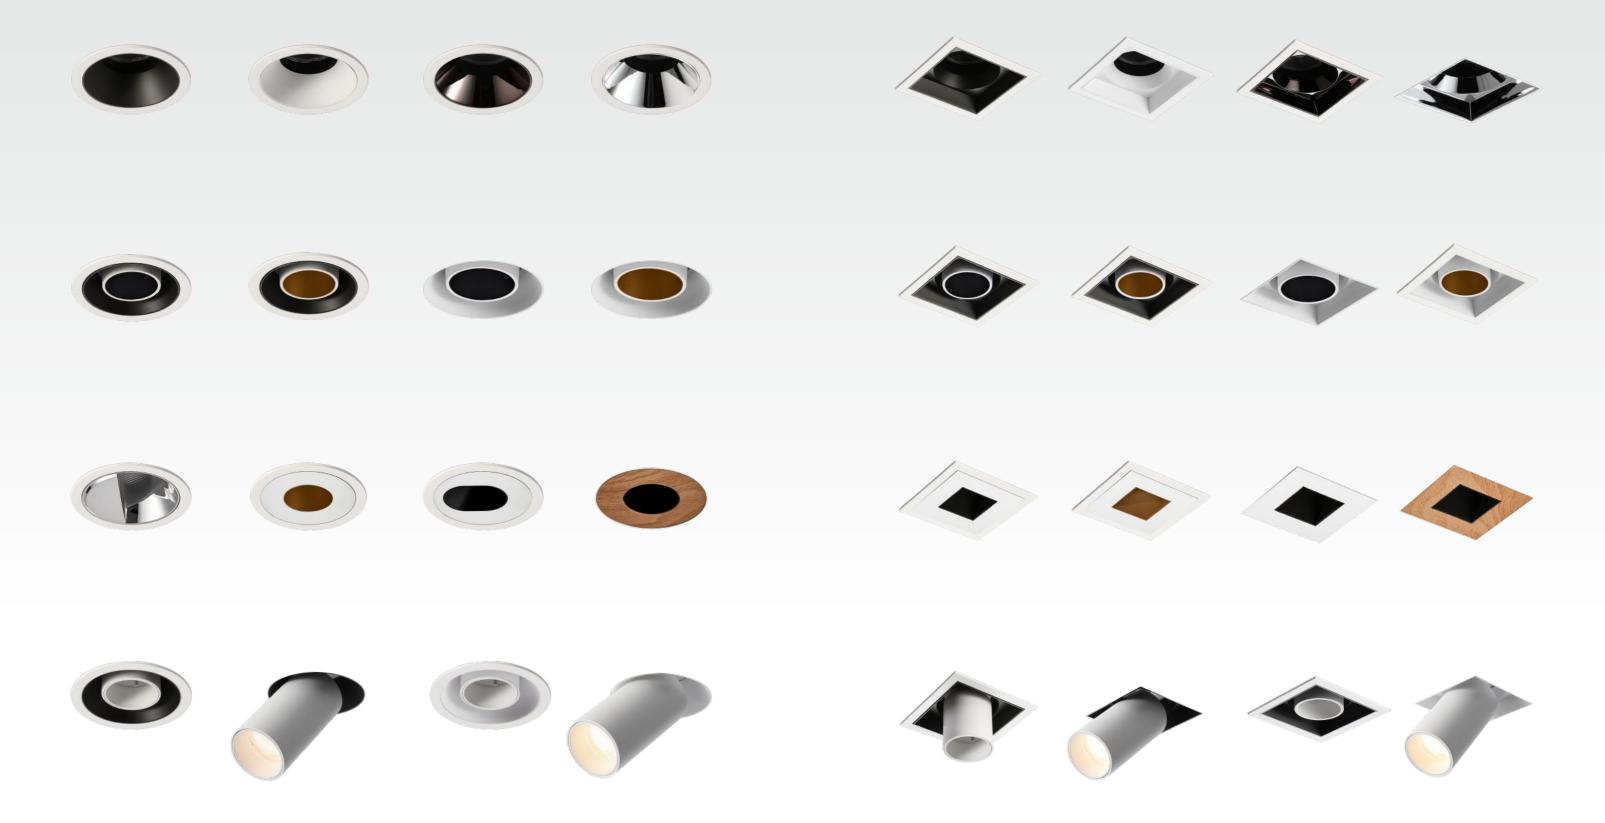

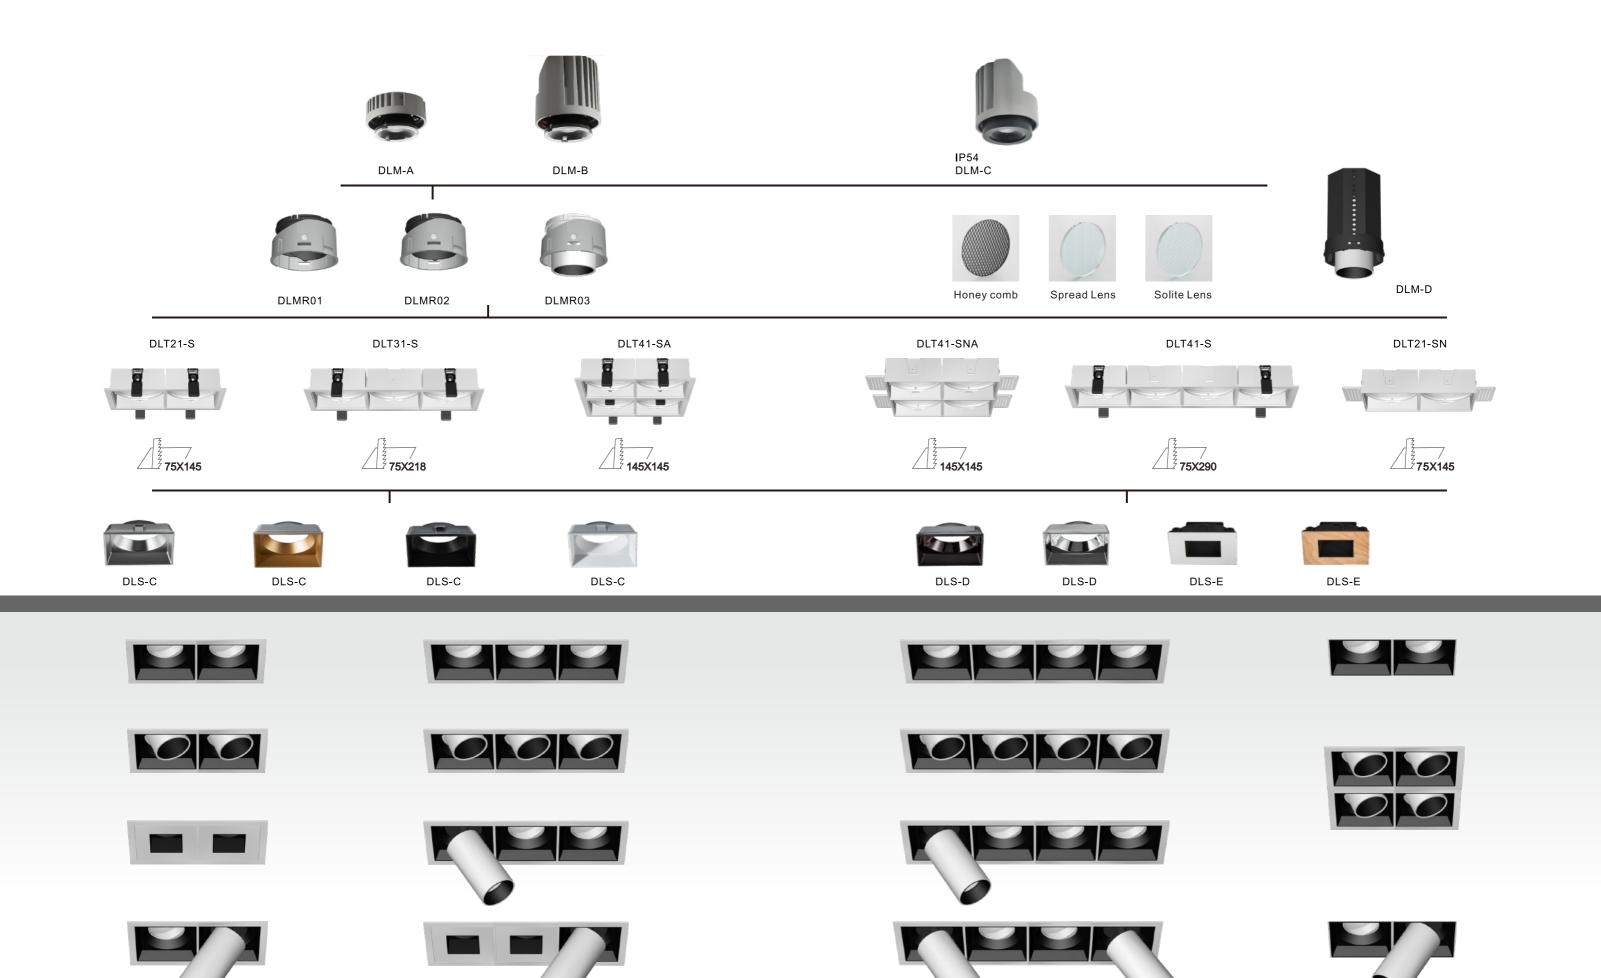


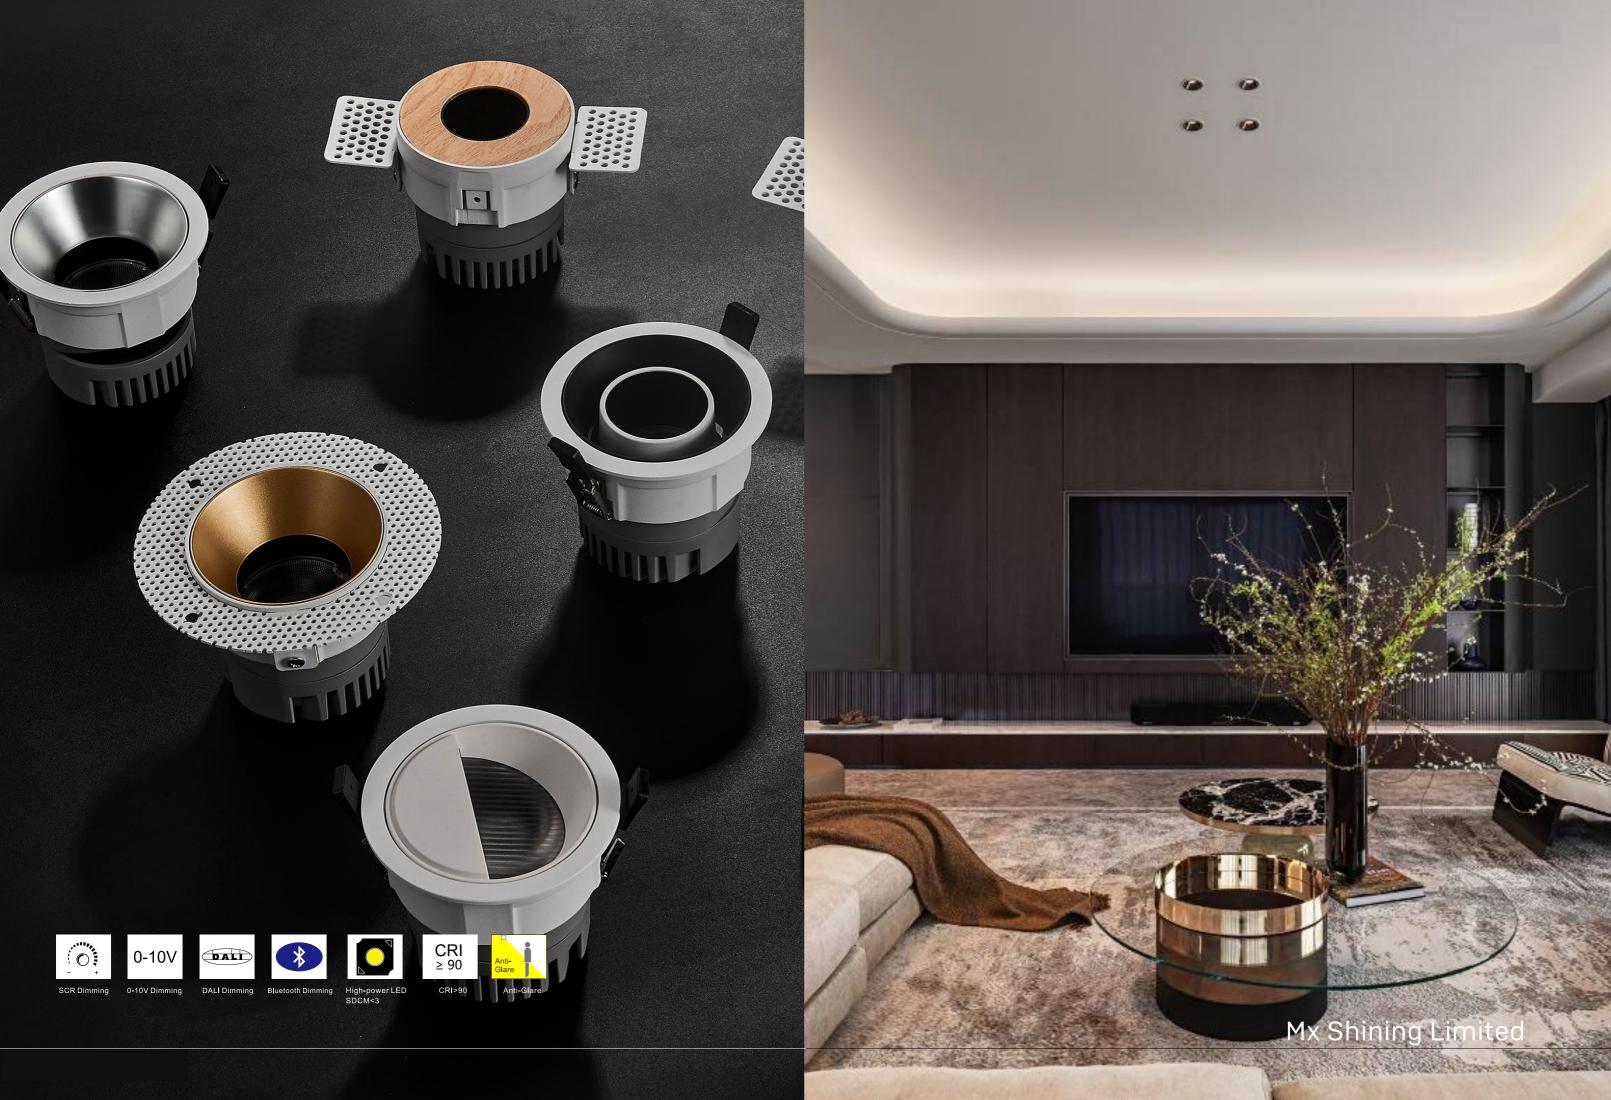



Code No.:DL201-A

Power	MAX 12W						
Voltage	AC 220~240V						
Current	300mA						
Angle	10°	15°	24°	36°	50°		
Lumen	789LM	964LM	1006LM	1021LM	710LN		
CRI	90/98						
IP	20						
Installation	Embed	ded					


















































2700K / 3000K / 3500K / 4000K / 5000K














Code No.:DL201N-A


MAX 12W





2700K / 3000K / 3500K / 4000K / 5000K














Code No.:DL201-B

Power	MAX 18V	٧			
Voltage	AC 220~	240V			
Current	450mA				
Angle	10°	15°	24°	36°	50°
Lumen	1183LM	1446LM	1509LM	1531LM	1065L/
CRI	90/98				
IP	20/54				
Installation	Embedo	ded			
	Voltage Current Angle Lumen CRI	Voltage AC 220~ Current 450mA Angle 10° Lumen 1183LM CRI 90/98 IP 20/54	Voltage AC 220~240V Current 450mA Angle 10° 15° Lumen 1183LM 1446LM CRI 90/98 IP 20/54	Voltage AC 220~240V Current 450mA Angle 10° 15° 24° Lumen 1183LM 1446LM 1509LM CRI 90/98 IP 20/54	Voltage AC 220~240V Current 450mA Angle 10° 15° 24° 36° Lumen 1183LM 1446LM 1509LM 1531LM CRI 90/98 IP 20/54








































































































Code No.:DL201S-A

Power	MAX 12	MAX 12W						
Voltage	AC 220	AC 220~240V						
Current	300mA	300mA						
Angle	10°	15°	24°	36°	50°			
Lumen	789LM	964LM	1006LM	1021LM	710LM			
CRI	90/98							
IP	20							
Installation	Embed	lded						


























PHILIPS LUMINUS CITIZEN CREES bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K













Code No.:DL201S-B

Power	MAX 18W					
Voltage	AC 220~	240V				
Current	450mA	450mA				
Angle	10°	15°	24°	36°	50°	
Lumen	1183LM	1446LM	1509LM	1531LM	1065LN	
CRI	90/98					
IP	20/54					
Installation	Embedo	ded				





















































Code No.:DL221-A

Power	MAX 2*12W							
Voltage	AC 220	AC 220~240V						
Current	300mA							
Angle	10°	15°	24°	36°	50°			
Lumen	789LM	964LM	1006LM	1021LM	710LN			
CRI	90/98							
IP	20							
Installation	Embed	ded						






























PHILIPS LUMINUS CITIZEN CREES bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K















Code No.:DL221-B

Power	MAX 2*1	8W				
Voltage	AC 220~240V					
Current	450mA					
Angle	10°	15°	24°	36°	50°	
Lumen	1183LM	1446LM	1509LM	1531LM	1065LN	
CRI	90/98					
IP	20/54					
Installation	Embed	ded				

































































Code No.:DL231-A

Power	MAX 3*12W						
Voltage	AC 220	AC 220~240V					
Current	300mA						
Angle	10°	15°	24°	36°	50°		
Lumen	789LM	964LM	1006LM	1021LM	710LM		
CRI	90/98						
IP	20						
Installation	Embed	lded					





























PHILIPS LUMINUS CITIZEN CREES bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K














Code No.:DL231-B

Power	MAX 3*1	MAX 3*18W				
Voltage	AC 220~	240V				
Current	450mA					
Angle	10°	15°	24°	36°	50°	
Lumen	1183LM	1446LM	1509LM	1531LM	1065LN	
CRI	90/98					
IP	20/54					
Installation	Embed	ded				































2700K / 3000K / 3500K / 4000K / 5000K












Code No.:DL241-A

Power	MAX 4*12W					
Voltage	AC 220-	~240V				
Current	300mA					
Angle	10°	15°	24°	36°	50°	
Lumen	789LM	964LM	1006LM	1021LM	710LN	
CRI	90/98					
IP	20					
Installation	Embed	ded				





























2700K / 3000K / 3500K / 4000K / 5000K














Code No.:DL241-B

		_				
Power	MAX 4*18W					
Voltage	AC 220~240V					
Current	450mA					
Angle	10° 15° 24° 36° 50°					
Lumen	1183LM 1446LM 1509LM 1531LM 1065L	Μ				
CRI	90/98					
IP	20/54					
Installation	Embedded					






























Code No.:DL241S-A

Power	MAX 4*12W						
Voltage	AC 220	AC 220~240V					
Current	300mA						
Angle	10°	15°	24°	36°	50°		
Lumen	789LM	964LM	1006LM	1021LM	710LM		
CRI	90/98						
IP	20						
Installation	Embed	lded					
























PHILIPS LUMINUS CITIZEN CREES bridgelux.





2700K / 3000K / 3500K / 4000K / 5000K













Code No.:DL241S-B

Power	MAX 4*1	8W					
Voltage	AC 220~	AC 220~240V					
Current	450mA						
Angle	10°	15°	24°	36°	50°		
Lumen	1183LM	1446LM	1509LM	1531LM	1065LM		
CRI	90/98						
IP	20/54						
Installation	Embed	ded					




















































Code No.:DL201SN-A

Power	MAX 12	MAX 12W						
Voltage	AC 220	AC 220~240V						
Current	300mA	300mA						
Angle	10°	15°	24°	36°	50°			
Lumen	789LM	964LM	1006LM	1021LM	710LM			
CRI	90/98							
IP	20							
Installation	Embed	lded						
























PHILIPS LUMINUS CITIZEN CREES bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K














Code No.:DL201SN-B

Power	MAX 18\	N			
Voltage	AC 220~	240V			
Current	450mA				
Angle	10°	15°	24°	36°	50°
Lumen	1183LM	1446LM	1509LM	1531LM	1065LM
CRI	90/98				
IP	20/54				
Installation	Embed	ded			

































2700K / 3000K / 3500K / 4000K / 5000K










































PHILIPS LUMINUS CITIZEN CREES bridgelux.





2700K / 3000K / 3500K / 4000K / 5000K















Code No.:DL221N-B

Power	MAX 2*18W						
Voltage	AC 220~	240V					
Current	300mA						
Angle	10°	15°	24°	36°	50°		
Lumen	1183LM	1446LM	1509LM	1531LM	1065LN		
CRI	90/98						
IP	20						
Installation	Embedo	ded					





































Code No.:DL241SN-A

Power	MAX 4*	12W						
Voltage	AC 220-	AC 220~240V						
Current	300mA	300mA						
Angle	10°	15°	24°	36°	50°			
Lumen	789LM	964LM	1006LM	1021LM	710LM			
CRI	90/98							
IP	20							
Installation	Embed	ded						




















PHILIPS LUMINUS CITIZEN CREED bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K














Code No.:DL241SN-B

Power	MAX 4*1	8W				
Voltage	AC 220~240V					
Current	450mA					
Angle	10°	15°	24°	36°	50°	
Lumen	1183LM	1446LM	1509LM	1531LM	1065LN	
CRI	90/98					
IP	20/54					
Installation	Embedo	ded				































2700K / 3000K / 3500K / 4000K / 5000K
















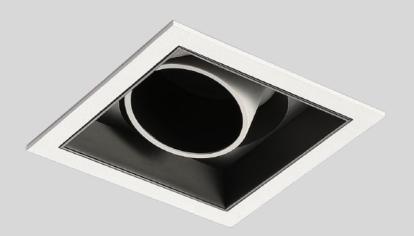
























Code No.:DL302-A

Power	MAX 12	MAX 12W							
Voltage	AC 220	AC 220~240V							
Current	300mA	300mA							
Angle	10°	15°	24°	36°	50°				
Lumen	789LM	964LM	1006LM	1021LM	710LN				
CRI	90/98								
IP	20								
Installation	Embed	ded							































PHILIPS LUMINUS CITIZEN CREES bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K















Power	MAX 18\	N			
Voltage	AC 220~240V				
Current	450mA				
Angle	10°	15°	24°	36°	50°
Lumen	1183LM	1446LM	1509LM	1531LM	1065LN
CRI	90/98				
IP	20/54				
Installation	Embed	ded			































2700K / 3000K / 3500K / 4000K / 5000K













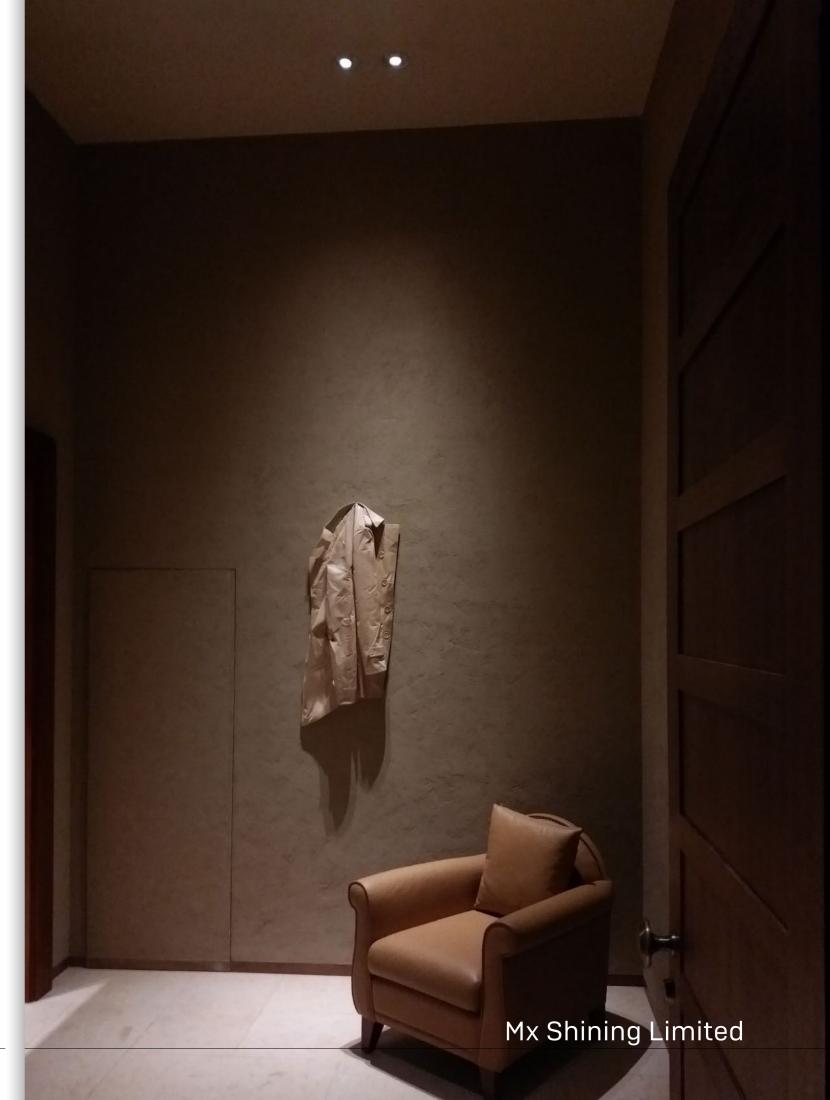



Code No.:DL302N-A

Power	MAX 12	W					
Voltage	AC 220-	AC 220~240V					
Current	300mA						
Angle	10°	15°	24°	36°	50°		
Lumen	789LM	964LM	1006LM	1021LM	710LM		
CRI	90/98						
IP	20						
Installation	Embed	ded					




































PHILIPS LUMINUS CITIZEN CREES bridgelux.









2700K / 3000K / 3500K / 4000K / 5000K














Code No.:DL302S-A



2700K / 3000K / 3500K / 4000K / 5000K

















Power MAX 18W Voltage AC 220~240V Current 450mA Angle 10° 15° 24° 36° 50° Lumen 1183LM 1446LM 1509LM 1531LM 1065L CRI 90/98 IP 20/54 Installation Embedded						
Current 450mA Angle 10° 15° 24° 36° 50° Lumen 1183LM 1446LM 1509LM 1531LM 1065L CRI 90/98 IP 20/54	Power	MAX 18V	٧			
Angle 10° 15° 24° 36° 50° Lumen 1183LM 1446LM 1509LM 1531LM 1065L CRI 90/98 IP 20/54	Voltage	AC 220~	240V			
Lumen 1183LM 1446LM 1509LM 1531LM 1065L CRI 90/98 IP 20/54	Current	450mA				
CRI 90/98 IP 20/54	Angle	10°	15°	24°	36°	50°
IP 20/54	Lumen	1183LM	1446LM	1509LM	1531LM	1065L
· · · · · · · · · · · · · · · · · · ·	CRI	90/98				
Installation Embedded	IP	20/54				
	Installation	Embedo	ded			


















































































PHILIPS LUMINUS CITIZEN CREE® bridgelux.




















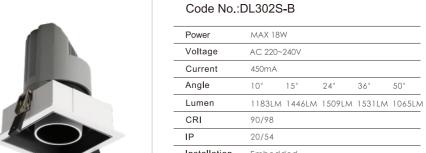








































Mx Shining Limited



Code No.:DL322-A

MAX 2*12W						
AC 220~240V						
300mA						
10°	15°	24°	36°	50°		
789LM	964LM	1006LM	1021LM	710LM		
90/98						
20						
Embed	ded					
	AC 220- 300mA 10° 789LM 90/98	AC 220~240V 300mA 10° 15° 789LM 964LM 90/98	AC 220-240V 300mA 10° 15° 24° 789LM 964LM 1006LM 90/98 20	AC 220~240V 300mA 10° 15° 24° 36° 789LM 964LM 1006LM 1021LM 90/98 20		




































Code No.:DL322-B

Power	MAX 2*1	8W					
Voltage	AC 220~	AC 220~240V					
Current	450mA						
Angle	10°	15°	24°	36°	50°		
Lumen	1183LM	1446LM	1509LM	1531LM	1065LM		
CRI	90/98						
IP	20/54						
Installation	Embed	ded					






















2700K / 3000K / 3500K / 4000K / 5000K












Code No.:DL332-A













PHILIPS LUMINUS CITIZEN CREES bridgelux.



















2700K / 3000K / 3500K / 4000K / 5000K


















Power	MAX 3*1	8W			
Voltage	AC 220~	240V			
Current	450mA				
Angle	10°	15°	24°	36°	50°
Lumen	1183LM	1446LM	1509LM	1531LM	1065LM
CRI	90/98				
IP	20/54				
Installation	Embed	ded			







— 227mm*84mm —
































Code No.:DL342-A

Power	MAX 4*	MAX 4*12W							
Voltage	AC 220-	~240V							
Current	300mA								
Angle	10°	15°	24°	36°	50°				
Lumen	789LM	964LM	1006LM	1021LM	710LN				
CRI	90/98								
IP	20								
Installation	Embed	ded							












MAX 4*12W Voltage AC 220~240V Current 789LM 964LM 1006LM 1021LM 710LM

Embedded




































Code No.:DL342S-A







2700K / 3000K / 3500K / 4000K / 5000K





2700K / 3000K / 3500K / 4000K / 5000K














Code No.:DL342-B

Power	MAX 4*18W					
Voltage	AC 220~240V					
Current	450mA					
Angle	10°	15°	24°	36°	50°	
Lumen	1183LM	1446LM	1509LM	1531LM	1065LN	
CRI	90/98					
IP	20/54					
Installation	Embed	ded				














Power	MAX 4*1	8W					
Voltage	AC 220~	AC 220~240V					
Current	450mA	450mA					
Angle	10°	15°	24°	36°	50°		
Lumen	1183LM	1446LM	1509LM	1531LM	1065LN		
CRI	90/98						
IP	20/54						
Installation	Embedo	ded					







156mm*156mm →



























































Mx Shining Limited




Code No.:DL302SN-A

Power	MAX 12	W				
Voltage	AC 220	~240V				
Current	300mA	300mA				
Angle	10°	15°	24°	36°	50°	
Lumen	789LM	964LM	1006LM	1021LM	710LM	
CRI	90/98					
IP	20					
Installation	Embed	lded				
































2700K / 3000K / 3500K / 4000K / 5000K















Code No.:DL302SN-B

	Power	MAX 18W					
_	Voltage	AC 220~240V					
_	Current	450mA					
_	Angle	10°	15°	24°	36°	50°	
_	Lumen	1183LM	1446LM	1509LM	1531LM	1065LN	
_	CRI	90/98					
_	IP	20/54					
_	Installation	Embedo	ded				

















PHILIPS LUMINUS CITIZEN CREES bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

































Code No.:DL322N-A

Power	MAX 2*	12W					
Voltage	AC 220-	AC 220~240V					
Current	300mA						
Angle	10°	15°	24°	36°	50°		
Lumen	789LM	964LM	1006LM	1021LM	710LN		
CRI	90/98						
IP	20						
Installation	Embed	ded					


























2700K / 3000K / 3500K / 4000K / 5000K
















Power	MAX 2*1	8W					
Voltage	AC 220~	AC 220~240V					
Current	450mA	450mA					
Angle	10°	15°	24°	36°	50°		
Lumen	1183LM	1446LM	1509LM	1531LM	1065LN		
CRI	90/98						
IP	20/54						
Installation	Embed	ded					












































Code No.:DL342SN-A

Power	MAX 4*	12W						
Voltage	AC 220-	AC 220~240V						
Current	300mA							
Angle	10°	15°	24°	36°	50°			
Lumen	789LM	964LM	1006LM	1021LM	710LM			
CRI	90/98							
IP	20							
Installation	Embed	ded						




















PHILIPS LUMINUS CITIZEN CREES bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K















Code No.:DL342SN-B

Power	MAX 4*1	MAX 4*18W						
Voltage	AC 220~	AC 220~240V						
Current	450mA	450mA						
Angle	10°	15°	24°	36°	50°			
Lumen	1183LM	1446LM	1509LM	1531LM	1065LM			
CRI	90/98							
IP	20/54							
Installation	Embed	ded						







145mm*145mr




























2700K / 3000K / 3500K / 4000K / 5000K















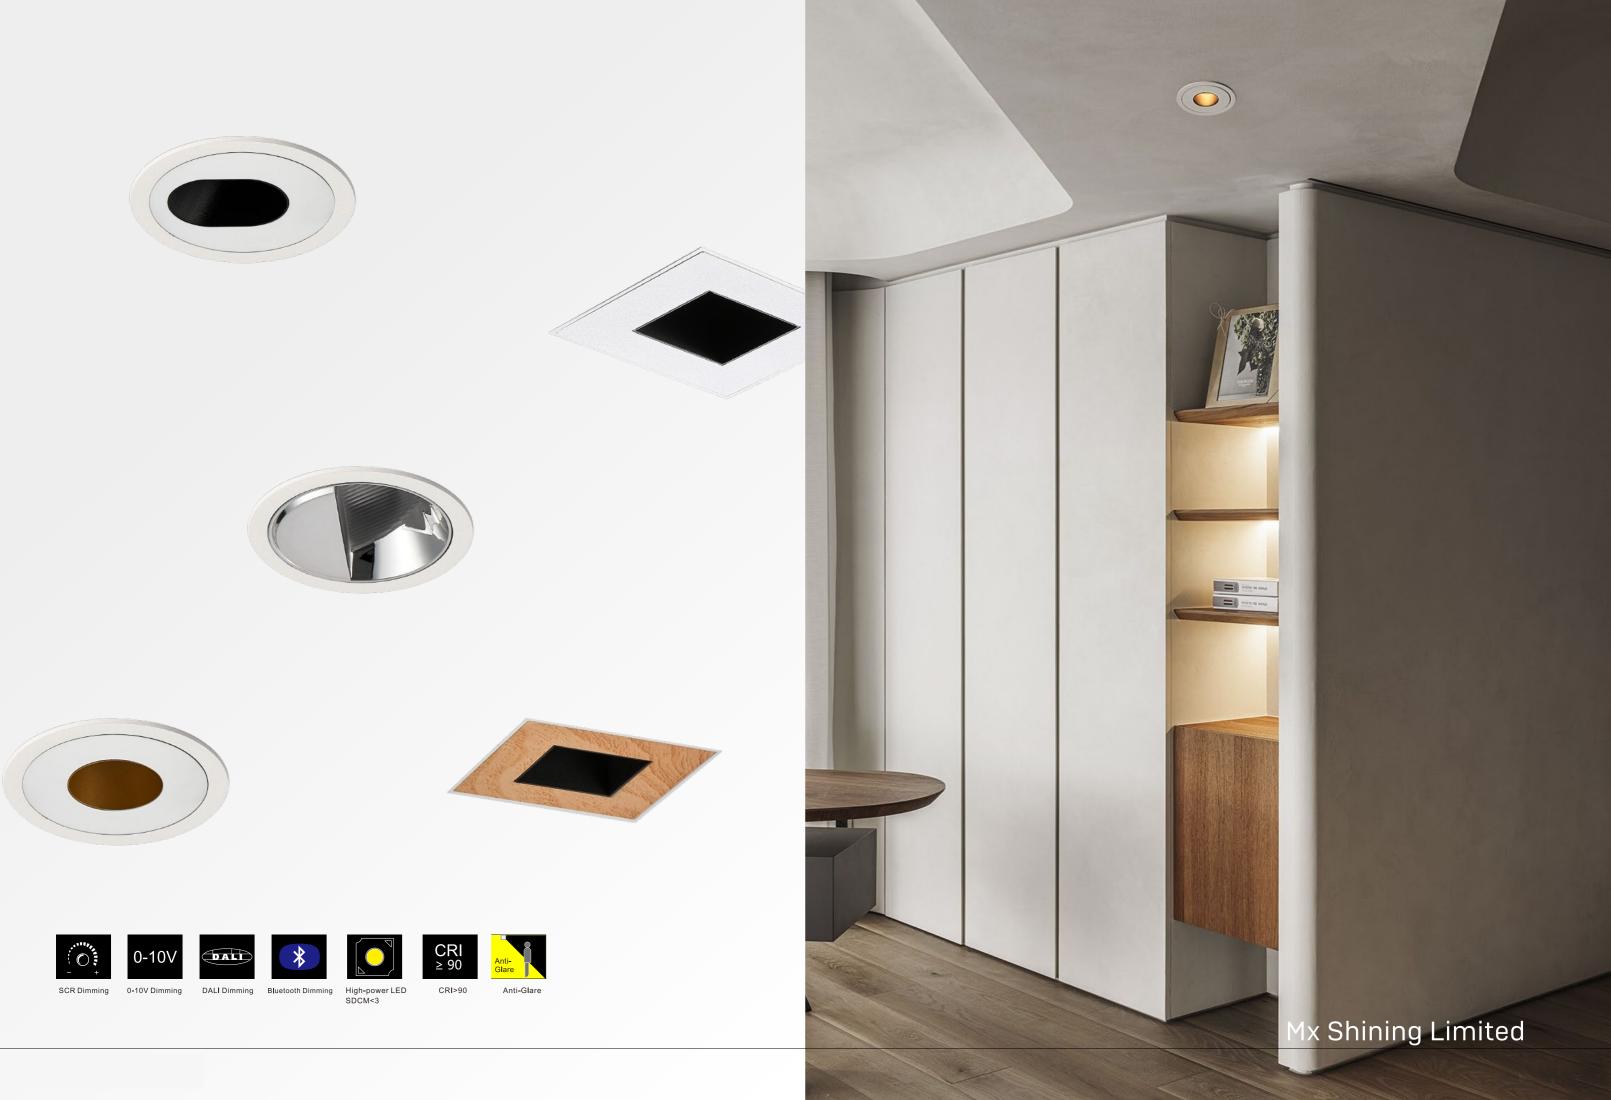




Code No.:DL205-A

Power	MAX 12	:W					
Voltage	AC 220	~240V					
Current	300mA	300mA					
Angle	10°	15°	24°	36°	50°		
Lumen	789LM	964LM	1006LM	1021LM	710LM		
CRI	90/98						
IP	20						
Installation	Embed	lded					









MAX 12W

Code No.:DL205N-A




























































	Power	MAX 18W				
	Voltage	AC 220~240V				
	Current	450mA				
	Angle	10°	15°	24°	36°	50°
	Lumen	1183LM	1446LM	1509LM	1531LM	1065LN
_	CRI	90/98				
_	IP	20/54				
_	Installation	Embedo	ded			































































PHILIPS LUMINUS CITIZEN CREE® bridgelux.



























Code No.:DL205N-B









































Code No.:DL206-A

Power	MAX 12	MAX 12W							
Voltage	AC 220	AC 220~240V							
Current	300mA	300mA							
Angle	10°	15°	24°	36°	50°				
Lumen	789LM	964LM	1006LM	1021LM	710LM				
CRI	90/98	90/98							
IP	20								
Installation	Embed	lded							


































2700K / 3000K / 3500K / 4000K / 5000K
















Power	MAX 18\	V				
Voltage	AC 220~240V					
Current	450mA					
Angle	10°	15°	24°	36°	50°	
Lumen	1183LM	1446LM	1509LM	1531LM	1065LM	
CRI	90/98					
IP	20/54					
Installation	Embed	ded				




































Code No.:DL206N-A MAX 12W


























PHILIPS LUMINUS CITIZEN CREES bridgelux.





2700K / 3000K / 3500K / 4000K / 5000K

























































Code No.:DL204-A

MAX 12W
AC 220~240V
300mA
polarized
605LM
90/98
20
Embedded














PHILIPS LUMINUS CITIZEN CREES bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K



Code No.:DL204-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	polarized
Lumen	902LM
CRI	90/98
IP	20/54
Installation	Embedded









Reflector





2700K / 3000K / 3500K / 4000K / 5000K

PHILIPS LUMINUS CITIZEN CREES bridgelux




Code No.:DL204N-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	polarized
Lumen	605LM
CRI	90/98
IP	20
Installation	Embedded
















PHILIPS LUMINUS CITIZEN CREES bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K



Code No.:DL204N-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	polarized
Lumen	902LM
CRI	90/98
IP	20/54
Installation	Embedded








Reflector










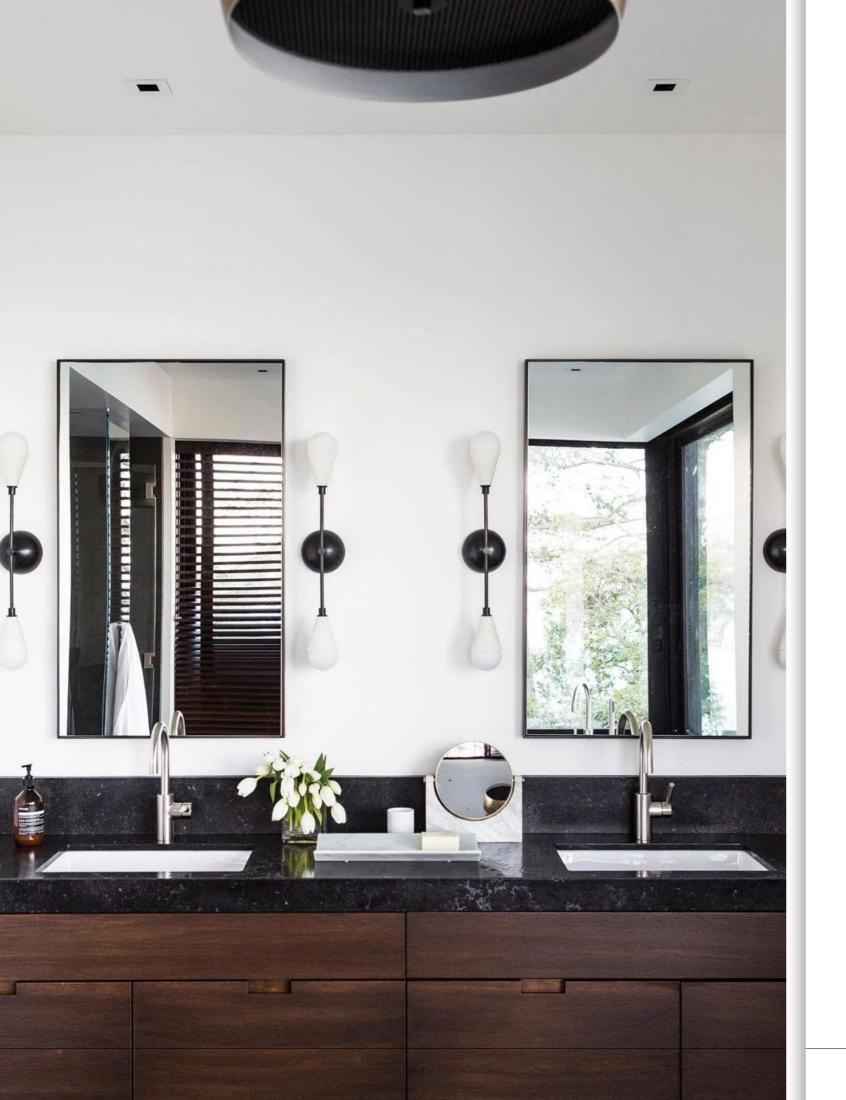





Code No.:DL207S-A

Power	MAX 12	W			
Voltage	AC 220-	-240V			
Current	300mA				
Angle	10°	15°	24°	36°	50°
Lumen	789LM	964LM	1006LM	1021LM	710LN
CRI	90/98				
IP	20				
Installation	Embed	ded			


















PHILIPS LUMINUS CITIZEN CREES bridgelux.























MAX 18V	٧				
AC 220~240V					
450mA					
10°	15°	24°	36°	50°	
1183LM	1446LM	1509LM	1531LM	1065LN	
90/98					
20/54					
Embedo	ded				
	AC 220~ 450mA 10° 1183LM 90/98 20/54	450mA 10° 15° 1183LM 1446LM 90/98	AC 220~240V 450mA 10° 15° 24° 1183LM 1446LM 1509LM 90/98 20/54	AC 220~240V 450mA 10° 15° 24° 36° 1183LM 1446LM 1509LM 1531LM 90/98 20/54	













PHILIPS LUMINUS CITIZEN CREES bridgelux. 2700K / 3000K / 3500K / 4000K / 5000K





















Code No.:DL207SN-A

Power	MAX 12W						
Voltage	AC 220~240V						
Current	300mA						
Angle	10°	15°	24°	36°	50°		
Lumen	789LM	964LM	1006LM	1021LM	710LN		
CRI	90/98						
IP	20						
Installation	Embedded						












































Code No.:DL207SN-B

Power	MAX 18\	N					
Voltage	AC 220~240V						
Current	450mA						
Angle	10°	15°	24°	36°	50°		
Lumen	1183LM	1446LM	1509LM	1531LM	1065LM		
CRI	90/98	90/98					
IP	20/54						
Installation	Embed	ded					





















2700K / 3000K / 3500K / 4000K / 5000K

















Code No.:DL227-A



















PHILIPS LUMINUS CITIZEN CREE® bridgelux. 2700K / 3000K / 3500K / 4000K / 5000K






















Power	MAX 2*18W							
Voltage	AC 220~240V							
Current	450mA							
Angle	10°	15°	24°	36°	50°			
Lumen	1183LM	1446LM	1509LM	1531LM	1065LN			
CRI	90/98							
IP	20/54							
Installation	Embedo	ded						



































Code No.:DL227N-A

Power	MAX 2*	MAX 2*12W						
Voltage	AC 220	AC 220~240V						
Current	300mA	300mA						
Angle	10°	15°	24°	36°	50°			
Lumen	789LM	964LM	1006LM	1021LM	710LM			
CRI	90/98	90/98						
IP	20	20						
Installation	Embed	lded						
















































Code No.:DL227N-B

Power	MAX 2*18W					
Voltage	AC 220~240V					
Current	450mA					
Angle	10°	15°	24°	36°	50°	
Lumen	1183LM	1446LM	1509LM	1531LM	1065LM	
CRI	90/98					
IP	20/54					
Installation	Embedo	ded				





















2700K / 3000K / 3500K / 4000K / 5000K










Code No.:DL237-A

Power	MAX 3*12W						
Voltage	AC 220~240V						
Current	300mA						
Angle	10°	15°	24°	36°	50°		
Lumen	789LM	964LM	1006LM	1021LM	710LN		
CRI	90/98						
IP	20						
Installation	Embedded						



























2700K / 3000K / 3500K / 4000K / 5000K






Code No.:DL237-B

		_					
Power	MAX 3*18W						
Voltage	AC 220~240V						
Current	450mA						
Angle	10° 15° 24° 36° 50°	_					
Lumen	1183LM 1446LM 1509LM 1531LM 1065L	M					
CRI	90/98	_					
IP	20/54	_					
Installation	Embedded	_					






























































Code No.:DL403

Power	MAX 10W						
Voltage	AC 22	AC 220~240V					
Current	3W 7	3W 700mA 10W 250mA					
Angle	3°	7°	15°	24°	36°	60°	
Lumen	342LM	379LM	803LM	838LM	850LM	591LM	
CRI	90/98	}					
IP	20						
Installation	Embe	dded					








































PHILIPS LUMINUS CITIZEN CREES bridgelux.





















Power	MAX 10W						
Voltage	AC 22	AC 220~240V					
Current	3W 700	3W 700mA 10W 250mA					
Angle	3°	7°	15°	24°	36°	60°	
Lumen	342LM	379LM	803LM	838LM	850LM	591LM	
CRI	90/98	3					
IP	20						
Installation	Embe	edded					


























































Code No.:DL403S

Power	MAX 10W						
Voltage	AC 22	AC 220~240V					
Current	3W 700	3W 700mA 10W 250mA					
Angle	3°	7°	15°	24°	36°	60°	
Lumen	342LM	379LM	803LM	838LM	850LM	591LM	
CRI	90/98	3					
IP	20						
Installation	Embe	edded					


































PHILIPS LUMINUS CITIZEN CREES bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

















Code No.:DL403SN

Power	MAX	10W				
Voltage	AC 22	AC 220~240V				
Current	3W 700	lmA		10'	W 250mA	
Angle	3°	7°	15°	24°	36°	60°
Lumen	342LM	379LM	803LM	838LM	850LM	591LM
CRI	90/98	3				
IP	20					
Installation	Embe	edded				


























Angle















Code No.:DL423 MAX 2*10W Voltage AC 220~240V 342LM 379LM 803LM 838LM 850LM 591LM

Embedded



Installation

























2700K / 3000K / 3500K / 4000K / 5000K










Code No.:DL423N

Power	MAX 2*10W					
Voltage	AC 220~240V					
Current	3W 700mA 10W 250mA					
Angle	3°	7°	15°	24°	36°	60°
Lumen	342LM	379LM	803LM	838LM	850LM	591LM
CRI	90/98	3				
IP	20					
Installation	Embe	edded				





























Code No.:DL433

Power	MAX 3*10W					
Voltage	AC 220~240V					
Current	3W 700	3W 700mA 10W 250mA				
Angle	3°	7°	15°	24°	36°	60°
Lumen	342LM	379LM	803LM	838LM	850LM	591LM
CRI	90/98	3				
IP	20					
Installation	Embe	edded				




























Code No.:DL443

Power	MAX 4*10W					
Voltage	AC 220~240V					
Current	3W 700mA 10W 250mA					
Angle	3°	7°	15°	24°	36°	60°
Lumen	342LM	379LM	803LM	838LM	850LM	591LM
CRI	90/98	3				
IP	20					
Installation	Embe	edded				











 \sqrt{P}



















2700K / 3000K / 3500K / 4000K / 5000K





Code No.:DL443S

Power	MAX	4*10W				
Voltage	AC 22	0~240\	/			
Current	3W 700	lmA		10'	W 250mA	
Angle	3°	7°	15°	24°	36°	60°
Lumen	342LM	379LM	803LM	838LM	850LM	591LM
CRI	90/98	}				
IP	20					
Installation	Embe	dded				






















PHILIPS LUMINUS CITIZEN CREES bridgelux.




2700K / 3000K / 3500K / 4000K / 5000K









Power	MAX	MAX 4*10W					
Voltage	AC 220~240V						
Current	3W 700	3W 700mA 10W 250mA					
Angle	3°	7°	15°	24°	36°	60°	
Lumen	342LM	379LM	803LM	838LM	850LM	591LM	
CRI	90/98	3					
IP	20						
Installation	Embe	edded					

















































































2700K / 3000K / 3500K / 4000K / 5000K
















Power	MAX 2*	MAX 2*10W					
Voltage	AC 220-	AC 220~240V					
Current	250mA	250mA					
Angle	15°	24°	36°	60°			
Lumen	678LM	694LM	715LM	740LM			
CRI	90/98						
IP	20						
Installation	Embed	ded					







145mm*75mm




























Code No.:DL238

Power	MAX 3*10W							
Voltage	AC 220~	AC 220~240V						
Current	250mA	250mA						
Angle	15°	15° 24° 36° 60°						
Lumen	678LM	694LM	715LM	740LM				
CRI	90/98							
IP	20							
Installation	Embed	ded						










































Power	MAX 3*	MAX 3*10W						
Voltage	AC 220~	AC 220~240V						
Current	250mA	250mA						
Angle	15°	24°	36°	60°				
Lumen	678LM	694LM	715LM	740LM				
CRI	90/98							
IP	20							
Installation	Embed	ded						


















2700K / 3000K / 3500K / 4000K / 5000K











Code No.:DL248

Power	MAX 4*10W					
Voltage	AC 220~	AC 220~240V				
Current	250mA					
Angle	15°	24°	36°	60°		
Lumen	678LM	694LM	715LM	740LM		
CRI	90/98					
IP	20					
Installation	Embedded					
























PHILIPS LUMINUS CITIZEN CREES bridgelux




2700K / 3000K / 3500K / 4000K / 5000K














Power	MAX 4*1	MAX 4*10W			
Voltage	AC 220~	AC 220~240V			
Current	250mA				
Angle	15°	24°	36°	60°	
Lumen	678LM	694LM	715LM	740LM	
CRI	90/98				
IP	20				
Installation	Embedded				


































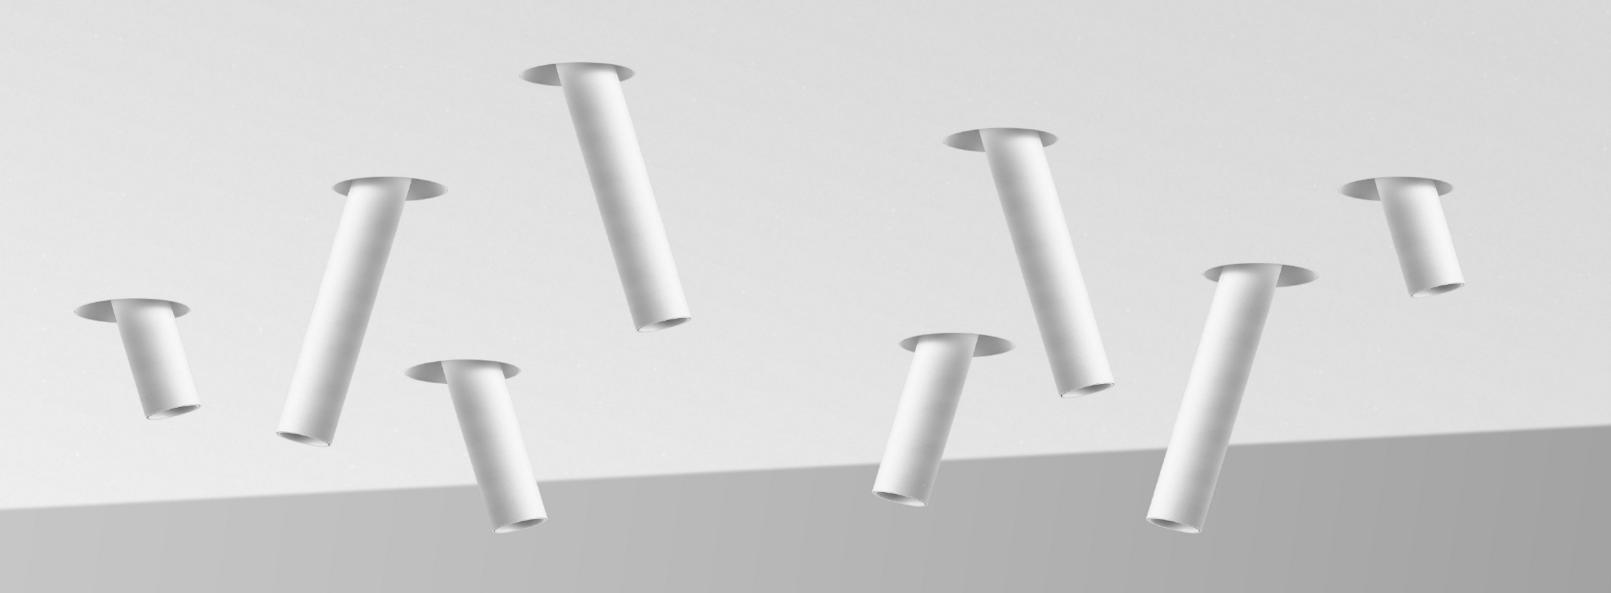






















Code No.:DL203

Power	MAX 10	W		
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	803LM	838LM	850LM	591LM
CRI	90/98			
IP	20			
Installation	Embed	ded		













Installation

Voltage




Code No.:DL203S



Embedded

AC 220~240V 250mA



(355⁸)







































Power	MAX 10	W		
Voltage	AC 220~	AC 220~240V		
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	803LM	838LM	850LM	591LM
CRI	90/98			
IP	20			
Installation	Embed	ded		






































2700K / 3000K / 3500K / 4000K / 5000K
































2700K / 3000K / 3500K / 4000K / 5000K














Power	MAX 10	W		
Voltage	AC 220-	AC 220~240V		
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	803LM	838LM	850LM	591LM
CRI	90/98			
IP	20			
Installation	Embed	ded		


































































Code No.:DL509-A

Power	MAX 8W				
Voltage	AC 220-	AC 220~240V			
Current	200mA				
Angle	10°	15°	24°	36°	50°
Lumen	525LM	642LM	670LM	680LM	473LM
CRI	90/98				
IP	20				
Installation	Embed	ded			









































PHILIPS LUMINUS CITIZEN CREE® bridgelux.













Code No.:DL509-B

Power	MAX 12W				
Voltage	AC 220-	AC 220~240V			
Current	300mA				
Angle	10°	15°	24°	36°	50°
Lumen	789LM	964LM	1006LM	1021LM	710LN
CRI	90/98				
IP	20				
Installation	Embed	ded			















































Code No.:DL509A-A

Power	MAX 8W				
Voltage	AC 220~	-240V			
Current	200mA				
Angle	10°	15°	24°	36°	50°
Lumen	525LM	642LM	670LM	680LM	473LN
CRI	90/98				
IP	20				
Installation	Embed	ded			
































2700K / 3000K / 3500K / 4000K / 5000K
















Power	MAX 12	MAX 12W			
Voltage	AC 220-	AC 220~240V			
Current	300mA				
Angle	10°	15°	24°	36°	50°
Lumen	789LM	964LM	1006LM	1021LM	710LN
CRI	90/98				
IP	20				
Installation	Embed	ded			






































Code No.:DL509C-A

Power	MAX 8W				
Voltage	AC 220-	AC 220~240V			
Current	200mA				
Angle	10°	15°	24°	36°	50°
Lumen	525LM	642LM	670LM	680LM	473LN
CRI	90/98				
IP	20				
Installation	Embed	ded			


































2700K / 3000K / 3500K / 4000K / 5000K













Code No.:DL509C-B

Power	MAX 12W				
Voltage	AC 220-	AC 220~240V			
Current	300mA				
Angle	10°	15°	24°	36°	50°
Lumen	789LM	964LM	1006LM	1021LM	710LN
CRI	90/98				
IP	20				
Installation	Embed	ded			













































Code No.:DL509B-A

Power	MAX 8W
Voltage	AC 220~240V
Current	200mA
Angle	polarized
Lumen	458LM
CRI	90/98
IP	20
Installation	Surface mounted















2700K / 3000K / 3500K / 4000K / 5000K



Code No.:DL509B-B

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	polarized
Lumen	605LM
CRI	90/98
IP	20
Installation	Surface mounted













2700K / 3000K / 3500K / 4000K / 5000K








Code No.:DL509-D Voltage AC 220~240V 3° 7° 15° 24° 36° 60° 342LM 379LM 803LM 838LM 850LM 591LM

Embedded







Installation


























2700K / 3000K / 3500K / 4000K / 5000K











Fixed

Non adjustable angle





































2700K / 3000K / 3500K / 4000K / 5000K

















Power	MAX 18V	MAX 18W							
Voltage	AC 220~	AC 220~240V							
Current	450mA	450mA							
Angle	10°	15°	24°	36°	50°				
Lumen	1183LM	1446LM	1509LM	1531LM	1065LN				
CRI	90/98								
IP	20/54	20/54							
Installation	Embedo	ded							






















































Mx Shining Limited






SCR Dimming 0-10V Dimming DALI Dimming Bluetooth Dimming


High-power LED SDCM<3



Code No.:DL101N-A

Power	MAX 12W							
Voltage	AC 220~240V							
Current	300mA							
Angle	10°	15°	24°	36°	50°			
Lumen	789LM	964LM	1006LM	1021LM	710LN			
CRI	90/98							
IP	20							
Installation	Embed	ded						






























PHILIPS LUMINUS CITIZEN CREES bridgelux. 2700K / 3000K / 3500K / 4000K / 5000K

















Code No.:DL101N-B

Power	MAX 18W							
Voltage	AC 220~240V							
Current	450mA							
Angle	10°	15°	24°	36°	50°			
Lumen	1183LM	1446LM	1509LM	1531LM	1065LN			
CRI	90/98							
IP	20/54	20/54						
Installation	Embedo	ded						















































Code No.:DL101S-A


Power	MAX 12W							
Voltage	AC 220~240V							
Current	300mA							
Angle	10°	15°	24°	36°	50°			
Lumen	789LM	964LM	1006LM	1021LM	710LM			
CRI	90/98							
IP	20							
Installation	Embed	lded						













Embedded

Code No.:DL101SN-A




















PHILIPS LUMINUS CITIZEN CREES bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K













Code No.:DL101S-B

Power	MAX 18W							
Voltage	AC 220~240V							
Current	450mA	450mA						
Angle	10°	15°	24°	36°	50°			
Lumen	1183LM	1446LM	1509LM	1531LM	1065LM			
CRI	90/98							
IP	20/54							
Installation	Embedo	ded						













|-- 84mm*84mm--|















2700K / 3000K / 3500K / 4000K / 5000K


PHILIPS LUMINUS CITIZEN CREES bridgelux


























Installation




















Code No.:DL101SN-B

Power	MAX 18\	MAX 18W						
Voltage	AC 220~	AC 220~240V						
Current	450mA	450mA						
Angle	10°	15°	24°	36°	50°			
Lumen	1183LM	1446LM	1509LM	1531LM	1065LN			
CRI	90/98							
IP	20/54	20/54						
Installation	Embed	ded						





|--73mm*73mm→|



























LINEAR DOWNLIGHT

LINE LAMP Pre embedded long strip spotlights


















XM003

XM002


Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XM002	MAX 6W	36V	150mA	50°/80°	573 lm	90	20	Surface mounted
XM003	MAX 12W	36V	300mA	50°/80°	1151 lm	90	20	

Chip Brand





2700K|3000K|3500K|4000K|5000K

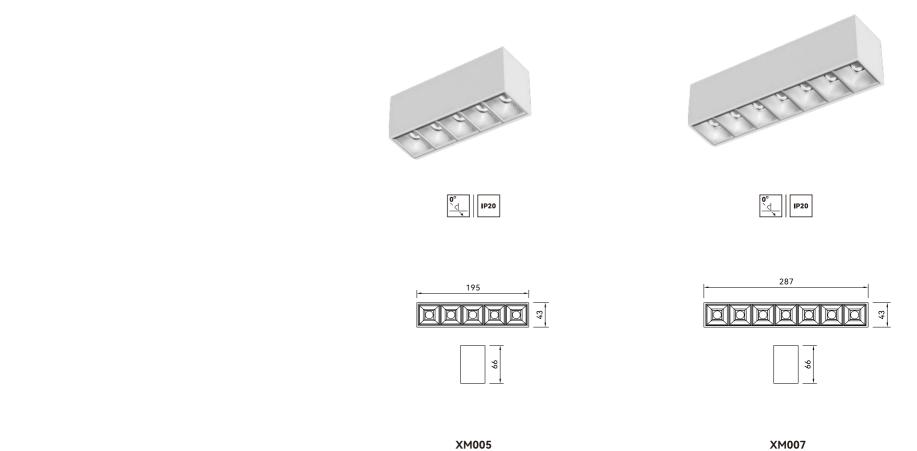

XM005

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XM005	MAX 20W	36V	500mA	50°/80°	1913 lm	90	20	Surface mounted
XM007	MAX 30W	36V	700mA	50°/80°	 2862 lm	90	20	












Line lamp

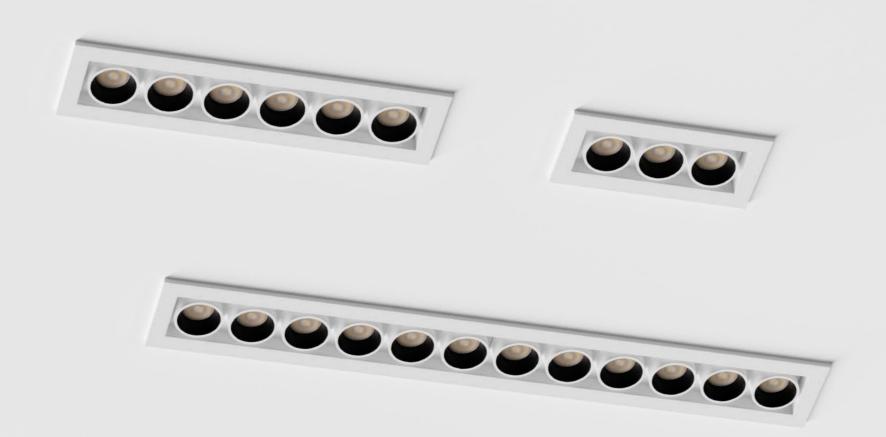




















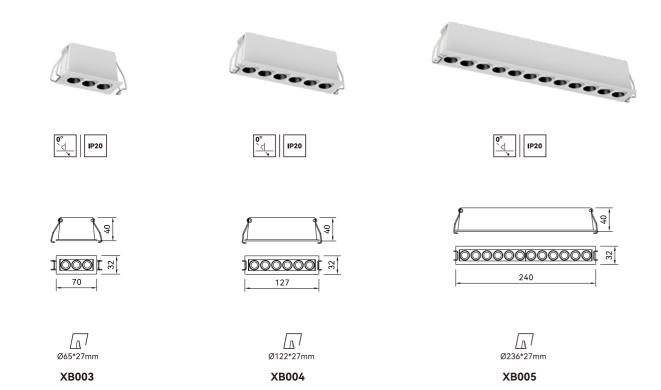

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XB003	MAX 6W	9V	600mA	24°/36°	483 lm	90	20	Embedded
XB004	MAX 10W	18V	500mA	24°/36°	805 lm	90	20	
XB005	MAX 20W	36V		24°/36°	1609lm	90	20	






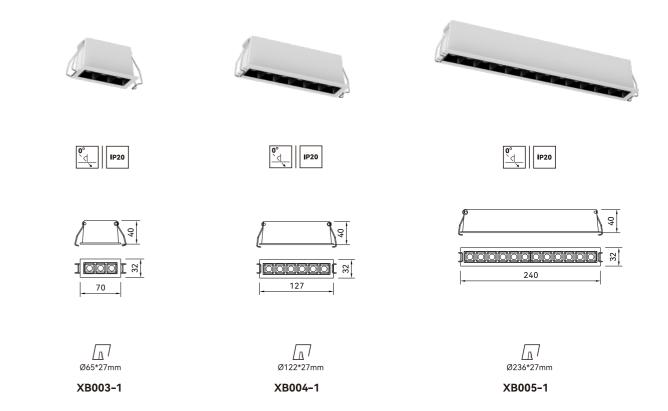

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XB003-1	MAX 6W	9V	600mA	24°/36°	483 lm	90	20	Embedded
XB004-1	MAX 10W	18V	500mA	24°/36°	805 lm	90	20	
XB005-1	MAX 20W	36V		24°/36°	1609lm	90	20	


























Ø243*37mm

XB005N

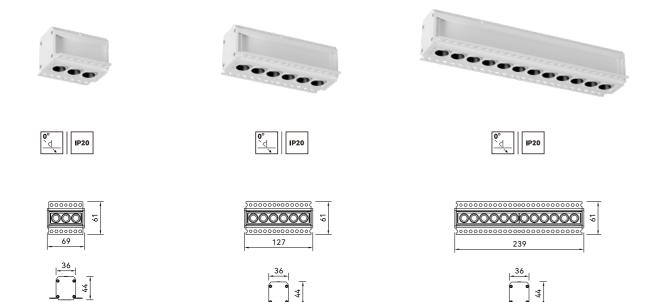

Ø130*37mm

XB004N


Code No	Power	Voltage	Current	Angle	Lumen	CRI	IΡ	Installation
XB003N	MAX 6W	9V	600mA	24°/36°	483 lm	90	20	Embedded
XB004N	MAX 10W	18V	500mA	24°/36°	811 lm	90	20	
XB005N	MAX 20W	36V		24°/36°	1622 lm	90	20	

Chip Brand

Ø71*37mm


XB003N



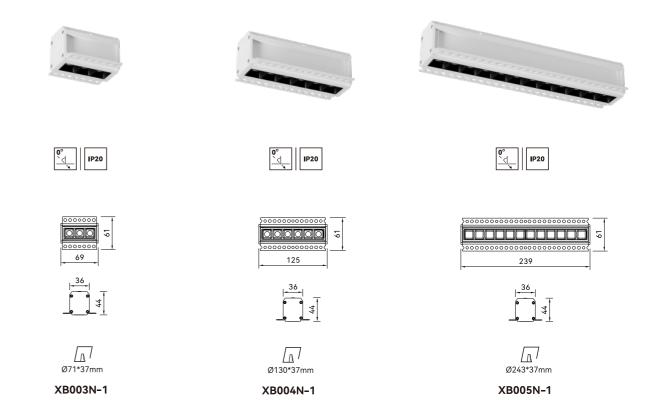

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XB003N-1	MAX 6W	9V	600mA	24°/36°	483 lm	90	20	Embedded
XB004N-1	MAX 10W	18V	500mA	24°/36°	811 lm	90	20	
XB005N-1	MAX 20W	36V	500mA	24°/36°	1622 lm	90	20	

Chip Brand





























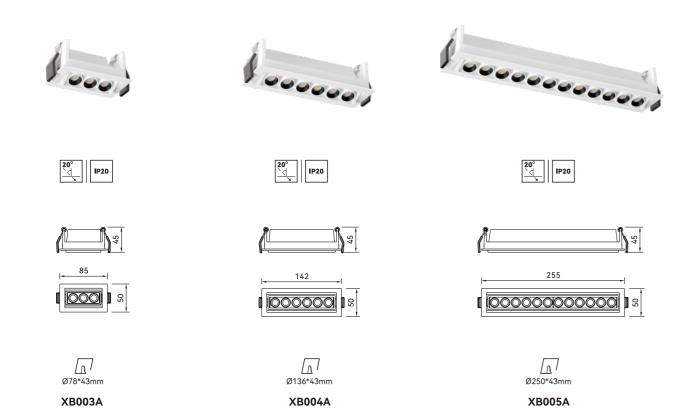

Code No	Power	Voltage	Current	Angle	Lumen	CRI	ΙP	Installation
XB003A	MAX 6W	9V	600mA	24°/36°	483 lm	90	20	Embedded
XB004A	MAX 10W	18V		24°/36°	811 lm	90	20	
XB005A	MAX 20W	36V		24°/36°	1622 lm	90	20	






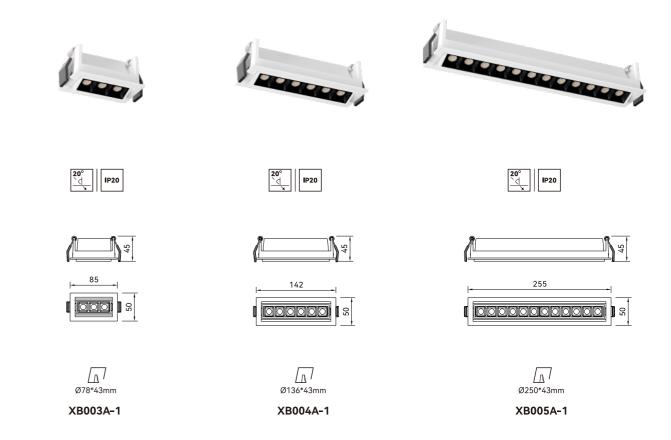


Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XB003A-1	MAX 6W	9V	600mA	24°/36°	483 lm	90	20	Embedded
XB004A-1	MAX 10W	18V	500mA	24°/36°	811 lm	90	20	
XB005A-1	MAX 20W	36V	500mA	24°/36°	1622 lm	90	20	





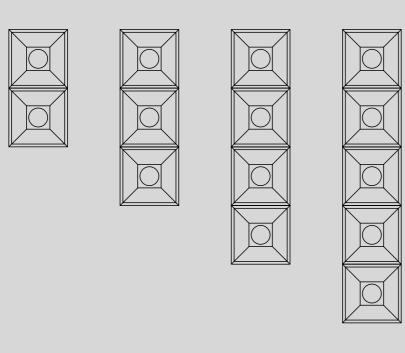

LightLinear grille lamp





XA





































XA001









Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XA001	MAX 2W	3V	700mA	15°/30°/45°	132 lm	90	20	Embedded
XA002	MAX 4W	6V	600mA	15°/30°/45°	278 lm	90	20	
XA005	MAX 10W	15V	600mA	15°/30°/45°	687 lm	90	20	

Chip Brand



XA



























Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XA010	MAX 20W	30V	600mA	15°/30°/45°	1233 lm	90	20	Embedded
XA015	MAX 30W	36V	600mA	15°/30°/45°		90	20	

Chip Brand















15° Narrow

45° Wide


































Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XA001N	MAX 2W	3V	700mA	15°/30°/45°	132 lm	90	20	Embedded
XA002N	MAX 4W	6V	600mA	15°/30°/45°	278 lm	90	20	
XA005N	MAX 10W	15V	600mA	15°/30°/45°	687 lm	90	20	

Chip Brand




2700K13000K13500K14000K15000K





0° | IP20


















Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XA010N	MAX 20W	30V	600mA	15°/30°/45°	1233 lm	90	20	Embedded
XA015N	MAX 30W	36V	600mA	15°/30°/45°	1913 lm	90	20	

Chip Brand


















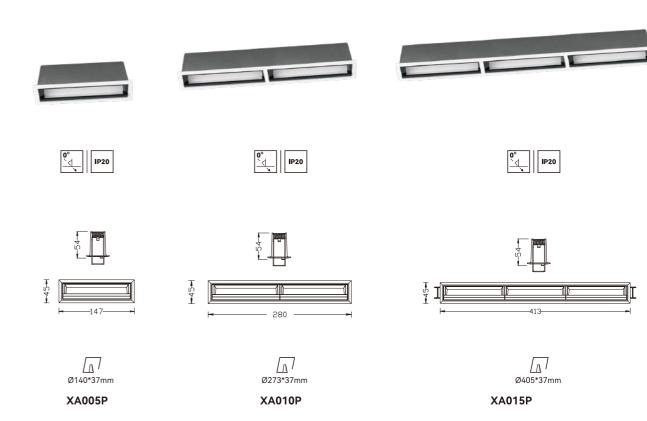

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XA005P	MAX 10W	15V	600mA	Polarized	655 lm	90	20	Embedded
XA010P	MAX 20W	30V	700mA	Polarized	1305 lm	90	20	
XA015P	MAX 30W	36-50V	600mA	Polarized	1968 lm	90	20	

Wall washing Lighting



TRACK LIGHT


























355° | 90° | IP20











TA001

TA002



TA003

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installatio
TA001	MAX 6W	36V	150mA	15°/24°/36°/50°	483 lm	90	20	Track Mounte
TA002	MAX 15W	36V	350mA	10°/15°/24°/36°/50°	1218 lm	90	20	
TA003	MAX 25W	36V	600mA	10°/15°/24°/36°/50°	2037 lm	90	20	

Optical accessories















0-10V





High-power LEDSDCM<3































TH001







TH001Q

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installatio
TH001	MAX 15W	36V	350mA	15°/24°/36°/60°	1207 lm	90	20	Track Mounte
TH001Q	MAX 15W	36V	350mA	15°/24°/36°/60°	1207 lm	90	20	Embedded







Chip Brand





















RoHS

PROFILE LIGHT

ent 腾讯


WELCOME TO CONTACT US FOR LIGHTING DESIGNS







CUSTOMIZATION


Preconfigured Shapes for Pendant or Ceiling

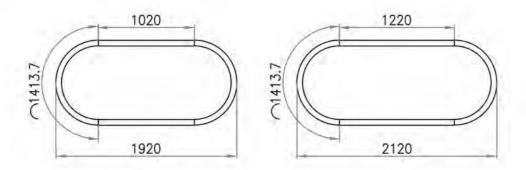


1550 650

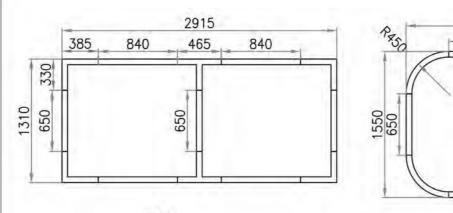

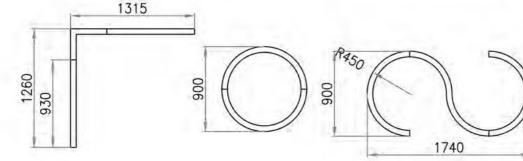

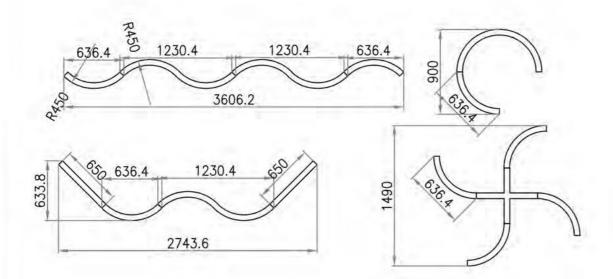

STRAIGHTS & MITERED CORNERS







SQUARE


RECTANGLE

EQUNATERAL TRIANGLE

PENTAGON









90° ANGLE

SOFT CORNERS









SOFT PENTAGON

SOFT SQUARE

SOFT RECTANGLE

EQUILATERAL SOFTTRIANGLE

SOFT HEXAGON







90° SOFT ANGLE

CURVES, SOUIGGLES, & ELLIPSES









90° ARC (OUARTERCIRCLE)







180° DOUBLE ARC RIGHT 180° DOUBLE ARC LEFT

180° TRIPLE ARC

RACETRACK

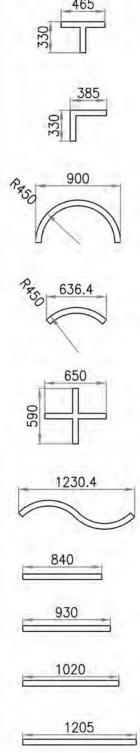

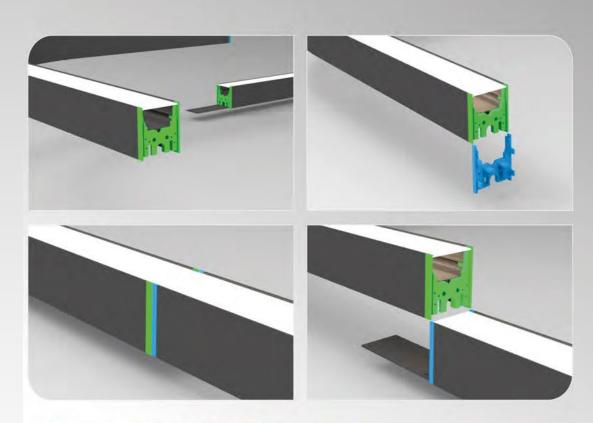



Abandon Poor Quality Connectors Use Canco Smart Connection System

- No Light Leak, Solve The Biggest Problem
- No Need Rotate, Easy To Install
- Less Wire Connect, Simple To Understanding
- Faster Installation, Save Labor Cost

Smart Male & Female Connection System DIAMETER AVAILABLE FROM 1.5-2.0M x Shining Limited



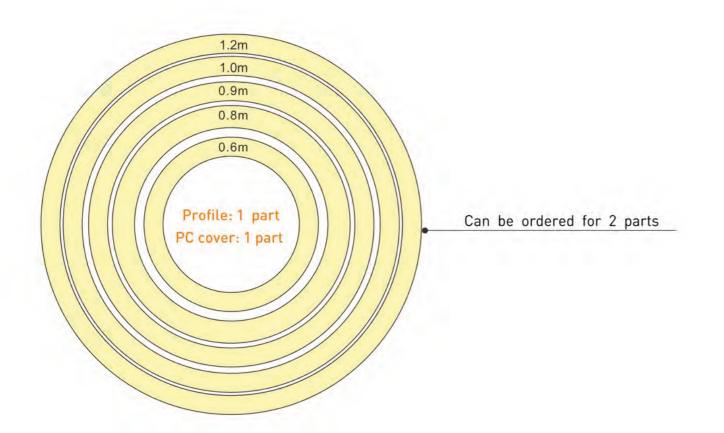

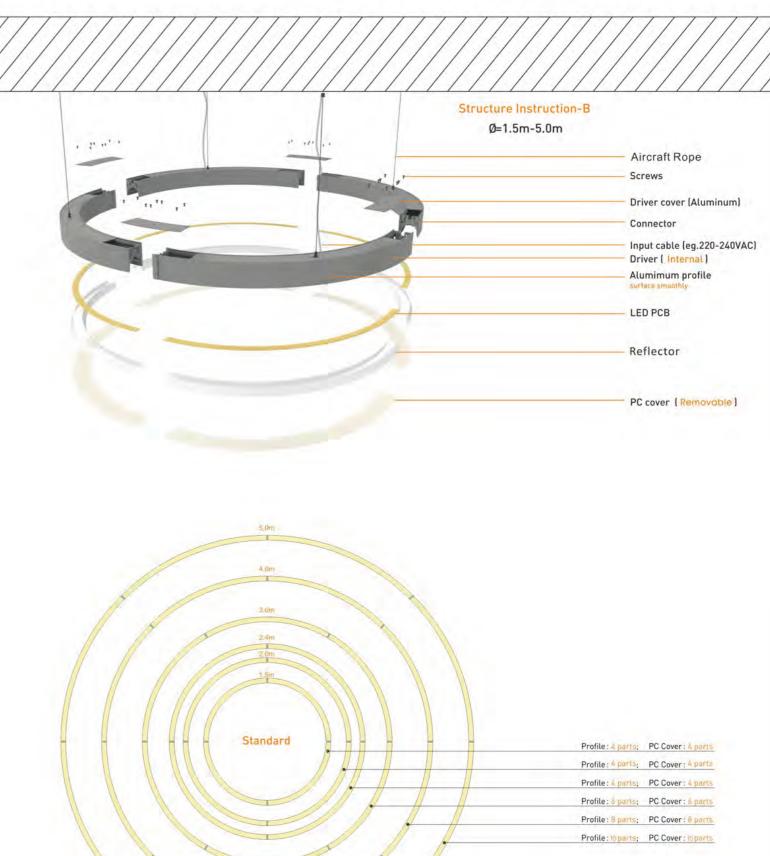

HALO Series CC6068 (Direct Light)



FEATURES

- 1. Patent Design Connection System, NO Light Leak, Easy For Installation
- 2. High Luminous Flux, reach 100lm/W
- 3. UGR < 19, Microprismatic Diffuser, Light Output Soft, Health for Eye
- 4. Support 0-10V, Triac, DALI and Casambi Dimming
- 5. Support Customize Curved Linear Shapes For Different Projects
- 6. Precise Bend Tech, the diameter tolerance ±1.0mm
- 7. Support Customized RAL/Pantone Finish Color

UGR < 19































Code	Power	Input Voltage	CRI	CCT	System Output	Finish
CC6068-600mm	38W	100-240V	80	3000K	3572lm	Black/White/Customized
				4000K	3610lm	Black/White/Customized
				6000K	3648lm	Black/White/Customized
CC6068-900mm	55W	100-240V	80	3000K	5170lm	Black/White/Customized
				4000K	5225lm	Black/White/Customized
				6000K	5280lm	Black/White/Customized
CC6068-1200mm	75W	100-240V	80	3000K	7050lm	Black/White/Customized
				4000K	7125lm	Black/White/Customized
	azzana (2012)			6000K	7200lm	Black/White/Customized
CC6068-1500mm	94W	100-240V	80	3000K	8836lm	Black/White/Customized
				4000K	8930lm	Black/White/Customized
*************************************	************************	HOTONICIO FORDO HOTONIA (FILLE)		6000K	9024lm	Black/White/Customized
CC6068-1800mm	113W	100-240V	80	3000K	10622lm	Black/White/Customized
				4000K	10735lm	Black/White/Customized
				6000K	10848lm	Black/White/Customized
CC6068-2400mm	151W	100-240V	80	3000K	14194lm	Black/White/Customized
				4000K	14345lm	Black/White/Customized
				6000K	14496lm	Black/White/Customized

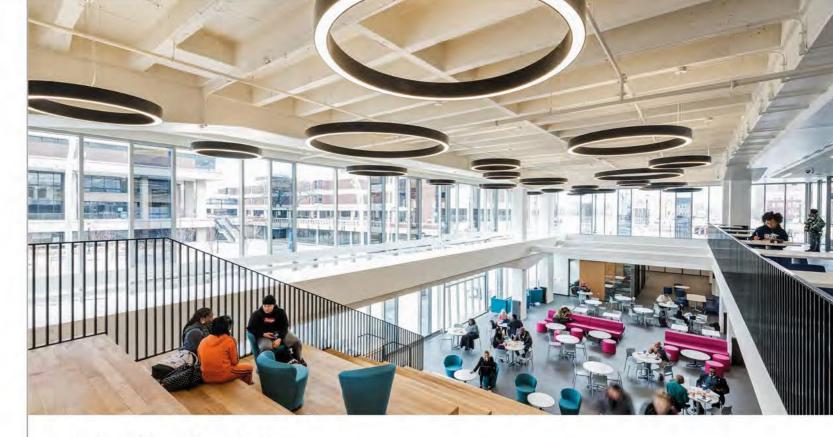


Cross Section Size & Details








Luminous Intensity Distribution Curve




The Average Iluminance Effective Figure



Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

HALO Square Series CF6068 (Direct Light)

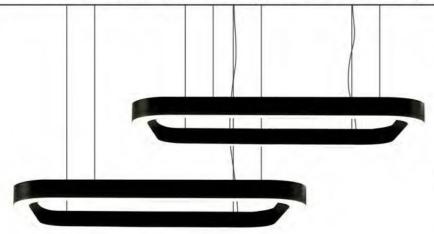

FEATURES

- 1. Patent Design Connection System, NO Light Leak, Easy For Installation
- 2. High Luminous Flux, reach 100lm/W
- 3. UGR < 19, Microprismatic Diffuser, Light Output Soft, Health for Eye
- 4. Support 0-10V, Triac, DALI and Casambi Dimming
- 5. Support Customize Curved Linear Shapes For Different Projects
- 6. Precise Bend Tech, the diameter tolerance ±1.0mm
- 7. Support Customized RAL/Pantone Finish Color

UGR < 19



































Code	Power	Input Voltage	CRI	CCT	System Output	Finish
CF6068-600*600mm	38W	100-240V	80	3000K	4512lm	Black/White/Customized
				4000K	4560lm	Black/White/Customized
				6000K	4608lm	Black/White/Customized
CF6068-600*1000mm	55W	100-240V	80	3000K	6016lm	Black/White/Customized
				4000K	6080lm	Black/White/Customized
				6000K	6144lm	Black/White/Customized
CF6068-1000*1000mm	75W	100-240V	80	3000K	7520lm	Black/White/Customized
				4000K	7600lm	Black/White/Customized
	*****************		************	6000K	7680lm	Black/White/Customized
CF6068-600*1200mm	94W	100-240V	80	3000K	6768lm	Black/White/Customized
				4000K	6840lm	Black/White/Customized
	annon partentin		.,	6000K	6912lm	Black/White/Customized
CF6068-1200*1200mm	113W	100-240V	80	3000K	9024lm	Black/White/Customized
				4000K	9120lm	Black/White/Customized
				6000K	9216lm	Black/White/Customized
CF6068-1200*2400mm	151W	100-240V	80	3000K	13536lm	Black/White/Customized
				4000K	13680lm	Black/White/Customized
				6000K	13824lm	Black/White/Customized



Luminous Intensity Distribution Curve




The Average Iluminance Effective Figure



Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

HALO Square Series CE6068 (Direct Light)



FEATURES

- Patent Design Connection System, NO Light Leak, Easy For Installation
- 2. High Luminous Flux, reach 100lm/W
- 3. UGR < 19, Microprismatic Diffuser, Light Output Soft, Health for Eye
- 4. Support 0-10V, Triac, DALI and Casambi Dimming
- 5. Support Customize Curved Linear Shapes For Different Projects
- 6. Precise Bend Tech, the diameter tolerance ±1.0mm
- 7. Support Customized RAL/Pantone Finish Color

UGR < 19































Code	Power	Input Voltage	CRI	CCT	System Output	Finish
CE6068-1200*600mm	60W	100-240V	80	3000K	5640lm	Black/White/Customized
				4000K	5700lm	Black/White/Customized
				6000K	5760lm	Black/White/Customized
CE6068-1800*600mm	86W	100-240V	80	3000K	8084lm	Black/White/Customized
				4000K	8170lm	Black/White/Customized
				6000K	8256lm	Black/White/Customized
CE6068-2400*600mm	110W	100-240V	80	3000K	10340lm	Black/White/Customized
				4000K	10450lm	Black/White/Customized
	*************			6000K	10560lm	Black/White/Customized
CE6068-2400*1200mm	124W	100-240V	80	3000K	11656lm	Black/White/Customized
				4000K	11780lm	Black/White/Customized
,			***********	6000K	11904lm	Black/White/Customized
CE6068-3600*1200mm	172W	100-240V	80	3000K	16168lm	Black/White/Customized
				4000K	16340lm	Black/White/Customized
				6000K	16512lm	Black/White/Customized
CE6068-4800*1200mm	220W	100-240V	80	3000K	20680lm	Black/White/Customized
				4000K	20900lm	Black/White/Customized
				6000K	21120lm	Black/White/Customized

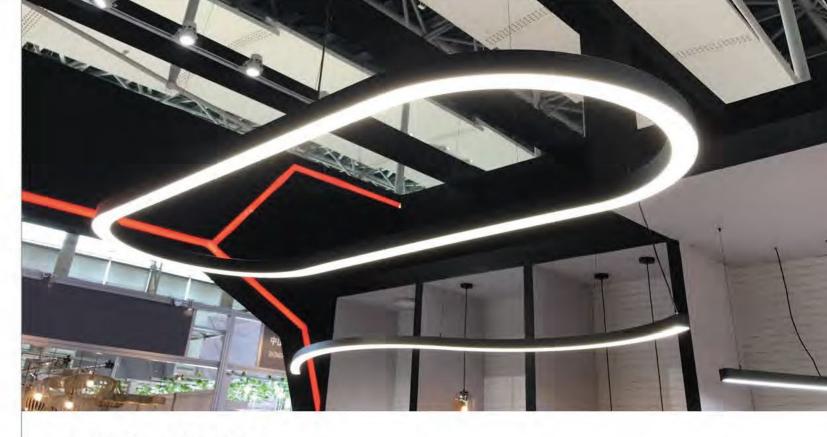

Cross Section Size & Details











Luminous Intensity Distribution Curve




The Average Iluminance Effective Figure



Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

HALO Rectangle Series CX6068 (Direct Light)

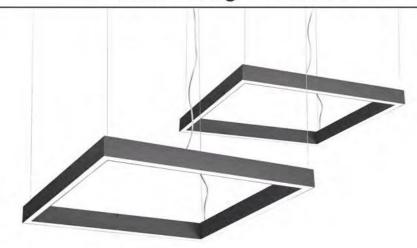

FEATURES

- 1. Patent Design Connection System, NO Light Leak, Easy For Installation
- 2. High Luminous Flux, reach 100lm/W
- 3. UGR < 19, Microprismatic Diffuser, Light Output Soft, Health for Eye
- 4. Support 0-10V, Triac, DALI and Casambi Dimming
- 5. Support Customize Curved Linear Shapes For Different Projects
- 6. Precise Bend Tech, the diameter tolerance ±1.0mm
- 7. Support Customized RAL/Pantone Finish Color

UGR < 19































Code	Power	Input Voltage	CRI	CCT	System Output	Finish
CX6068-450*450mm	32W	100-240V	80	3000K	3008lm	Black/White/Customized
				4000K	3040lm	Black/White/Customized
				6000K	3072lm	Black/White/Customized
CX6068-600*600mm	48W	100-240V	80	3000K	4512lm	Black/White/Customized
				4000K	4560lm	Black/White/Customized
				6000K	4608lm	Black/White/Customized
CX6068-900*900mm	72W	100-240V	80	3000K	6768lm	Black/White/Customized
				4000K	6840lm	Black/White/Customized
				6000K	6912lm	Black/White/Customized
CX6068-1200*1200mm	96W	100-240V	80	3000K	9024lm	Black/White/Customized
				4000K	9120lm	Black/White/Customized
				6000K	9216lm	Black/White/Customized
CX6068-450*900mm	54W	100-240V	80	3000K	5076lm	Black/White/Customized
				4000K	5130lm	Black/White/Customized
				6000K	5184lm	Black/White/Customized
CX6068-450*1200mm	66W	100-240V	80	3000K	6204lm	Black/White/Customized
				4000K	6270lm	Black/White/Customized
				6000K	6336lm	Black/White/Customized

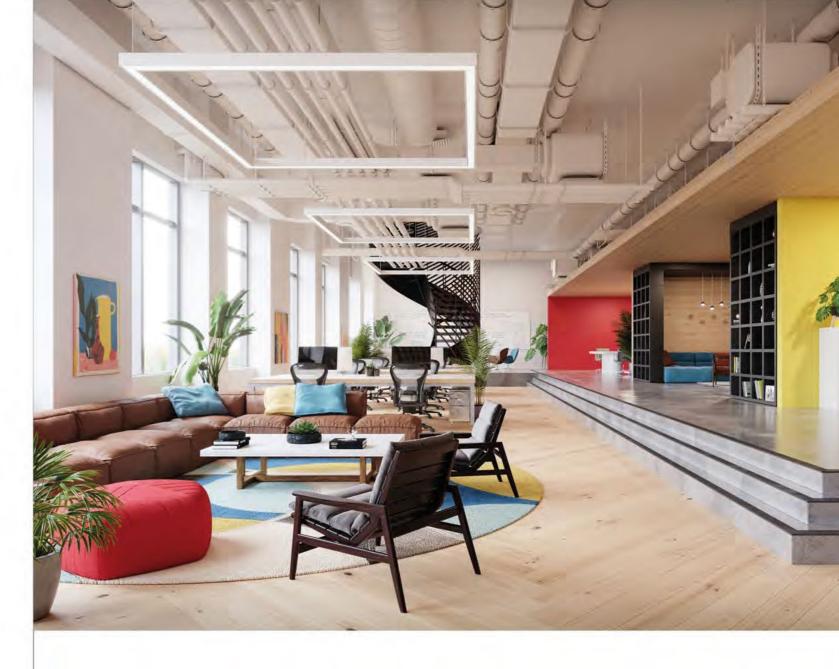


Luminous Intensity Distribution Curve




Average Diffuse Angle(50%): 101.8°

The Average Iluminance Effective Figure



Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

HALO Hexagon Series CH6068 (Direct Light)

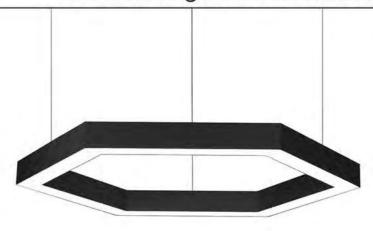

FEATURES

- 1. Patent Design Connection System, NO Light Leak, Easy For Installation
- 2. High Luminous Flux, reach 100lm/W
- 3. UGR < 19, Microprismatic Diffuser, Light Output Soft,
- 4. Support 0-10V, Triac, DALI and Casambi Dimming
- 5. Support Customize Curved Linear Shapes For Different Projects
- 6. Precise Bend Tech, the diameter tolerance ±1.0mm
- 7. Support Customized RAL/Pantone Finish Color

UGR < 19





























Code	Power	Input Voltage	CRI	CCT	System Output	Finish
CH6068-286mm	34W	100-240V	80	3000K	3196lm	Black/White/Customized
				4000K	3230lm	Black/White/Customized
				6000K	3264lm	Black/White/Customized
CH6068-386mm	46W	100-240V	80	3000K	4324lm	Black/White/Customized
				4000K	4370lm	Black/White/Customized
				6000K	4416lm	Black/White/Customized
CH6068-486mm	58W	100-240V	80	3000K	5452lm	Black/White/Customized
				4000K	5510lm	Black/White/Customized
	**********			6000K	5568lm	Black/White/Customized
CH6068-586mm	70W	100-240V	80	3000K	6580lm	Black/White/Customized
				4000K	6650lm	Black/White/Customized
	********************	wysceroscosowy (1914)	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	6000K	6720lm	Black/White/Customized
CH6068-686mm	82W	100-240V	80	3000K	7708lm	Black/White/Customized
				4000K	7790lm	Black/White/Customized
				6000K	7872lm	Black/White/Customized
CH6068-786mm	95W	100-240V	80	3000K	8930lm	Black/White/Customized
				4000K	9025lm	Black/White/Customized
				6000K	9120lm	Black/White/Customized




Cross Section Size & Details








Luminous Intensity Distribution Curve



The Average Iluminance Effective Figure



Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

DASH Series LP4880 (Direct Light)



FEATURES

- 1. Frosted PMMA Diffuser and Microprismatic PMMA Diffuser(UGR < 19) Optional
- 2. Constant Current DC36V output, Support 0-10V, Triac, DALI Dimming
- 3. 45°Connecter System Design, Easy for installation
- 4. Endcap Screwless, Elegant Appearance
- 5. IES File and High-Resolution Photos Available
- 6. 5 Different Light Width For Your Choice
- 7. Support Customized RAL/Pantone Finish Color



UGR < 19






























Code	Power	Input Voltage	CRI	CCT	System Output	Finish
LP4880-570mm	12W	100-240V	80	3000K	1224lm	Black/White/Customized
				4000K	1260lm	Black/White/Customized
				6000K	1284lm	Black/White/Customized
LP4880-850mm	18W	100-240V	80	3000K	1836lm	Black/White/Customized
				4000K	1890lm	Black/White/Customized
				6000K	1926lm	Black/White/Customized
LP4880-1200mm	24W	100-240V	80	3000K	2448lm	Black/White/Customized
				4000K	2520lm	Black/White/Customized
	***************			6000K	2568lm	Black/White/Customized
LP4880-1550mm	32W	100-240V	80	3000K	3264lm	Black/White/Customized
				4000K	3360lm	Black/White/Customized
	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		6000K	3424lm	Black/White/Customized
LP4880-1760mm	36W	100-240V	80	3000K	3672lm	Black/White/Customized
				4000K	3780lm	Black/White/Customized
				6000K	3852lm	Black/White/Customized
LP4880-2390mm	48W	100-240V	80	3000K	4896lm	Black/White/Customized
				4000K	5040lm	Black/White/Customized
				6000K	5136lm	Black/White/Customized
*****************************	****************	******************************	************	*****************	COLOR DE LO COLOR DE LA COLOR	

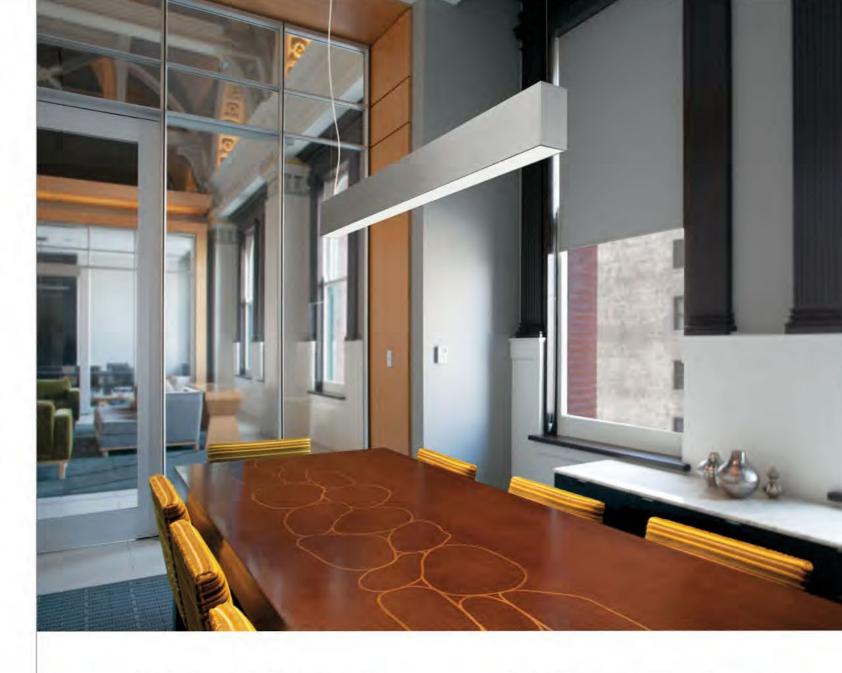

Luminous Intensity Distribution Curve

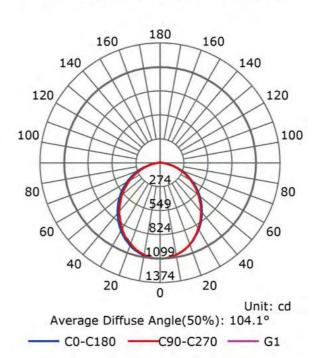

The Average Iluminance Effective Figure



Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.