


M+ Lighting



2025  
CATALOGUE  
ARCHITECTURE LIGHTING

- +852 4436 6626
- info@mxshining.com
- www.mx-shining.com
- mx\_shining.hk

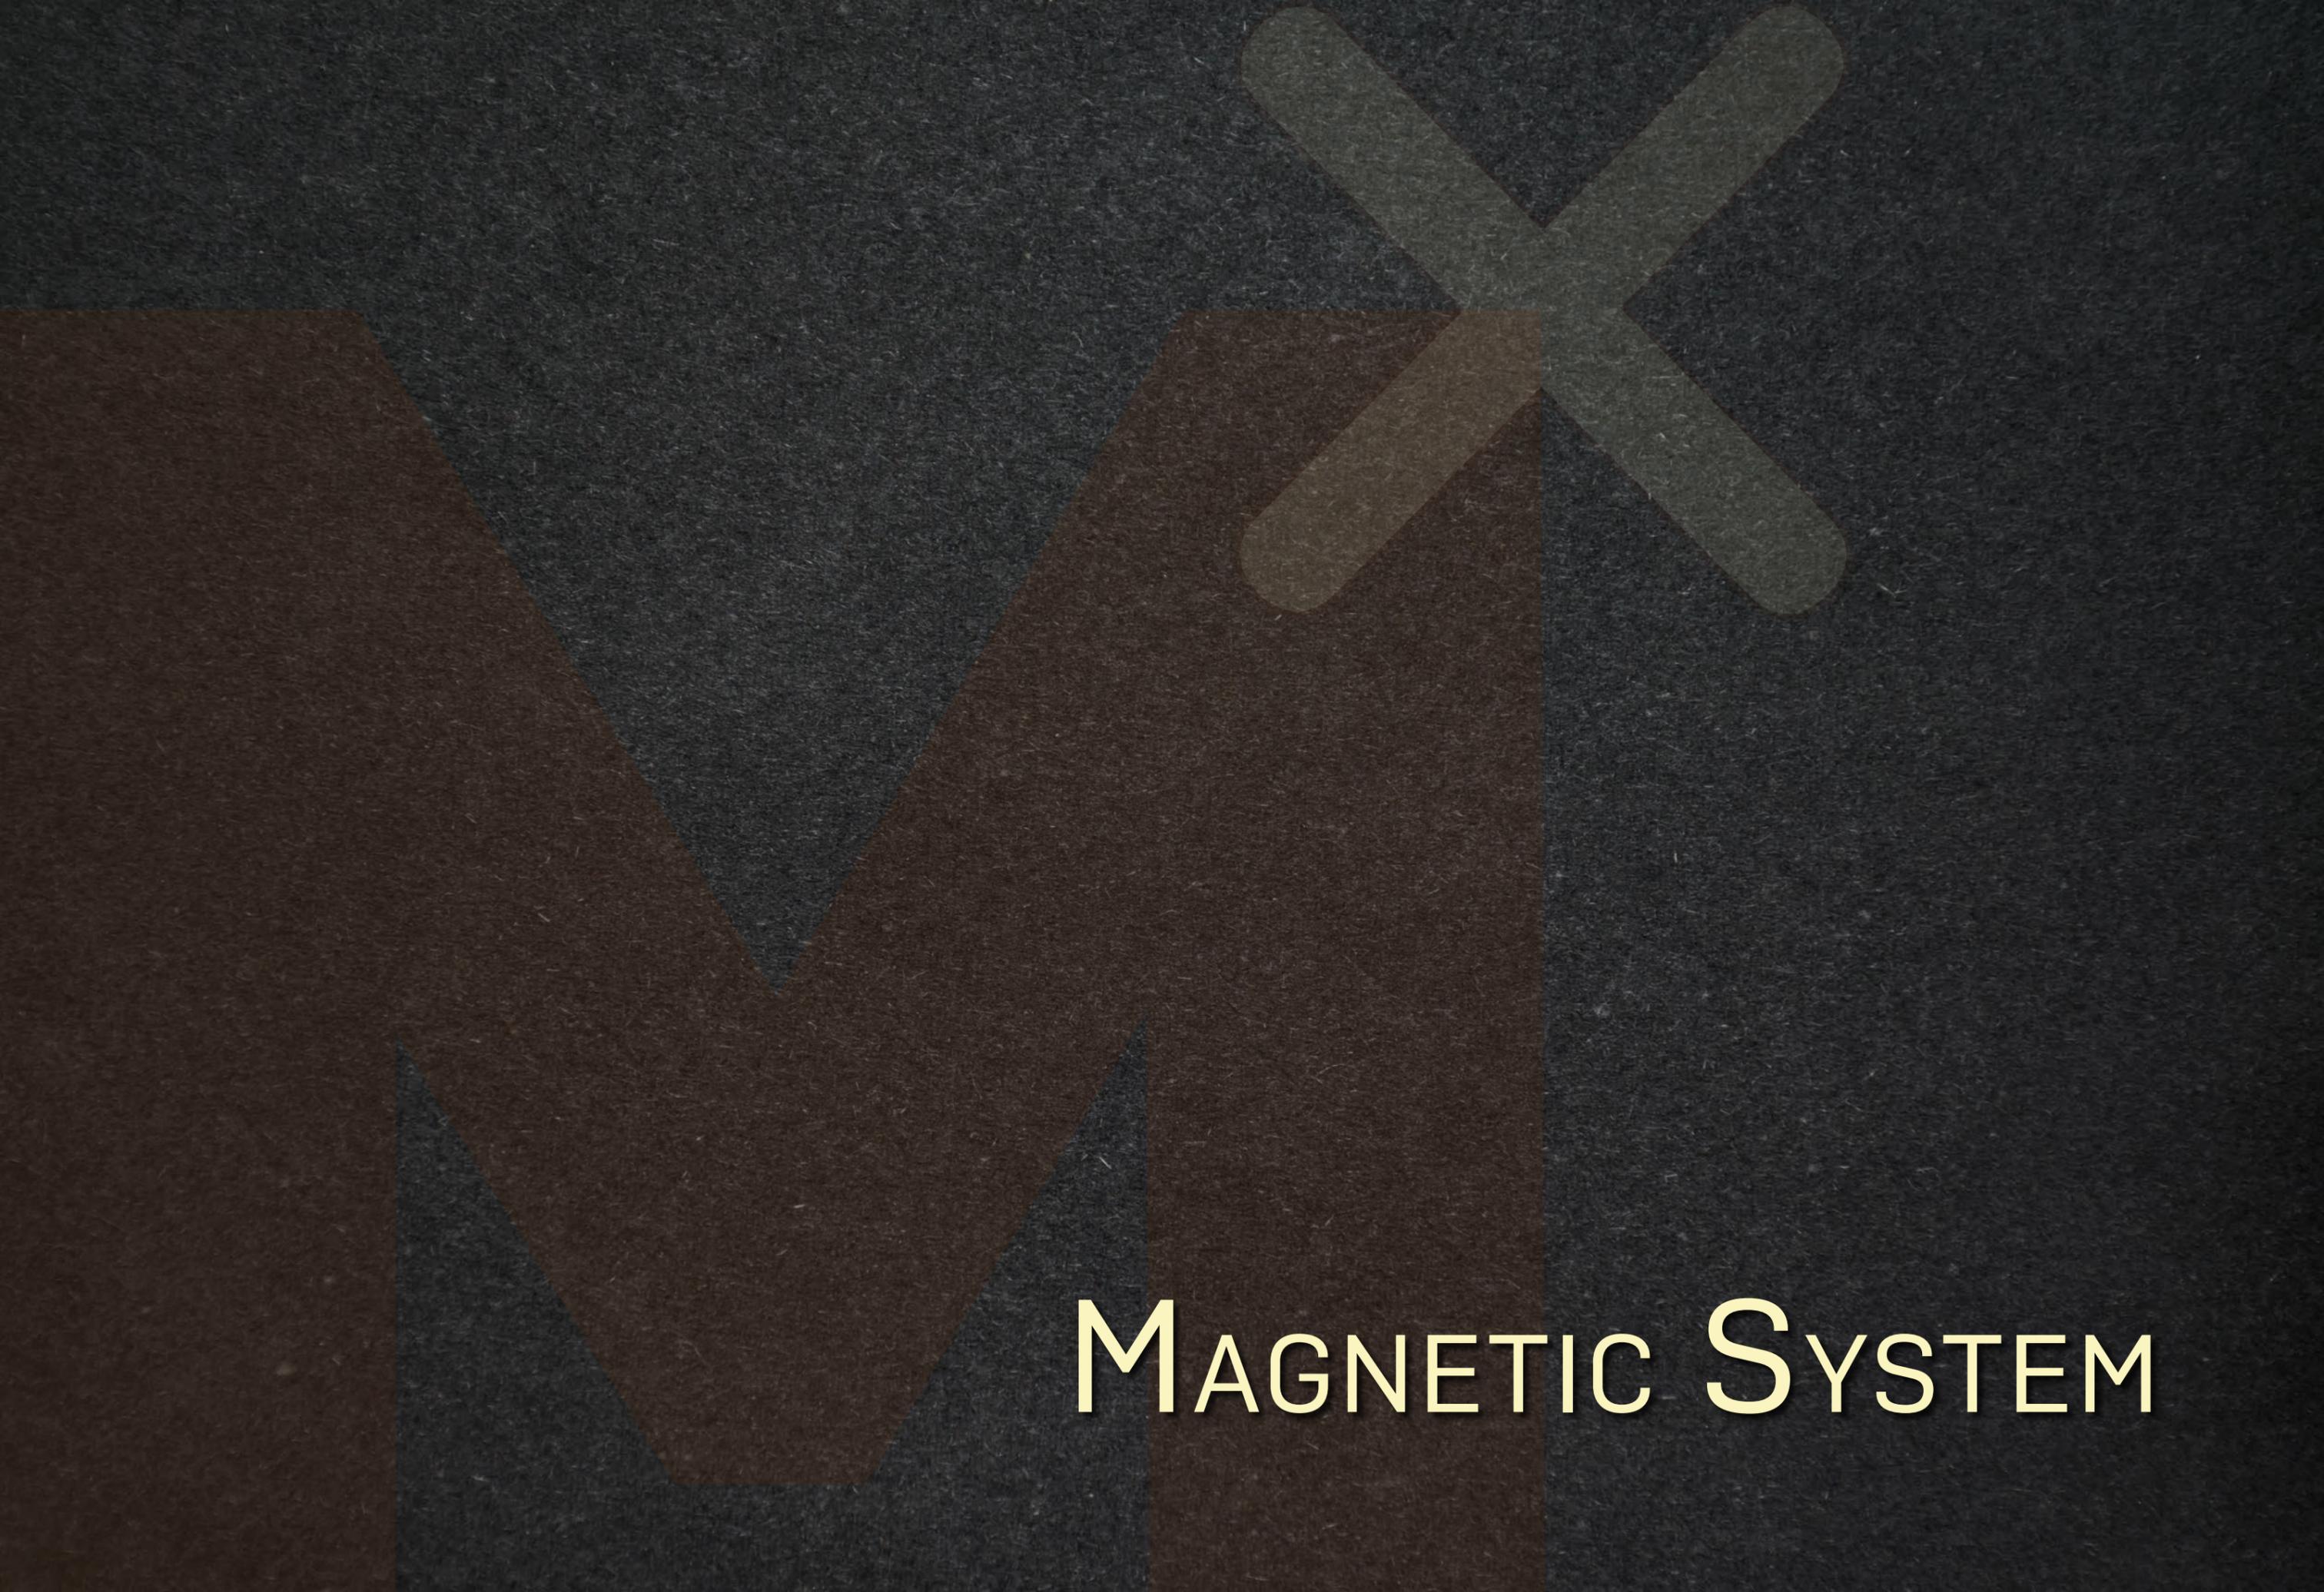

# MAGNETIC SYSTEM

# M203 SERIES

# CATALOGUE



M203-Ultron




M203-Cyclops



M203-Agusta




M203-Agusta



M203-Agusta



M203-Agusta



M203-Agusta



M203-Natasha



M203-Natasha



M203-Ultron-90




M203-Spider



M203-Boling



M203-Marlboro



M203-Pista



M203-Hydra




M203-Cyclops



M203-Yelena



M203-Cyclops



M203-Vision



M203-Neon light



M203-Spot light



M203-Wall washer



M203 Track Rail




M203 Modular




M203 Driver



Easy to insert

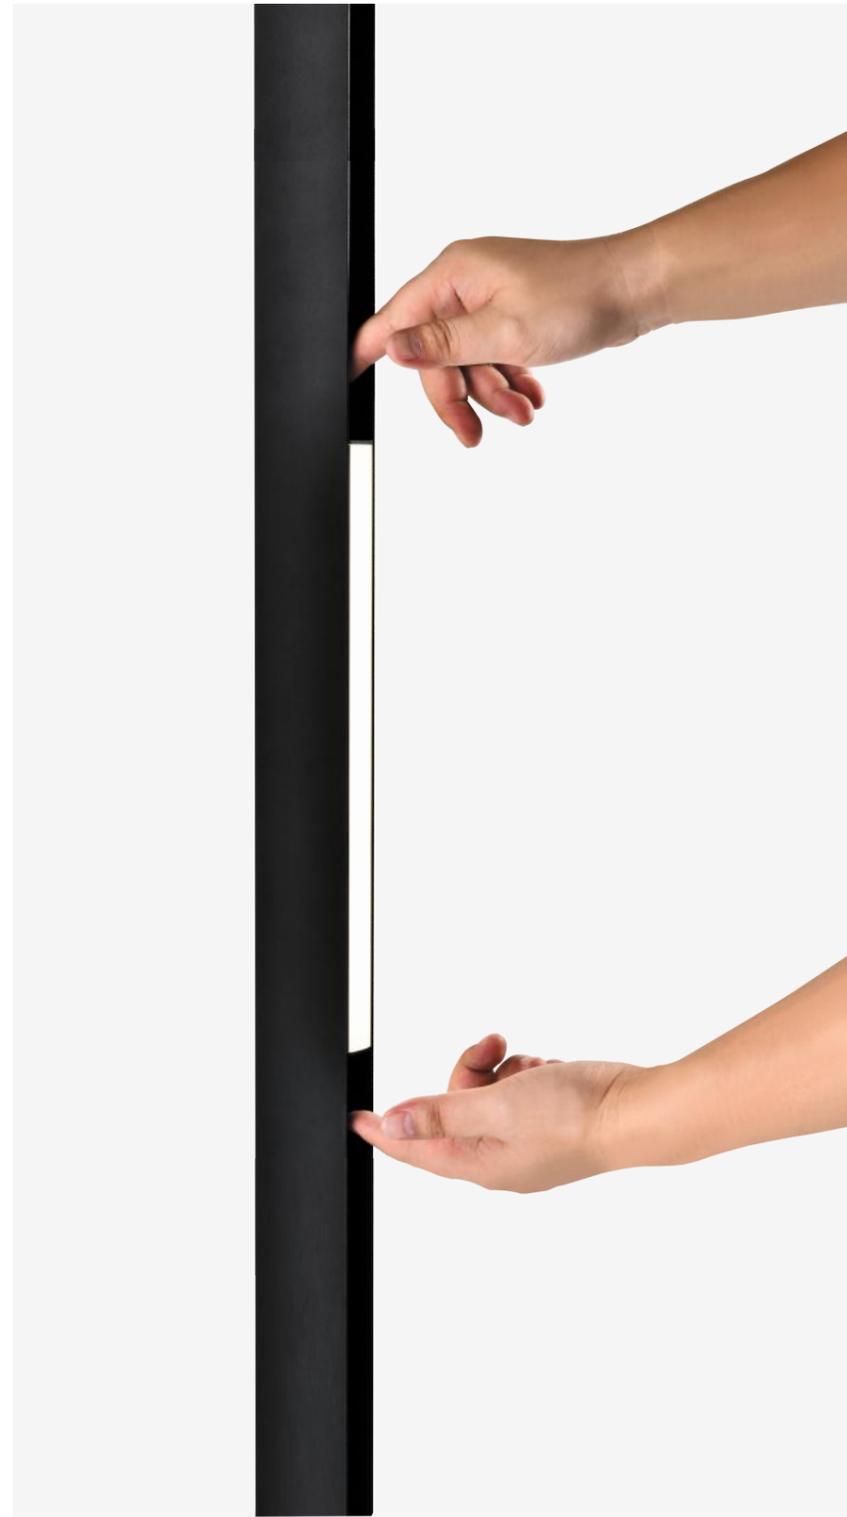

Press and remove from the track

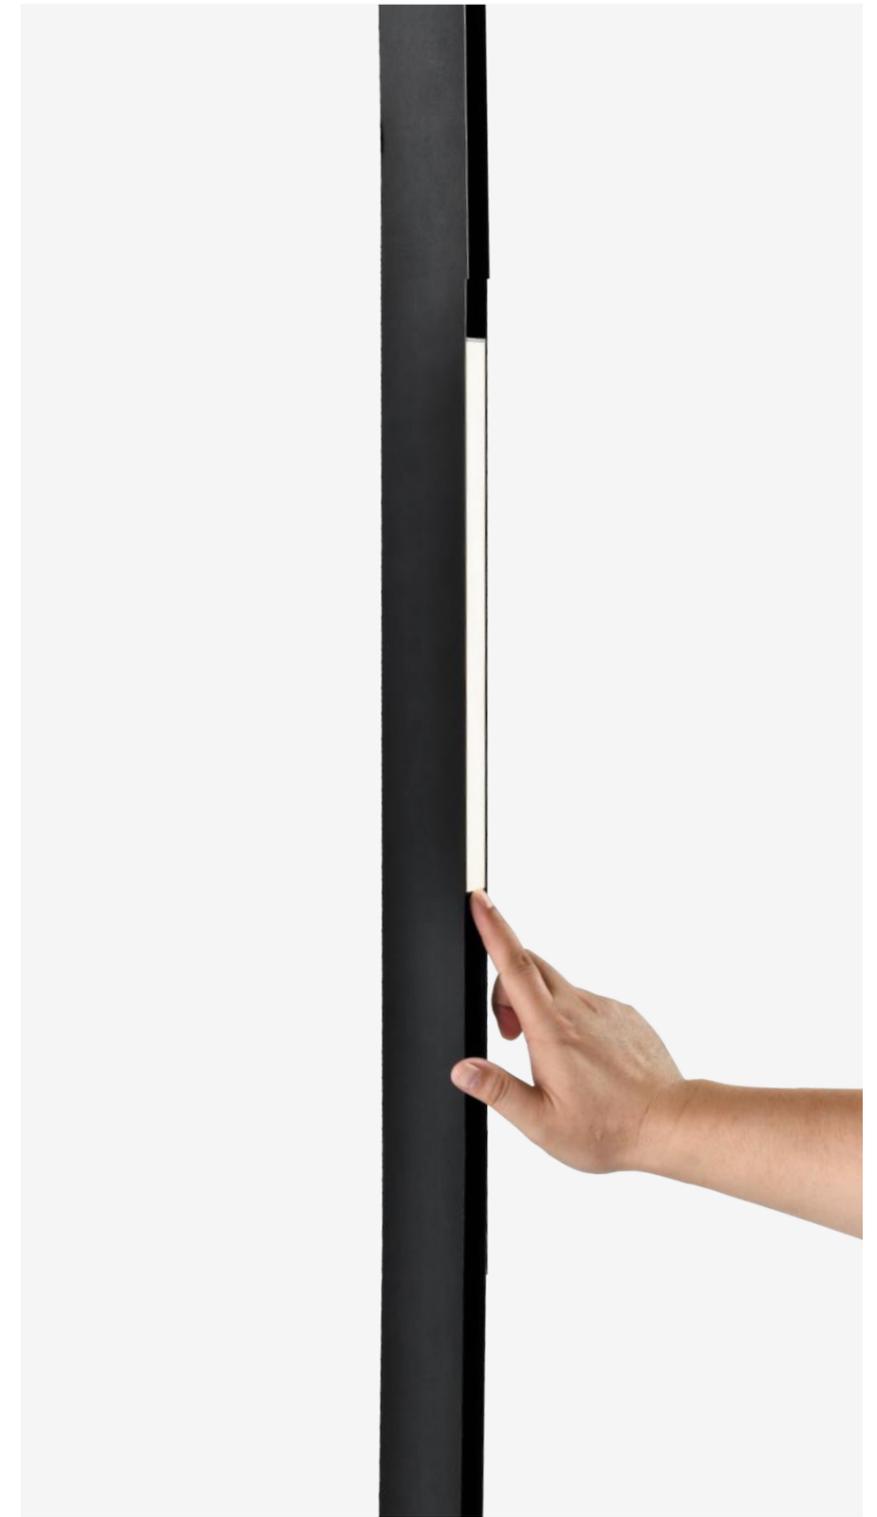

Immediately ready to work

# M203-ULTRON | Floodlight Series


DFS SERIES

## BASIC INFORMATION


<b>PRODUCT CODE</b>	M203-DFS-300	M203-DFS-600	M203-DFS-900	M203-DFS-1200
<b>WATT</b>	10W	20W	30W	40W
<b>LUMEN</b>	700lm	1400lm	2100lm	2800lm
<b>PRODUCT SIZE</b>	L305xW21.6xH42.8	L605xW21.6xH42.8	L905xW21.6xH42.8	L1205xW21.6xH42.8


<b>VOLTAGE</b>	40-48V
<b>CRI</b>	Ra>90
<b>FINISH</b>	● BK ○ WH
<b>CCT</b>	● 3000K / ● 4000K / ● 5000K
<b>SYSTEM OPTIONS</b>	On/off    zigbee    Bluetooth    mija    tuya    TRIO CCT

### DIMENSION (unit: mm)

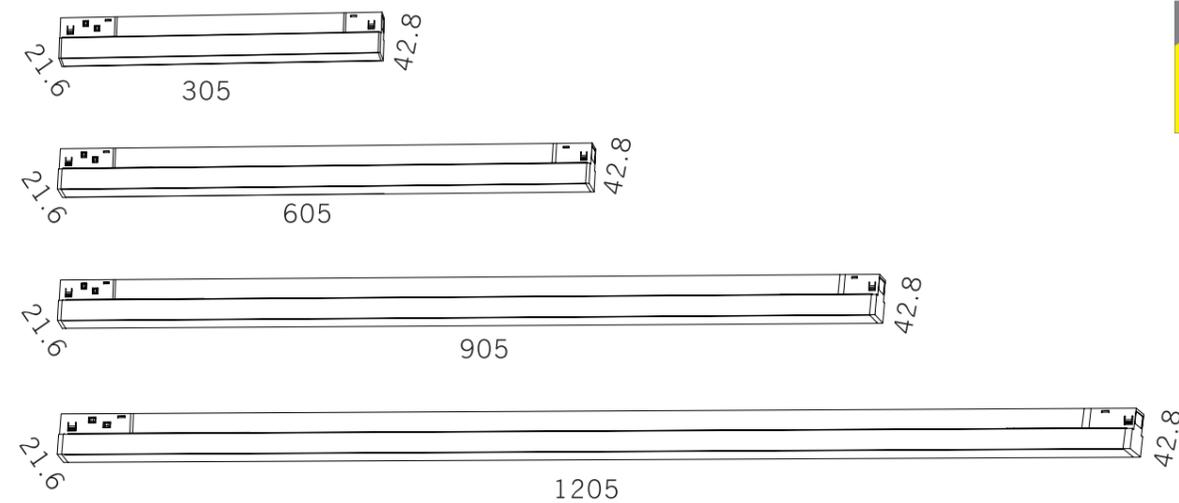

### BEAM ANGLE

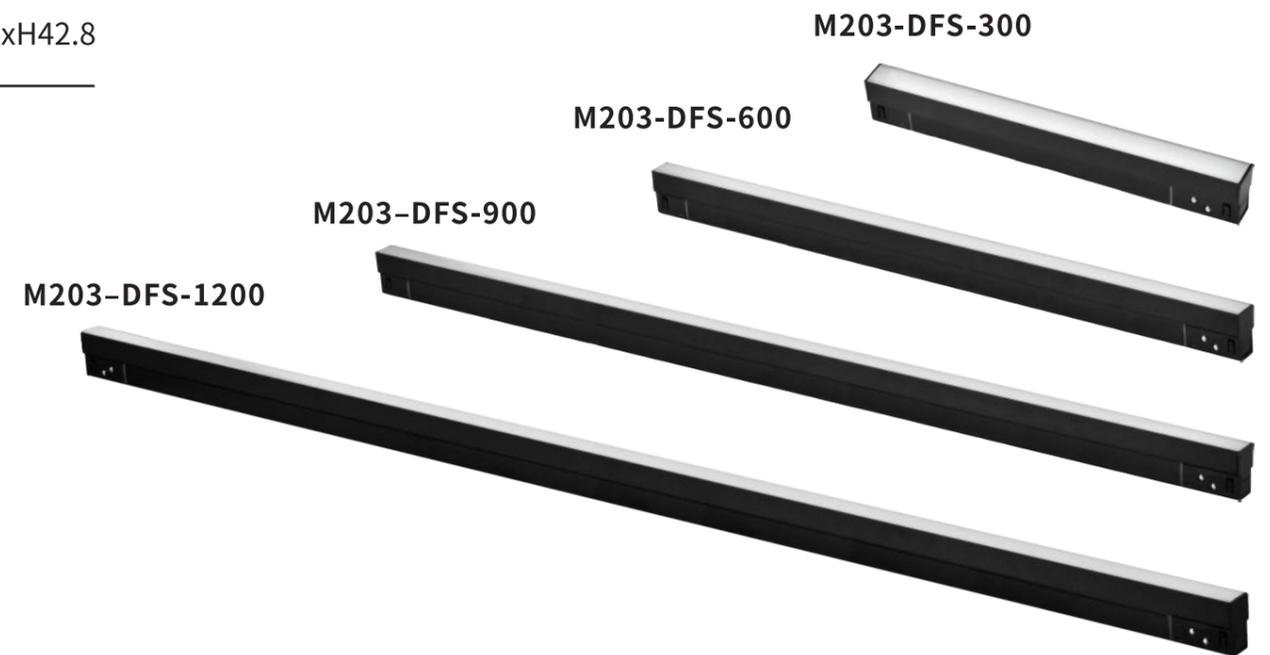

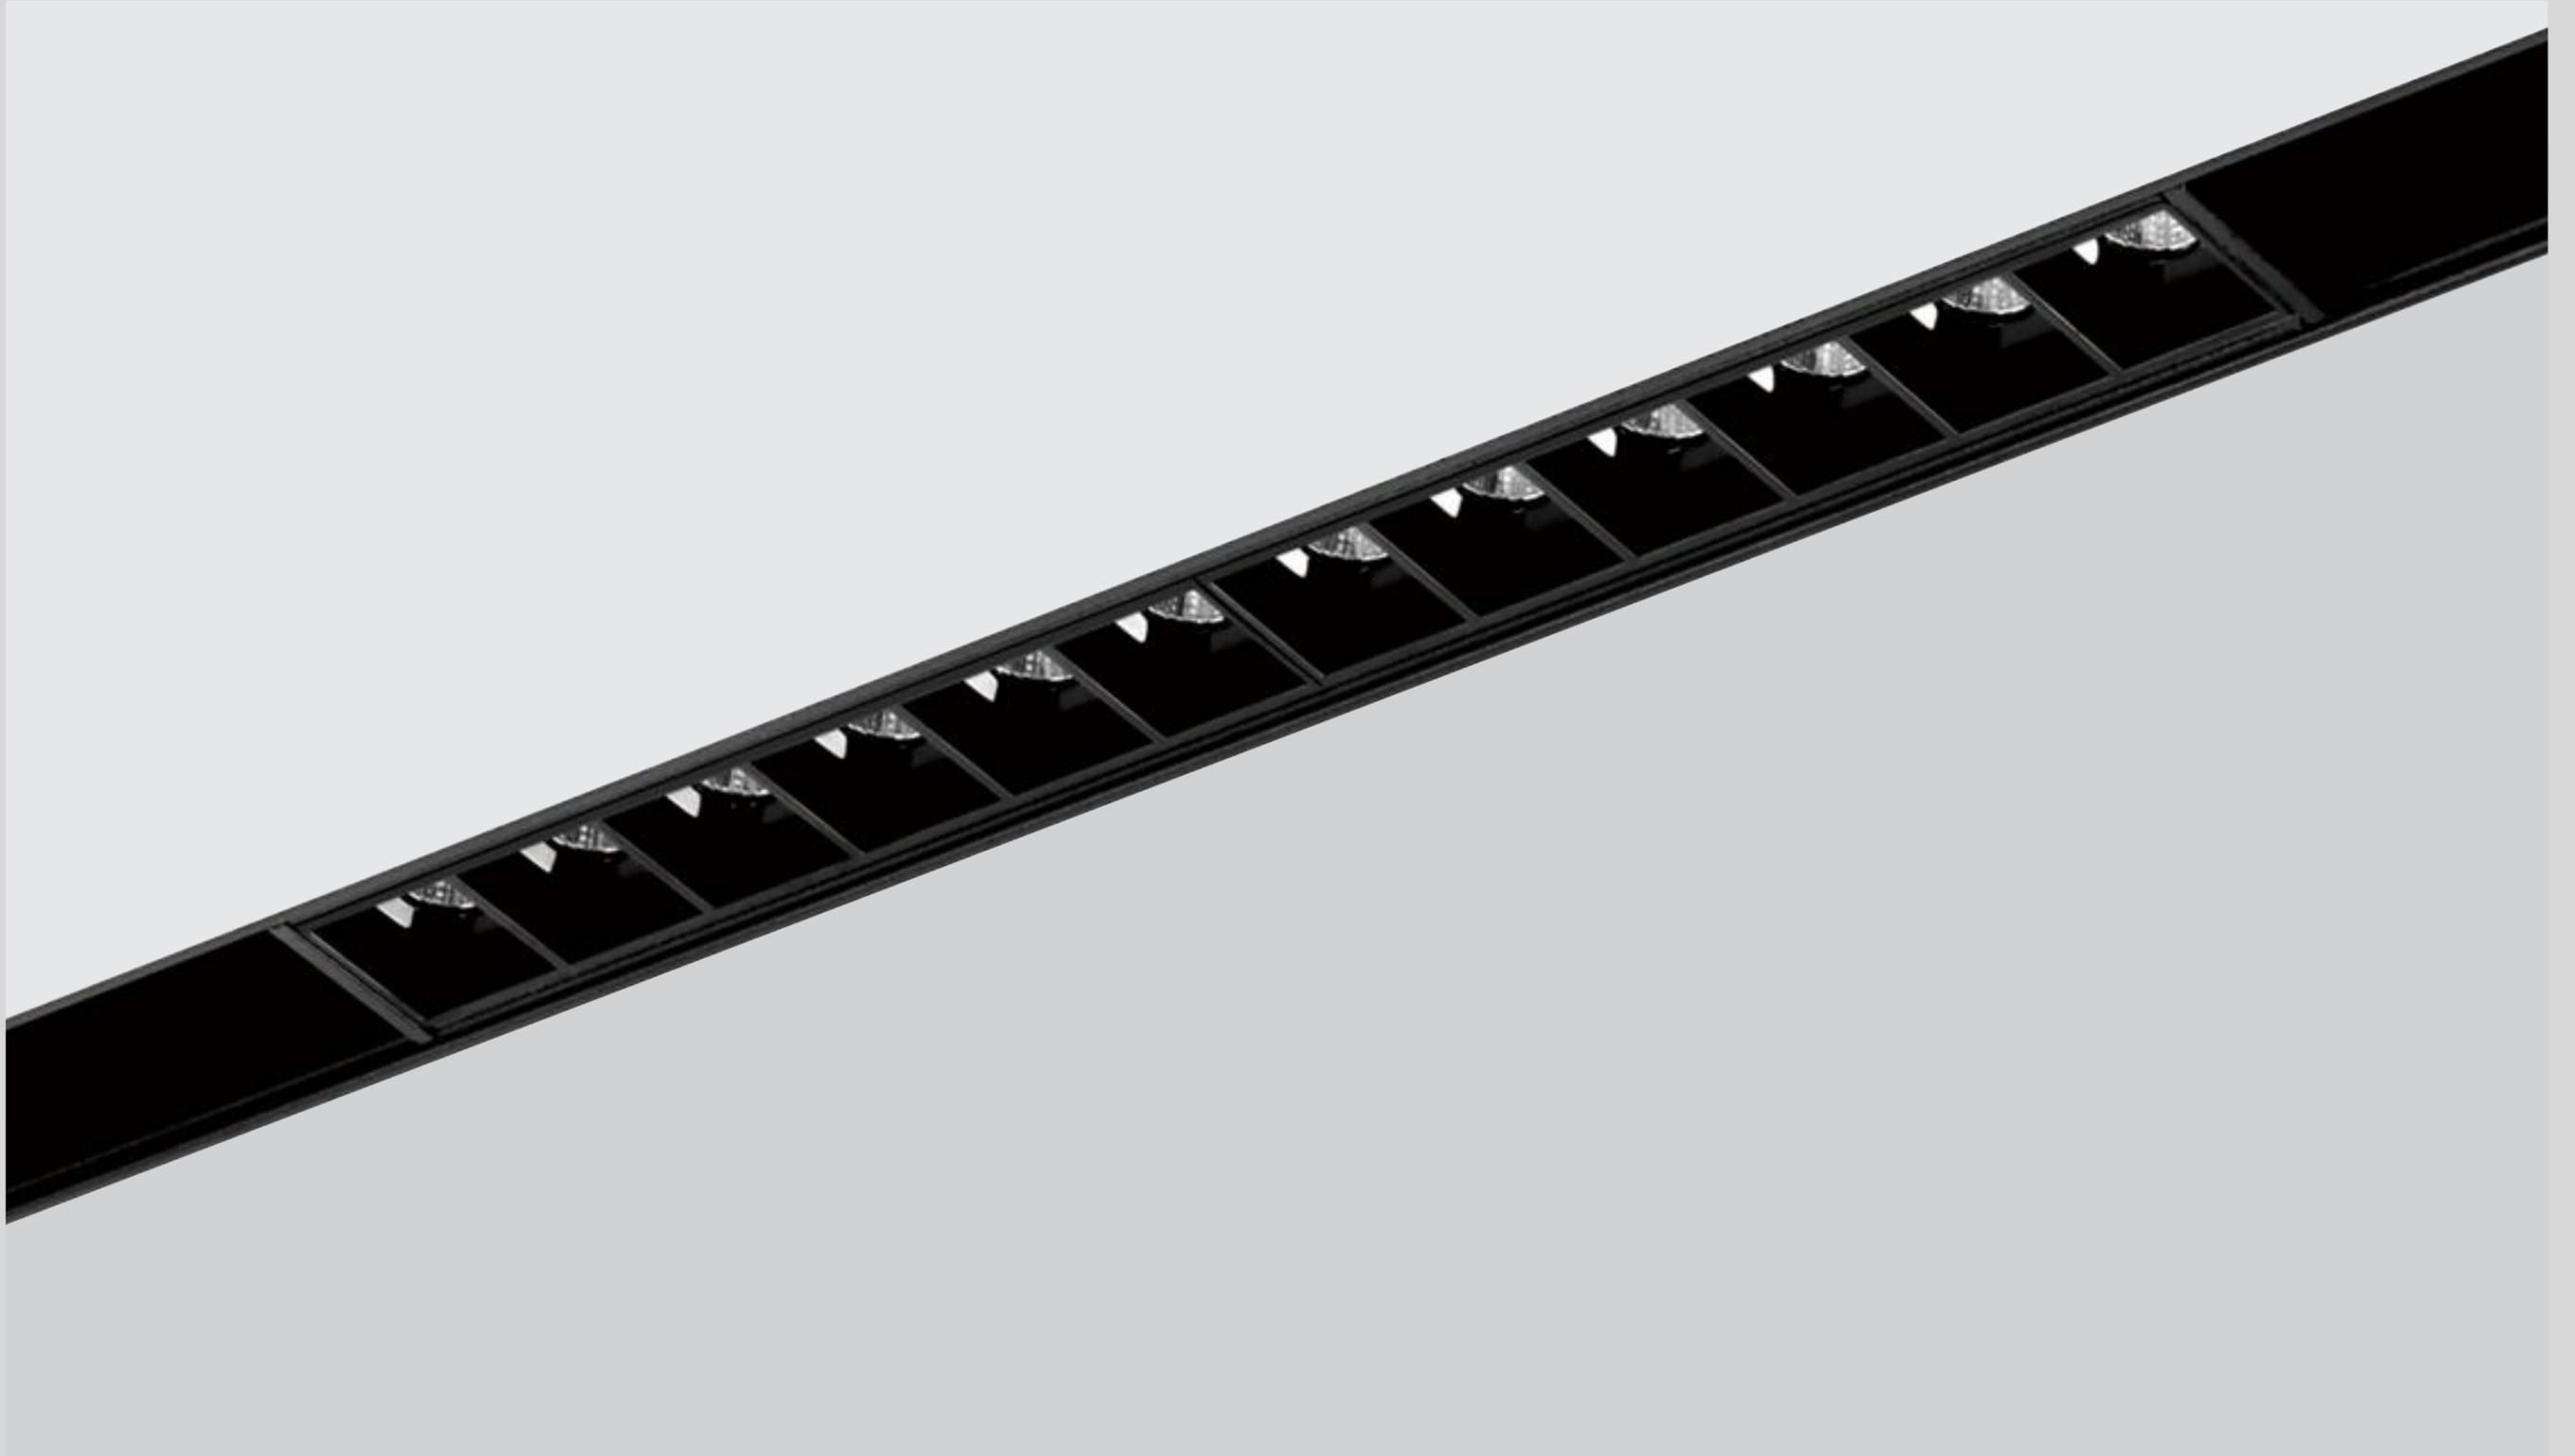

# M203-CYCLOPS | Grille lamp series


LB SERIES

## BASIC INFORMATION



<b>PRODUCT CODE</b>	M203-LB-6W	M203-LB-12W	M203-LB-18W	M203-LB-24W	M203-LB-36W
<b>WATT</b>	6W	12W	18W	24W	36W
<b>LUMEN</b>	500lm	1000lm	1700m	2000lm	3000lm
<b>PRODUCT SIZE</b>	L126.5xW21.6xH42.8	L220xW21.6xH42.8	L328xW21.6xH42.8	L436xW21.6xH42.8	L652xW21.6xH42.8

<b>VOLTAGE</b>	40-48V
<b>CRI</b>	Ra>90
<b>FINISH</b>	● BK ○ WH
<b>CCT</b>	● 3000K / ● 4000K / ● 5000K
<b>SYSTEM OPTIONS</b>	On/off    zigbee    Bluetooth    mijia    tuya    TRIO CCT

### DIMENSION (unit: mm)

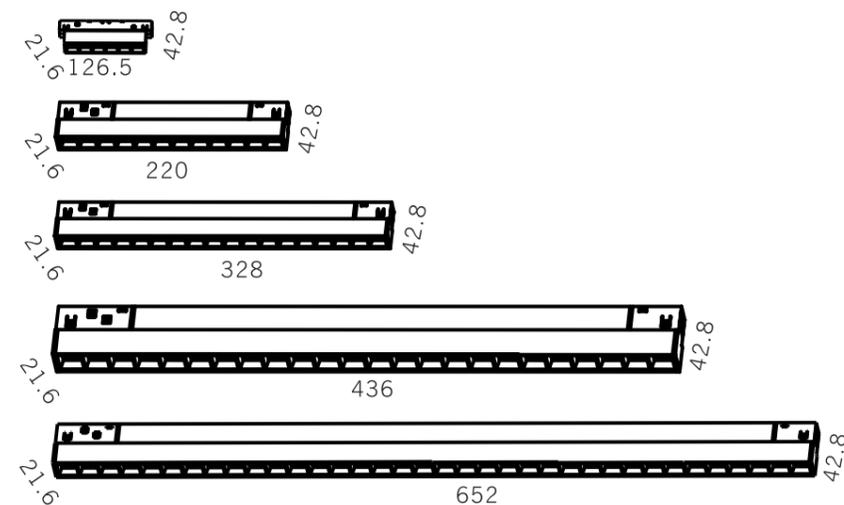

### BEAM ANGLE

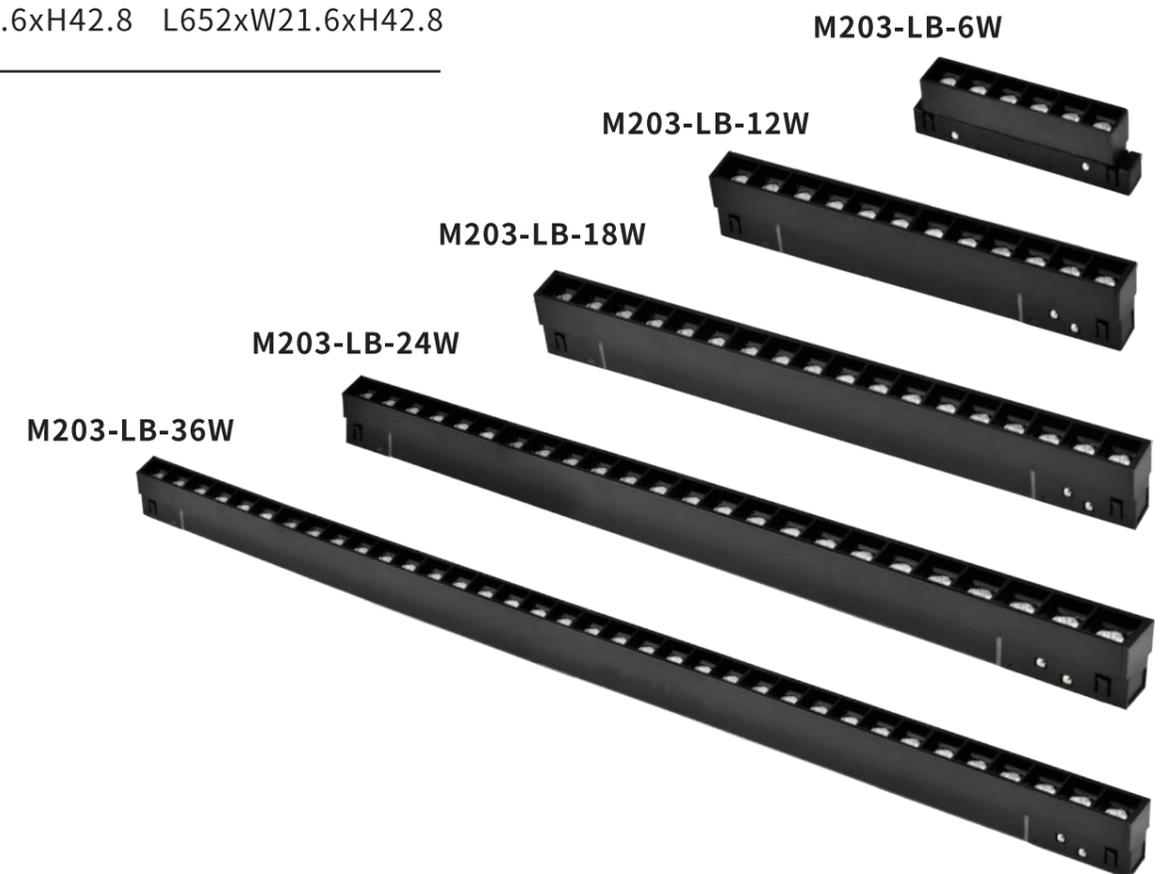



# M203-AGUSTA | Track light series

TL2-B SERIES

## BASIC INFORMATION

PRODUCT CODE	M203-TL2-B-3W	M203-TL2-B-5W
WATT	3W	5W
LUMEN	170lm	200lm
PRODUCT SIZE	L135xØ29.5xH110	L135xØ30xW187

VOLTAGE 40-48V


CRI Ra>90

FINISH ● BK ○ WH ● BR


CCT ● 3000K / ● 4000K / ● 5000K

SYSTEM OPTIONS On/off |  |  |  |  |  TRIO CCT

## DIMENSION (unit: mm)

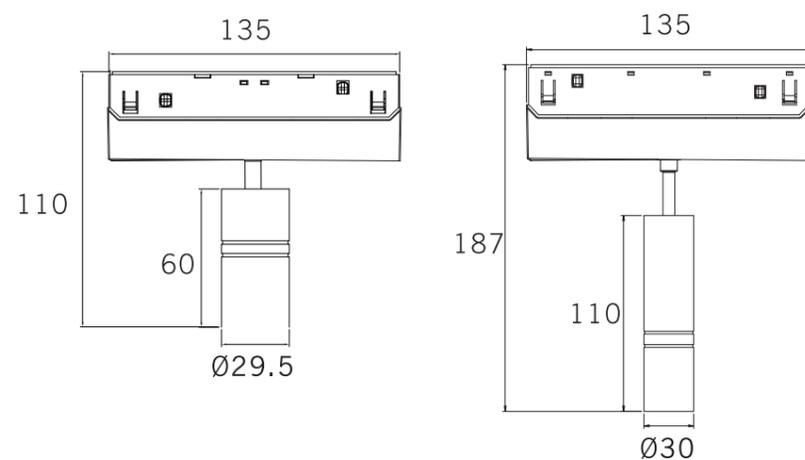

## BEAM ANGLE



M203-TL2-B-3W



M203-TL2-B-5W


# M203-AGUSTA | Track light series

TL2 SERIES


## BASIC INFORMATION

<b>PRODUCT CODE</b>	M203-TL2-7W	M203-TL2-12W
<b>WATT</b>	7W	12W
<b>LUMEN</b>	700lm	960lm
<b>PRODUCT SIZE</b>	135xØ45x169	135xØ45x208
<b>VOLTAGE</b>	40-48V	
<b>CRI</b>	Ra>90	
<b>FINISH</b>	● BK ○ WH ● BR	
<b>CCT</b>	● 3000K / ● 4000K / ● 5000K	
<b>SYSTEM OPTIONS</b>	On/off    zigbee    Bluetooth    mijia    tuya    TRIO CCT	

### DIMENSION (unit: mm)

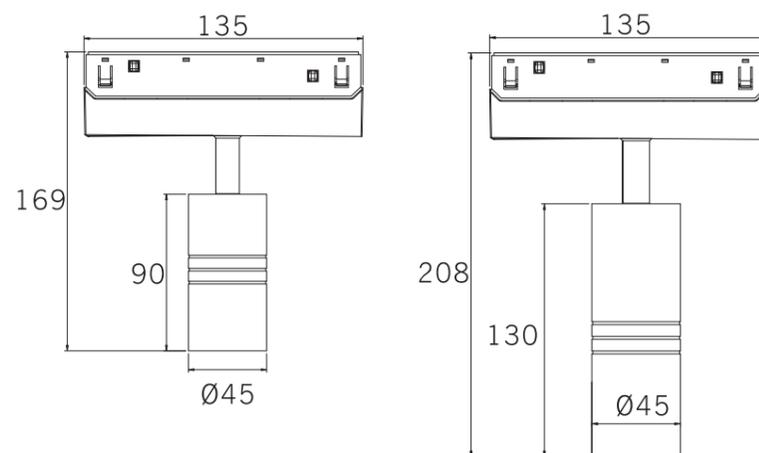

### BEAM ANGLE

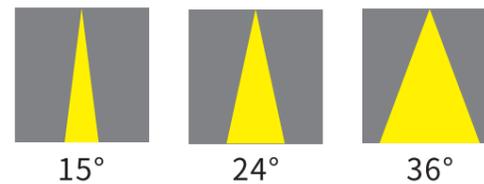

M203-TL2-7W



M203-TL2-12W

### Notes:

\*For other options special request, please contact us.

\*For the most updated product information, please go to our website.


# M203-AGUSTA | Track light series

TL2 SERIES


## BASIC INFORMATION

<b>PRODUCT CODE</b>	M203-TL2-16W	M203-TL2-20W
<b>WATT</b>	16W	20W
<b>LUMEN</b>	1400lm	1800lm
<b>PRODUCT SIZE</b>	L135xØ60xH187	L135xØ60xH225
<b>VOLTAGE</b>	40-48V	
<b>CRI</b>	Ra>90	
<b>FINISH</b>	● BK ○ WH ● BR	
<b>CCT</b>	● 3000K / ● 4000K / ● 5000K	
<b>SYSTEM OPTIONS</b>	On/off    zigbee    Bluetooth    mija    tuya    TRIO CCT	

### DIMENSION (unit: mm)

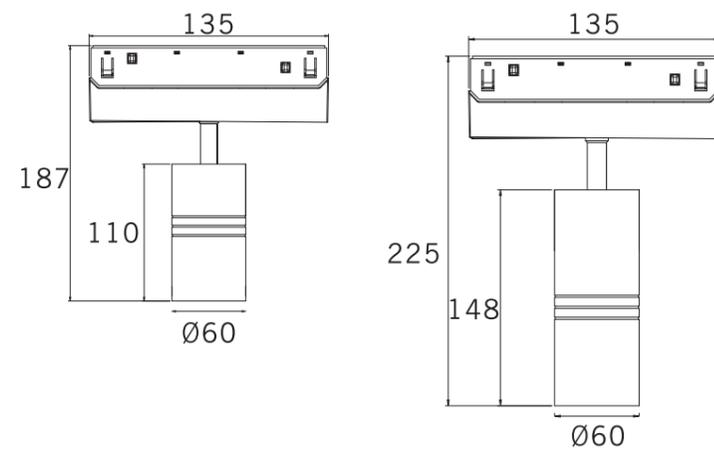


### BEAM ANGLE

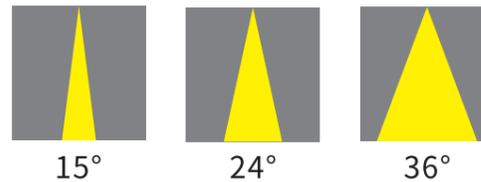

M203-TL2-16W



M203-TL2-20W

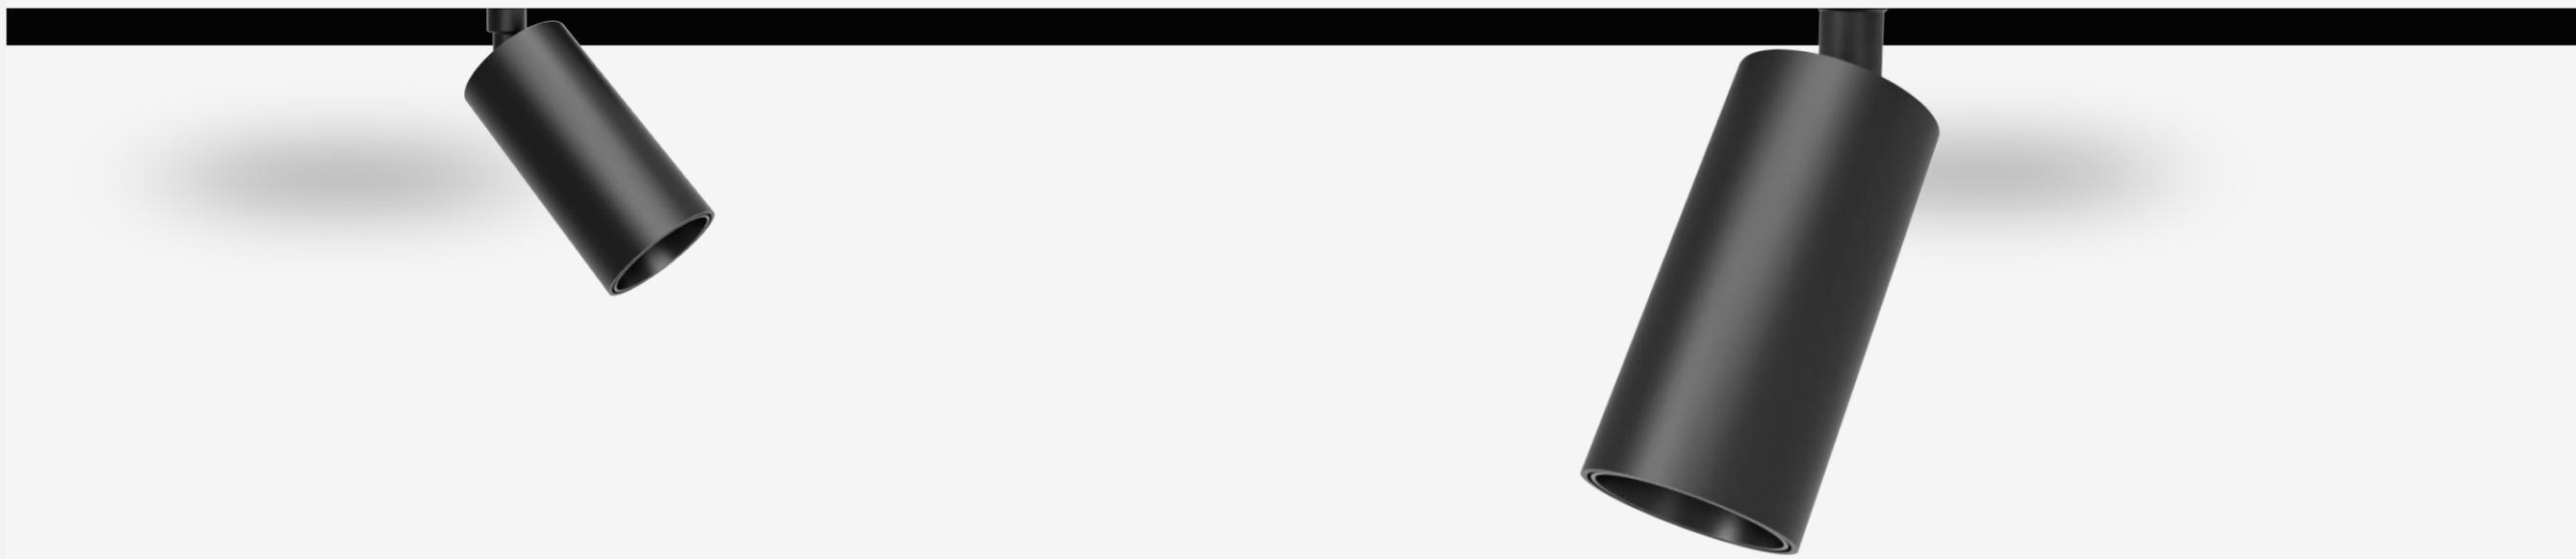

# M203-AGUSTA | Track light series

SL SERIES

## BASIC INFORMATION

PRODUCT CODE	M203-SL-5W	M203-SL-7W	M203-SL-12W	M203-SL-15W
WATT	5W	7W	12W	15W
LUMEN	414lm	568lm	961lm	1266lm
PRODUCT SIZE	L135xØ31xH113	L135xØ31xH162.5	L135xØ44.5xH149	L135xØ44.5xH189

VOLTAGE 40-48V


CRI Ra>90

FINISH ● BK ○ WH ● BR


CCT ● 3000K / ● 4000K / ● 5000K

SYSTEM OPTIONS On/off |  zigbee |  Bluetooth |  mijia |  tuya |  TRIO CCT

## DIMENSION (unit: mm)

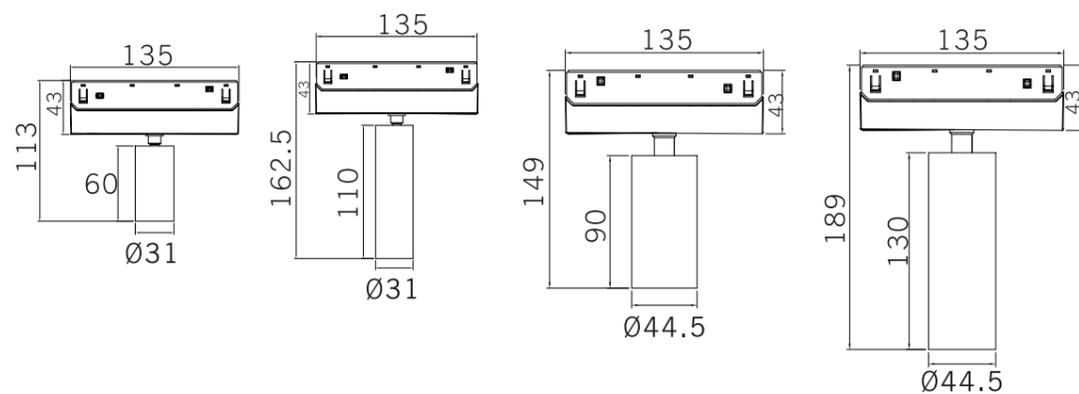

## BEAM ANGLE

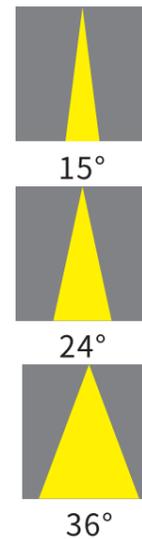

M203-SL-5W



M203-SL-7W



M203-SL-12W



M203-SL-15W



# M203-AGUSTA | Track light series


TL SERIES

## BASIC INFORMATION


<b>PRODUCT CODE</b>	M203-TL-12W	M203-TL-20W	M203-TL-30W
<b>WATT</b>	12W	20W	30W
<b>LUMEN</b>	960lm	1600lm	2400lm
<b>PRODUCT SIZE</b>	L126.5xØ49xH188	L126.5xØ61xH200.6	L126.5xØ75xH200.6

<b>VOLTAGE</b>	40-48V
<b>CRI</b>	Ra>90
<b>FINISH</b>	● BK ○ WH ● BR
<b>CCT</b>	● 3000K / ● 4000K / ● 5000K
<b>SYSTEM OPTIONS</b>	On/off    zigbee    Bluetooth™    mija    tuya    TRIO CCT

### DIMENSION (unit: mm)

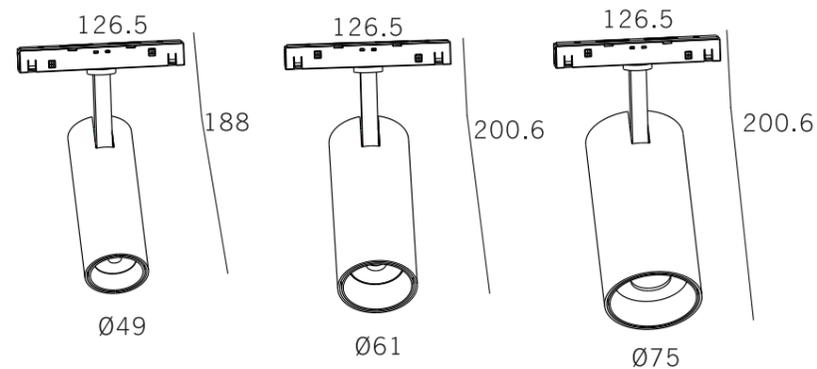

### BEAM ANGLE

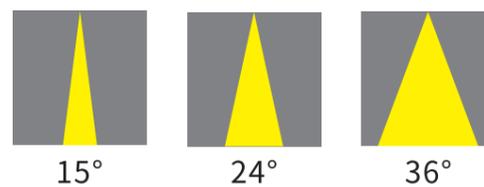

M203-TL-12W

M203-TL-20W

M203-TL-30W

# M203-NATASHA | Grille Folding Light Series


DFSFSERIES

## BASIC INFORMATION

<b>PRODUCT CODE</b>	M203-DFSFS-6W	M203-DFSFS-12W
<b>WATT</b>	6W	12W
<b>LUMEN</b>	270lm	560lm
<b>PRODUCT SIZE</b>	127x22x106	220.5x22x106

<b>VOLTAGE</b>	40-48V
<b>CRI</b>	Ra>90
<b>FINISH</b>	● BK ○ WH
<b>CCT</b>	● 3000K / ● 4000K / ● 5000K
<b>SYSTEM OPTIONS</b>	On/off    zigbee    Bluetooth    mija    tuya    TRIO CCT

## DIMENSION (unit: mm)

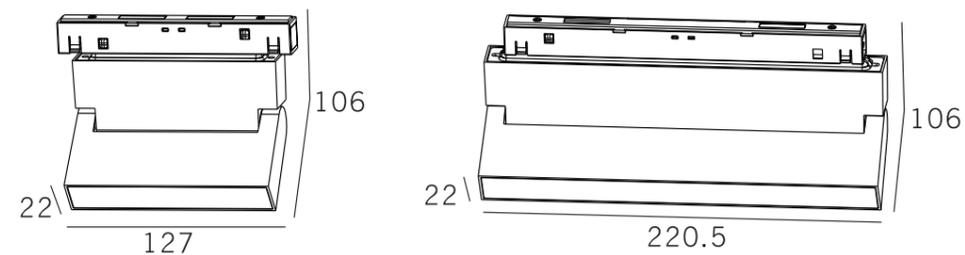

## BEAM ANGLE



M203-DFSFS-6W



M203-DFSFS-12W



## Notes:

\*For other options special request, please contact us.

\*For the most updated product information, please go to our website.

# M203-NATASHA | Grille Folding Light Series


LBF SERIES

## BASIC INFORMATION


<b>PRODUCT CODE</b>	M203-LBF-6W	M203-LBF-12W
<b>WATT</b>	6W	12W
<b>LUMEN</b>	580lm	1100lm
<b>PRODUCT SIZE</b>	L127xW22xH106	L220.5xW22xH106

<b>VOLTAGE</b>	40-48V
<b>CRI</b>	Ra>90
<b>FINISH</b>	● BK ○ WH
<b>CCT</b>	● 3000K / ● 4000K / ● 5000K
<b>SYSTEM OPTIONS</b>	On/off    zigbee    Bluetooth    mija    tuya    TRIO CCT

## DIMENSION (unit: mm)

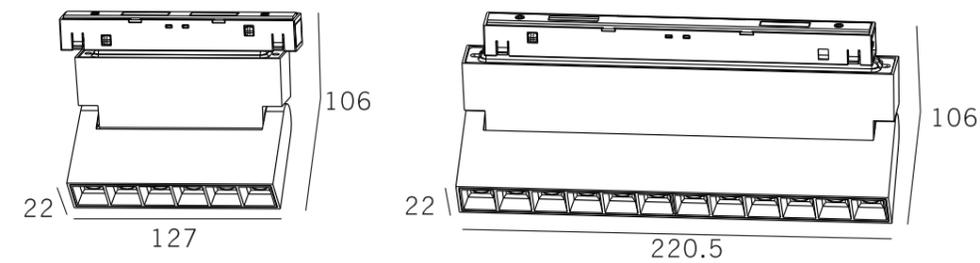

## BEAM ANGLE




M203-LBF-6W



M203-LBF-12W






# M203-ULTRON-90 | Floodlight series

DFS SERIES

## BASIC INFORMATION

<b>PRODUCT CODE</b>	M203-DFS-90D	M203-DFS-90IN
<b>WATT</b>	20W	20W
<b>LUMEN</b>	1400lm	1400lm
<b>PRODUCT SIZE</b>	L307xW322xH42.8	L330xW330xH42.8
<b>VOLTAGE</b>	40-48V	
<b>CRI</b>	Ra>90	
<b>FINISH</b>	● BK ○ WH	
<b>CCT</b>	● 3000K / ● 4000K / ● 5000K	
<b>SYSTEM OPTIONS</b>	On/off    zigbee    Bluetooth    mijia    tuya    TRIO CCT	

### DIMENSION (unit: mm)

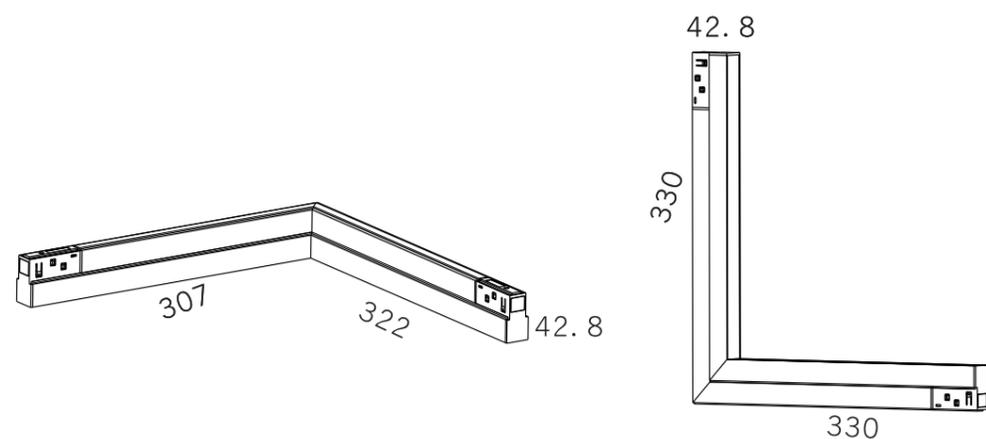


### BEAM ANGLE



M203-DFS-90D



M203-DFS-90IN



Mx Shining Limited

# M203-SPIDER | Chandelier Series


FM SERIES

## BASIC INFORMATION


<b>PRODUCT CODE</b>	M203-FM-7W	M203-FM-15W
<b>WATT</b>	7W	15W
<b>LUMEN</b>	598lm	1365lm
<b>PRODUCT SIZE</b>	L135xØ32xH1000	L135xØ45xH1000

<b>VOLTAGE</b>	40-48V
<b>CRI</b>	Ra>90
<b>FINISH</b>	● BK ○ WH
<b>CCT</b>	● 3000K / ● 4000K / ● 5000K
<b>SYSTEM OPTIONS</b>	On/off    zigbee    Bluetooth    mijia    tuya    TRIO CCT

## DIMENSION (unit: mm)

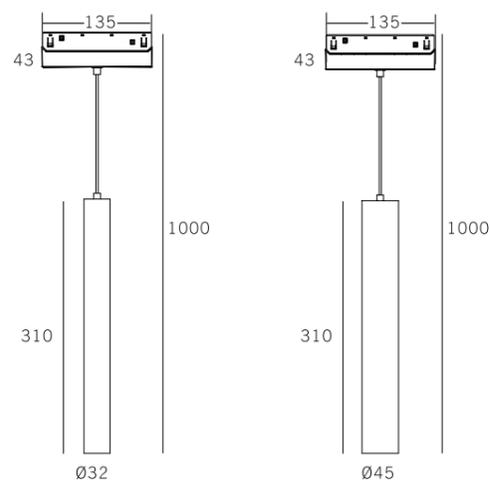

## BEAM ANGLE

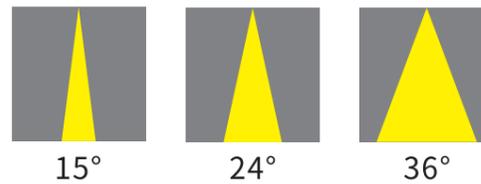

M203-FM-7W



M203-FM-15W



# M203-BOLING | Chandelier Series


BL SERIES

## BASIC INFORMATION

PRODUCT CODE	M203-BL	M203-BL2
WATT	10W	10W
LUMEN	1000lm	1000lm
PRODUCT SIZE	L135xØ100xH143	L135xØ100xH1000

VOLTAGE	40-48V
CRI	Ra>90
FINISH	● BK ○ WH ● GD
CCT	● 3000K / ● 4000K / ● 5000K
SYSTEM OPTIONS	On/off    zigbee    Bluetooth    mijia    tuya    TRIO CCT

### DIMENSION (unit: mm)

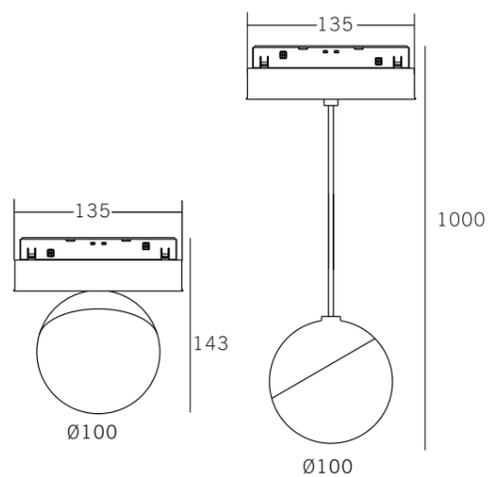


### BEAM ANGLE



100°



M203-BL

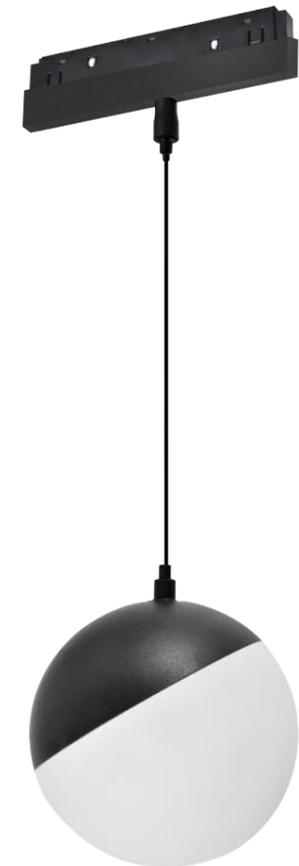

M203-BL2



Mx Shining Limited

# M203-MARLBORO | Chandelier Series

MBO SERIES

## BASIC INFORMATION

<b>PRODUCT CODE</b>	M203-MBO-A	M203-MBO-B
<b>WATT</b>	12W	12W
<b>LUMEN</b>	1100lm	1100lm
<b>PRODUCT SIZE</b>	L135xØ100xH133.6	L135xØ100xH1000

**VOLTAGE** 40-48V


**CRI** Ra>90

**FINISH** ● BK ○ WH ● GD


**CCT** ● 3000K / ● 4000K / ● 5000K

**SYSTEM OPTIONS** On/off |  zigbee |  Bluetooth |  mija |  tuya |  TRIO CCT


### DIMENSION (unit: mm)

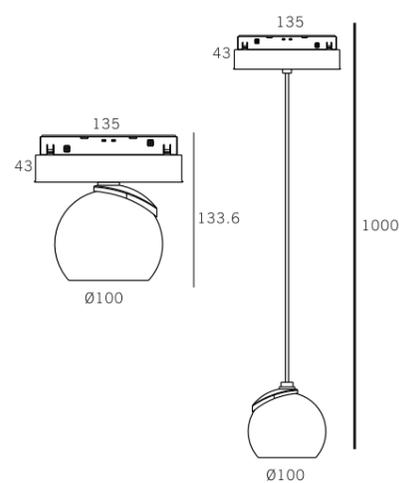


### BEAM ANGLE



M203-MBO-A

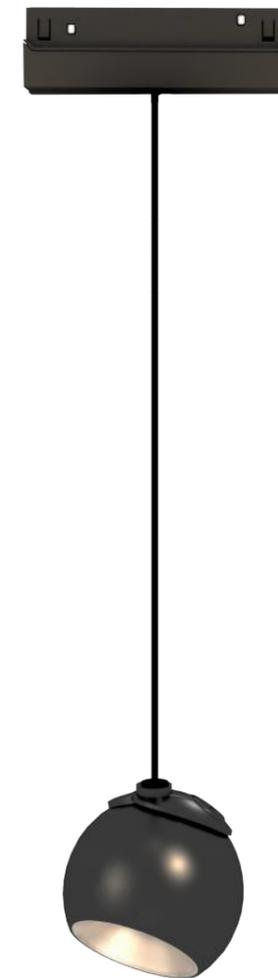

M203-MBO-B

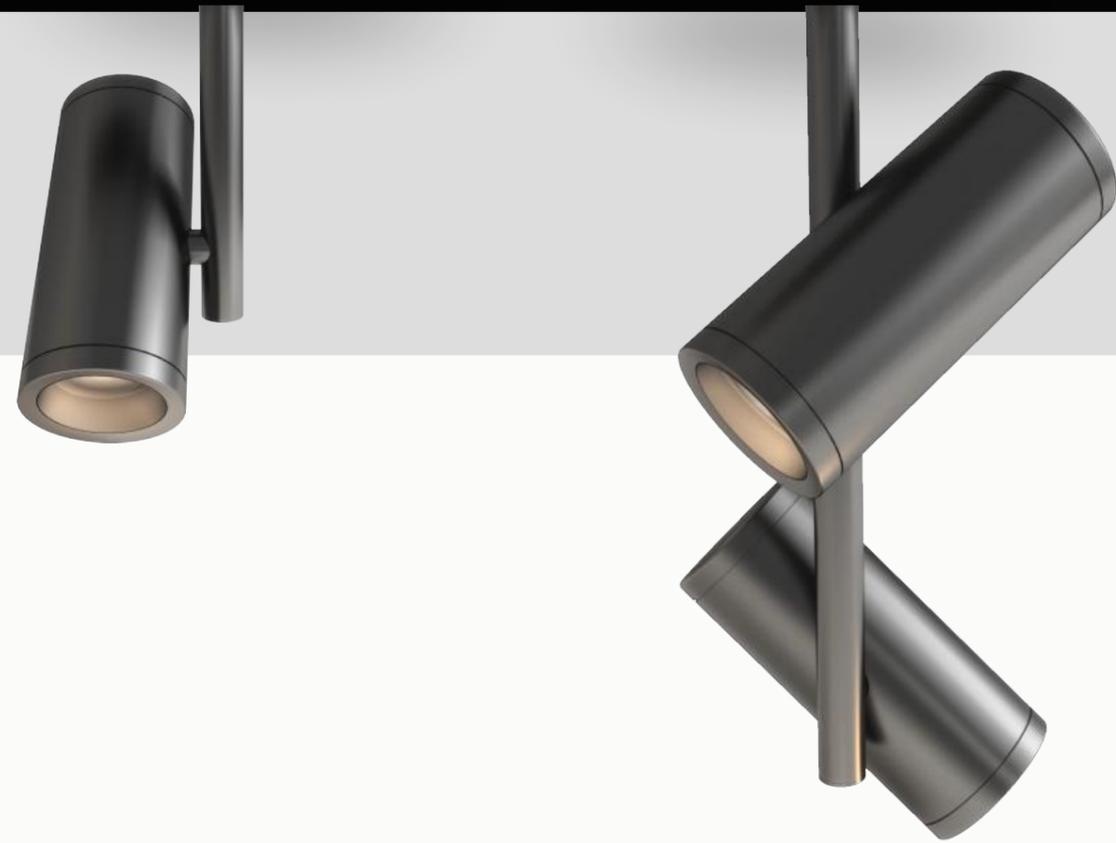


# M203-PISTA | Track light series

PST SERIES


## BASIC INFORMATION

<b>PRODUCT CODE</b>	M203-PST-8W	M203-PST-16W-LR
<b>WATT</b>	8W	8Wx2
<b>LUMEN</b>	640lm	1440lm
<b>PRODUCT SIZE</b>	L135xØ42xH150	L135xØ42xH259
<b>VOLTAGE</b>	40-48V	
<b>CRI</b>	Ra>90	
<b>FINISH</b>	● BK ○ WH ● BR	
<b>CCT</b>	● 3000K / ● 4000K / ● 5000K	
<b>SYSTEM OPTIONS</b>	On/off    zigbee    Bluetooth    mijia    tuya    TRIO CCT	

### DIMENSION (unit: mm)

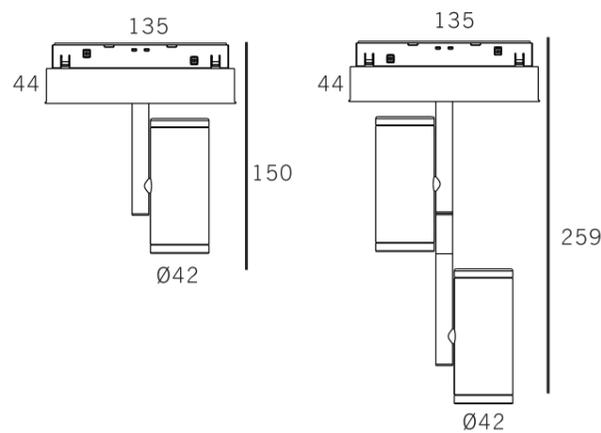


### BEAM ANGLE



M203-PST-10W



M203-PST-16W-LR



# M203-HYDRA | Track light series


HD SERIES

## BASIC INFORMATION


**PRODUCT CODE** M203-HD-12W  
**WATT** 12W  
**LUMEN** 700lm  
**PRODUCT SIZE** L135xØ50xH171

**VOLTAGE** 40-48V  
**CRI** Ra>90  
**FINISH** ● BK ○ WH ● BR  
**CCT** ● 3000K / ● 4000K / ● 5000K  
**SYSTEM OPTIONS** On/off |  zigbee |  Bluetooth |  mijia |  tuya |  TRIO CCT

### DIMENSION (unit: mm)

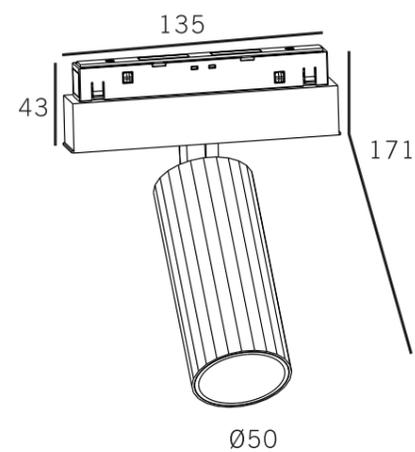

### BEAM ANGLE



M203-HD-12W



# M203-CYCLOPS | Floodlight series


LBP SERIES

## BASIC INFORMATION

<b>PRODUCT CODE</b>	M203-LBP-6W	M203-LBP-12W	M203-LBP-18W
<b>WATT</b>	6W	12W	18W
<b>LUMEN</b>	300lm	610lm	1200lm
<b>PRODUCT SIZE</b>	L126.4xW22xH46	L220xW21.6xH45	L328xW21.6xH45

<b>VOLTAGE</b>	40-48V
<b>CRI</b>	Ra>90
<b>FINISH</b>	● BK ○ WH
<b>CCT</b>	● 3000K / ● 4000K / ● 5000K
<b>SYSTEM OPTIONS</b>	On/off    zigbee    Bluetooth    mija    tuya    TRIO CCT

### DIMENSION (unit: mm)

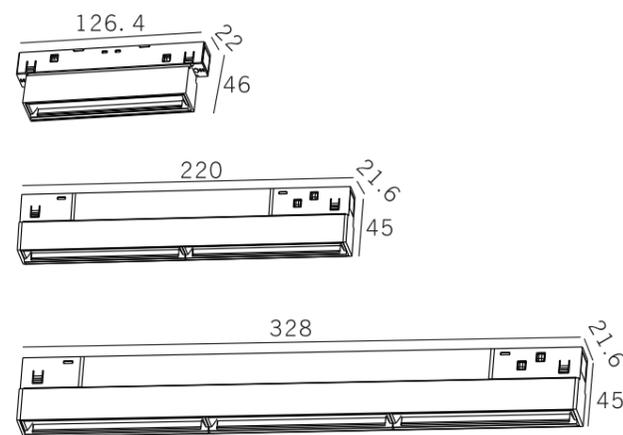

### BEAM ANGLE



Wall washer



# M203-YELENA | Track light series


LBF4 SERIES

## BASIC INFORMATION


**PRODUCT CODE** M203-LBF4-12W  
**WATT** 12W  
**LUMEN** 960lm  
**PRODUCT SIZE** L220xW16.3xH115

**VOLTAGE** 40-48V  
**CRI** Ra>90  
**FINISH** ● BK ○ WH  
**CCT** ● 3000K / ● 4000K / ● 5000K  
**SYSTEM OPTIONS** On/off |  zigbee |  Bluetooth |  mijia |  tuya |  TRIO CCT

### DIMENSION (unit: mm)

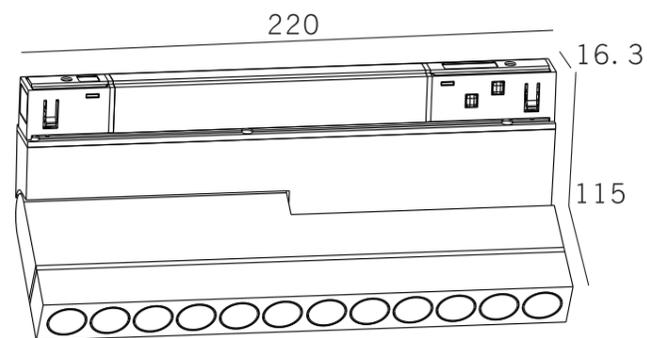

### BEAM ANGLE



M203-LBF4-12W

# M203-CYCLOPS-B | Track light series


LB2 SERIES

## BASIC INFORMATION


**PRODUCT CODE** M203-LB2-12W  
**WATT** 12W  
**LUMEN** 960lm  
**PRODUCT SIZE** 220x22x43

**VOLTAGE** 40-48V  
**CRI** Ra>90  
**FINISH** ● BK ○ WH  
**CCT** ● 3000K / ● 4000K / ● 5000K  
**SYSTEM OPTIONS** On/off |  |  |  |  |  TRIO CCT


## DIMENSION (unit: mm)

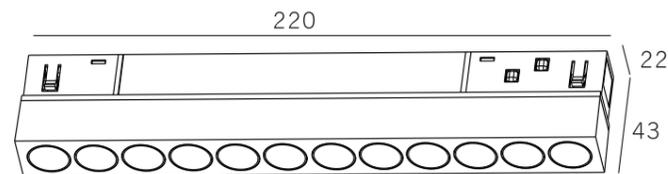

## BEAM ANGLE



M203-LB2-12W

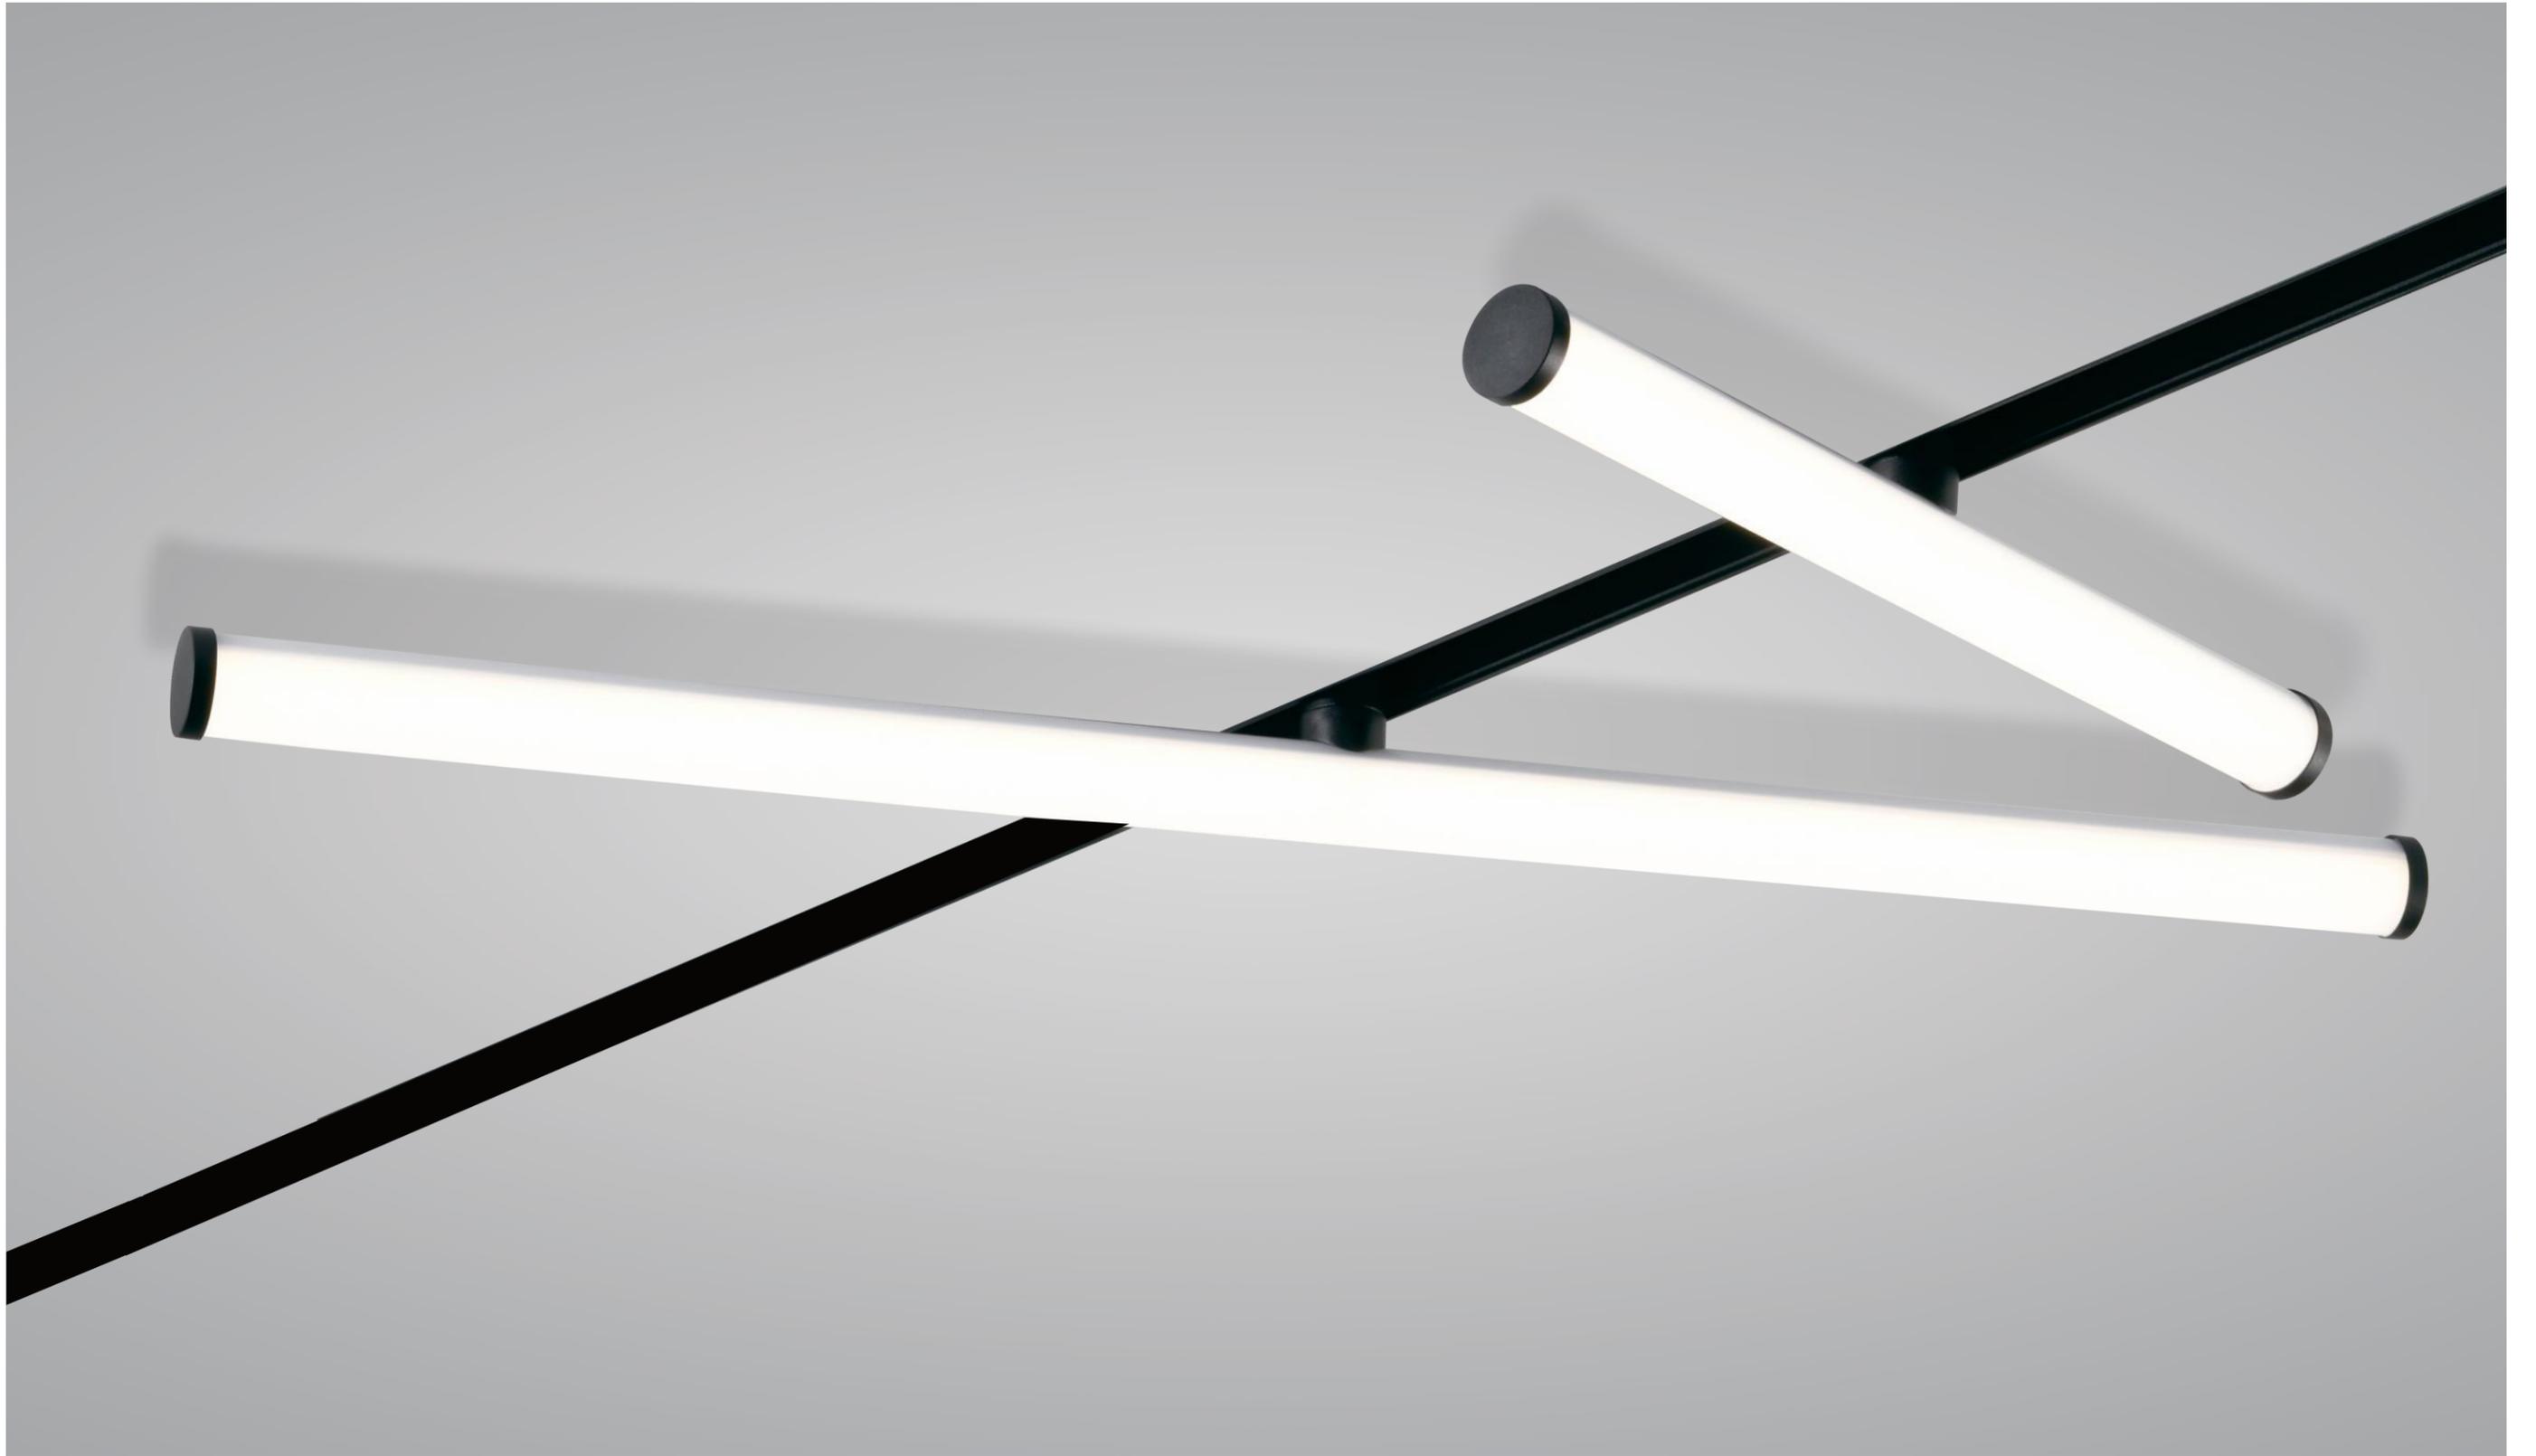

# M203-VISION | Bachelor Light Series

TB SERIES

## BASIC INFORMATION

PRODUCT CODE	M203-TB-300	M203-TB-600
WATT	6W	12W
LUMEN	600lm	1200lm
PRODUCT SIZE	L302xØ27.7xH102	L602xØ27.7xH102

VOLTAGE 40-48V


CRI Ra>90

FINISH ● BK ○ WH

CCT ● 3000K / ● 4000K / ● 5000K

SYSTEM OPTIONS On/off |  zigbee |  Bluetooth |  mijia |  tuya |  TRIO CCT

DIMENSION (unit: mm)

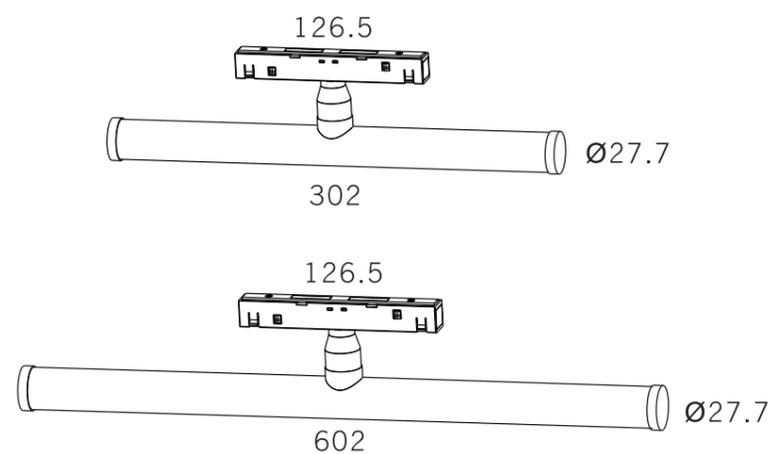

BEAM ANGLE




120°



M203-TB-300



M203-TB-600



# M203 | Neon light Series


NEON SERIES

## BASIC INFORMATION

PRODUCT CODE	M203-NEON-1000	M203-NEON-2000
WATT	18W	36W
LUMEN	1891lm	3713lm
PRODUCT SIZE	L135xØ22xH1000	L135xØ22xH2000

VOLTAGE	40-48V
CRI	Ra>90
FINISH	● BK ○ WH
CCT	● 3000K / ● 4000K / ● 5000K
SYSTEM OPTIONS	On/off    zigbee    Bluetooth    mijia    tuya    TRIO CCT


## DIMENSION (unit: mm)

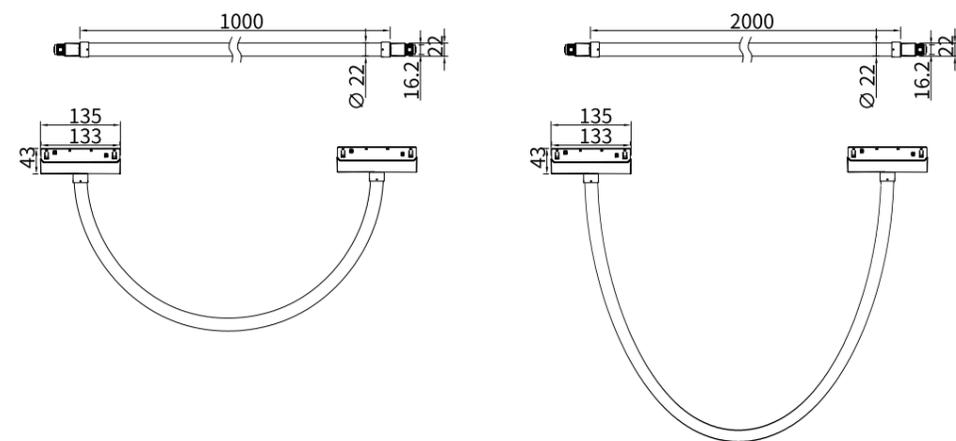

## BEAM ANGLE



120°

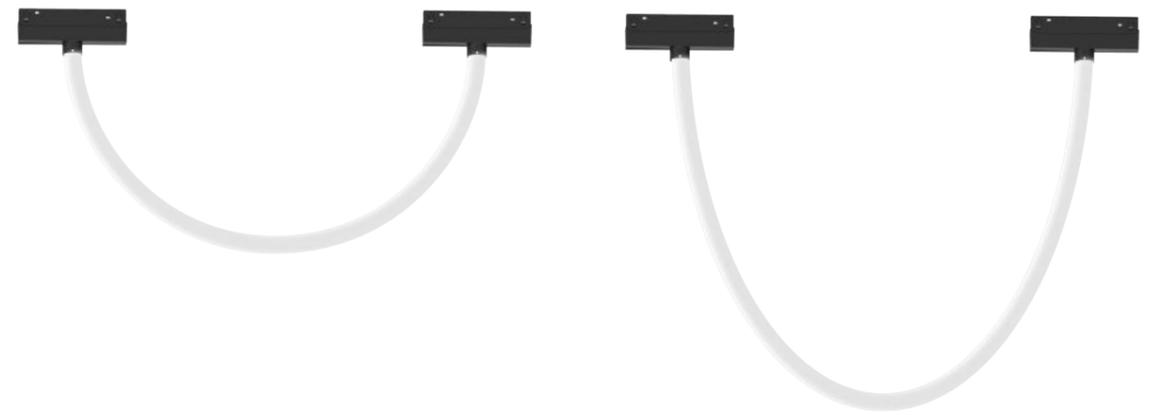

M203-NEON-1000

M203-NEON-2000




# M203 | Spot light Series

D70/90M SERIES

## BASIC INFORMATION

<b>PRODUCT CODE</b>	M203-D70M-8W	M203-D90M-12W
<b>WATT</b>	8W	12W
<b>LUMEN</b>	694lm	917lm
<b>PRODUCT SIZE</b>	L135xØ70xH93	L135xØ90xH96
<b>VOLTAGE</b>	40-48V	
<b>CRI</b>	Ra>90	
<b>FINISH</b>	● BK ○ WH	
<b>CCT</b>	● 3000K / ● 4000K / ● 5000K	
<b>SYSTEM OPTIONS</b>	On/off    zigbee    Bluetooth    mija    tuya    TRIO CCT	

## DIMENSION (unit: mm)

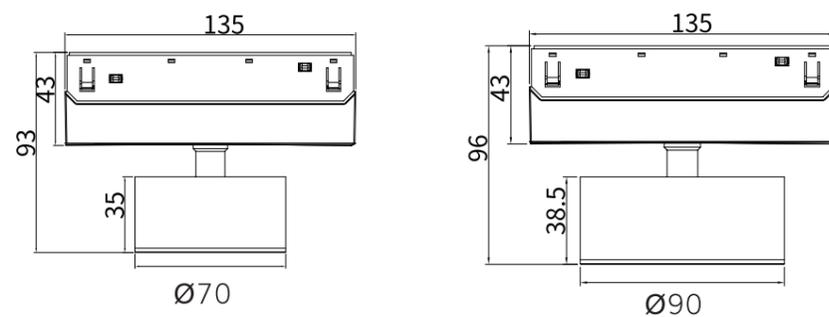

## BEAM ANGLE



120°



M203-D70M-8W



M203-D90M-12W

# M203 | Wall washer Series

LBP2 SERIES

## BASIC INFORMATION

<b>PRODUCT CODE</b>	M203-LBP2-6W	M203-LBP2-12W	M203-LBP2-18W
<b>WATT</b>	6W	12W	18W
<b>LUMEN</b>	/	/	/
<b>PRODUCT SIZE</b>	L104.5xW22xH52.8	L204xW22xH52.8	L304xW22xH52.8

**VOLTAGE** 40-48V


**CRI** Ra>90

**FINISH** ● BK ○ WH

**CCT** ● 3000K / ● 4000K / ● 5000K

**SYSTEM OPTIONS** On/off |  zigbee |  Bluetooth |  mijia |  tuya |  TRIO CCT

## DIMENSION (unit: mm)

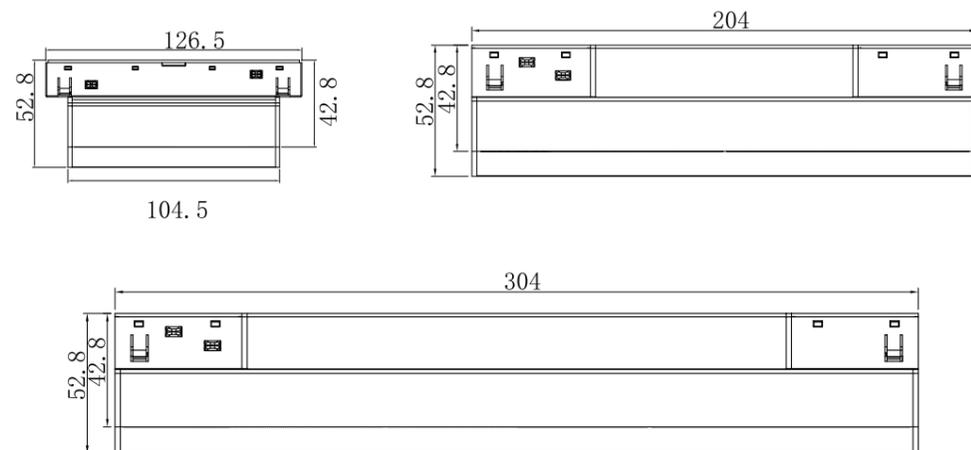

## BEAM ANGLE




Wall washer



M203-LBP2-6W

M203-LBP2-12W

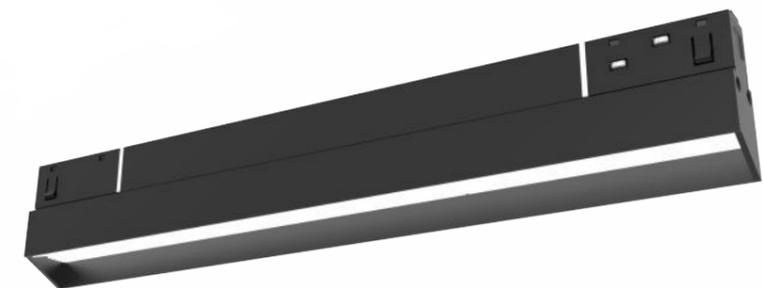

M203-LBP2-18W


# M203-TRACK RAIL | Track series




**S20**  
Size:26.4X78.4X26.4mm




**S20-1**  
Size:26.4X78.4X26.4mm

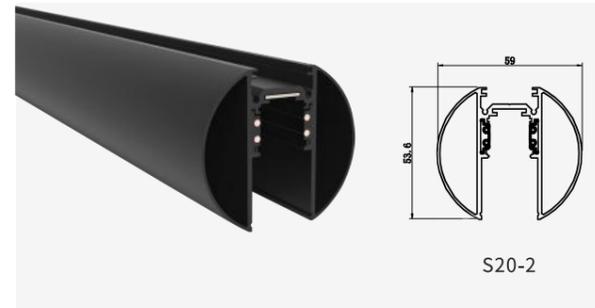


**S20-2**  
Size:59X53.6X59mm

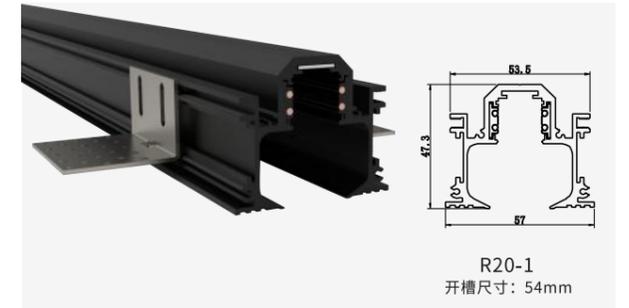


**R20-1**  
Size:53.5X47.3X57mm

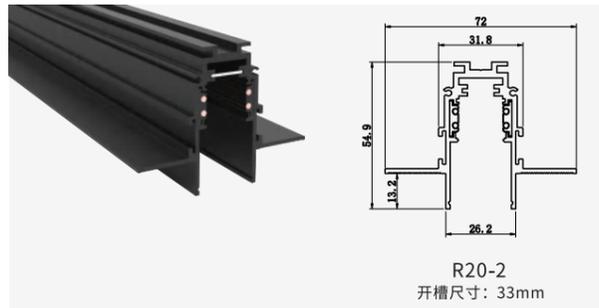


**R20-2**  
Size:72X54.9X26.3mm

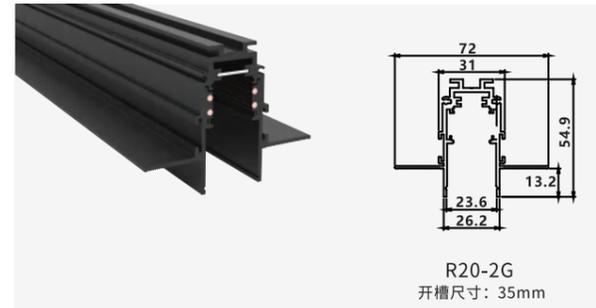


**R20-2G**  
Size:31X53X72mm

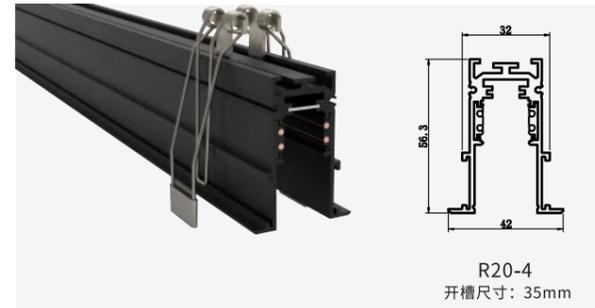


**R20-4**  
Size:32X56.3X42mm

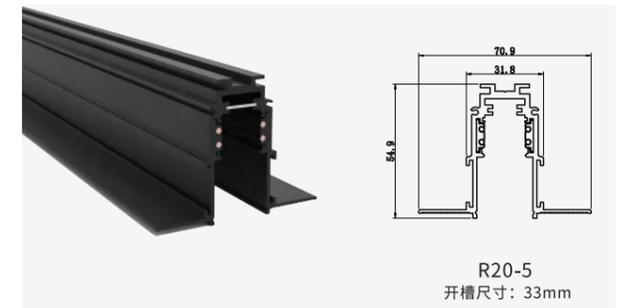


**R20-5**  
Size:70.9X54.9X31.8mm

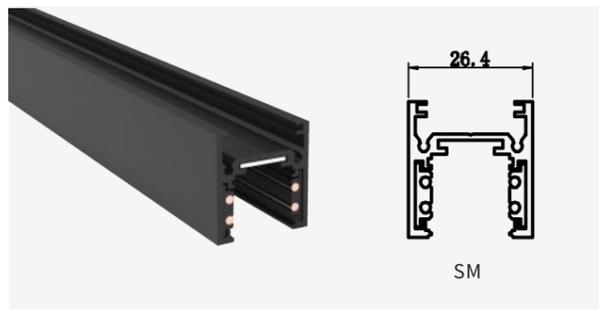

**SM**  
Size:26.4X26.4X26.4mm

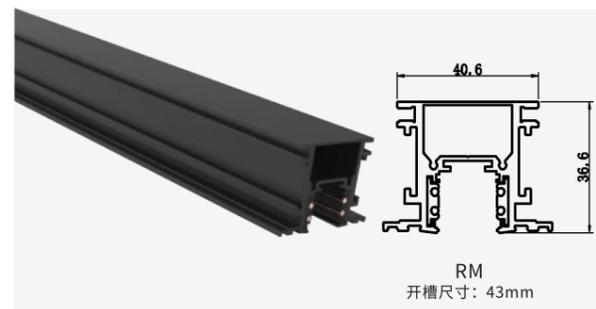


**RM**  
Size:40.6X36.6X48.8mm

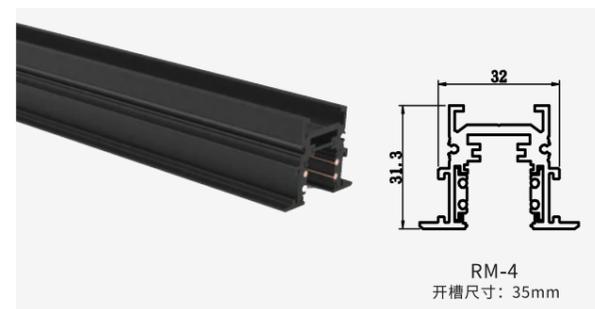

**RM-4**  
Size:31.3X32X42mm

# CONNETION MODULE

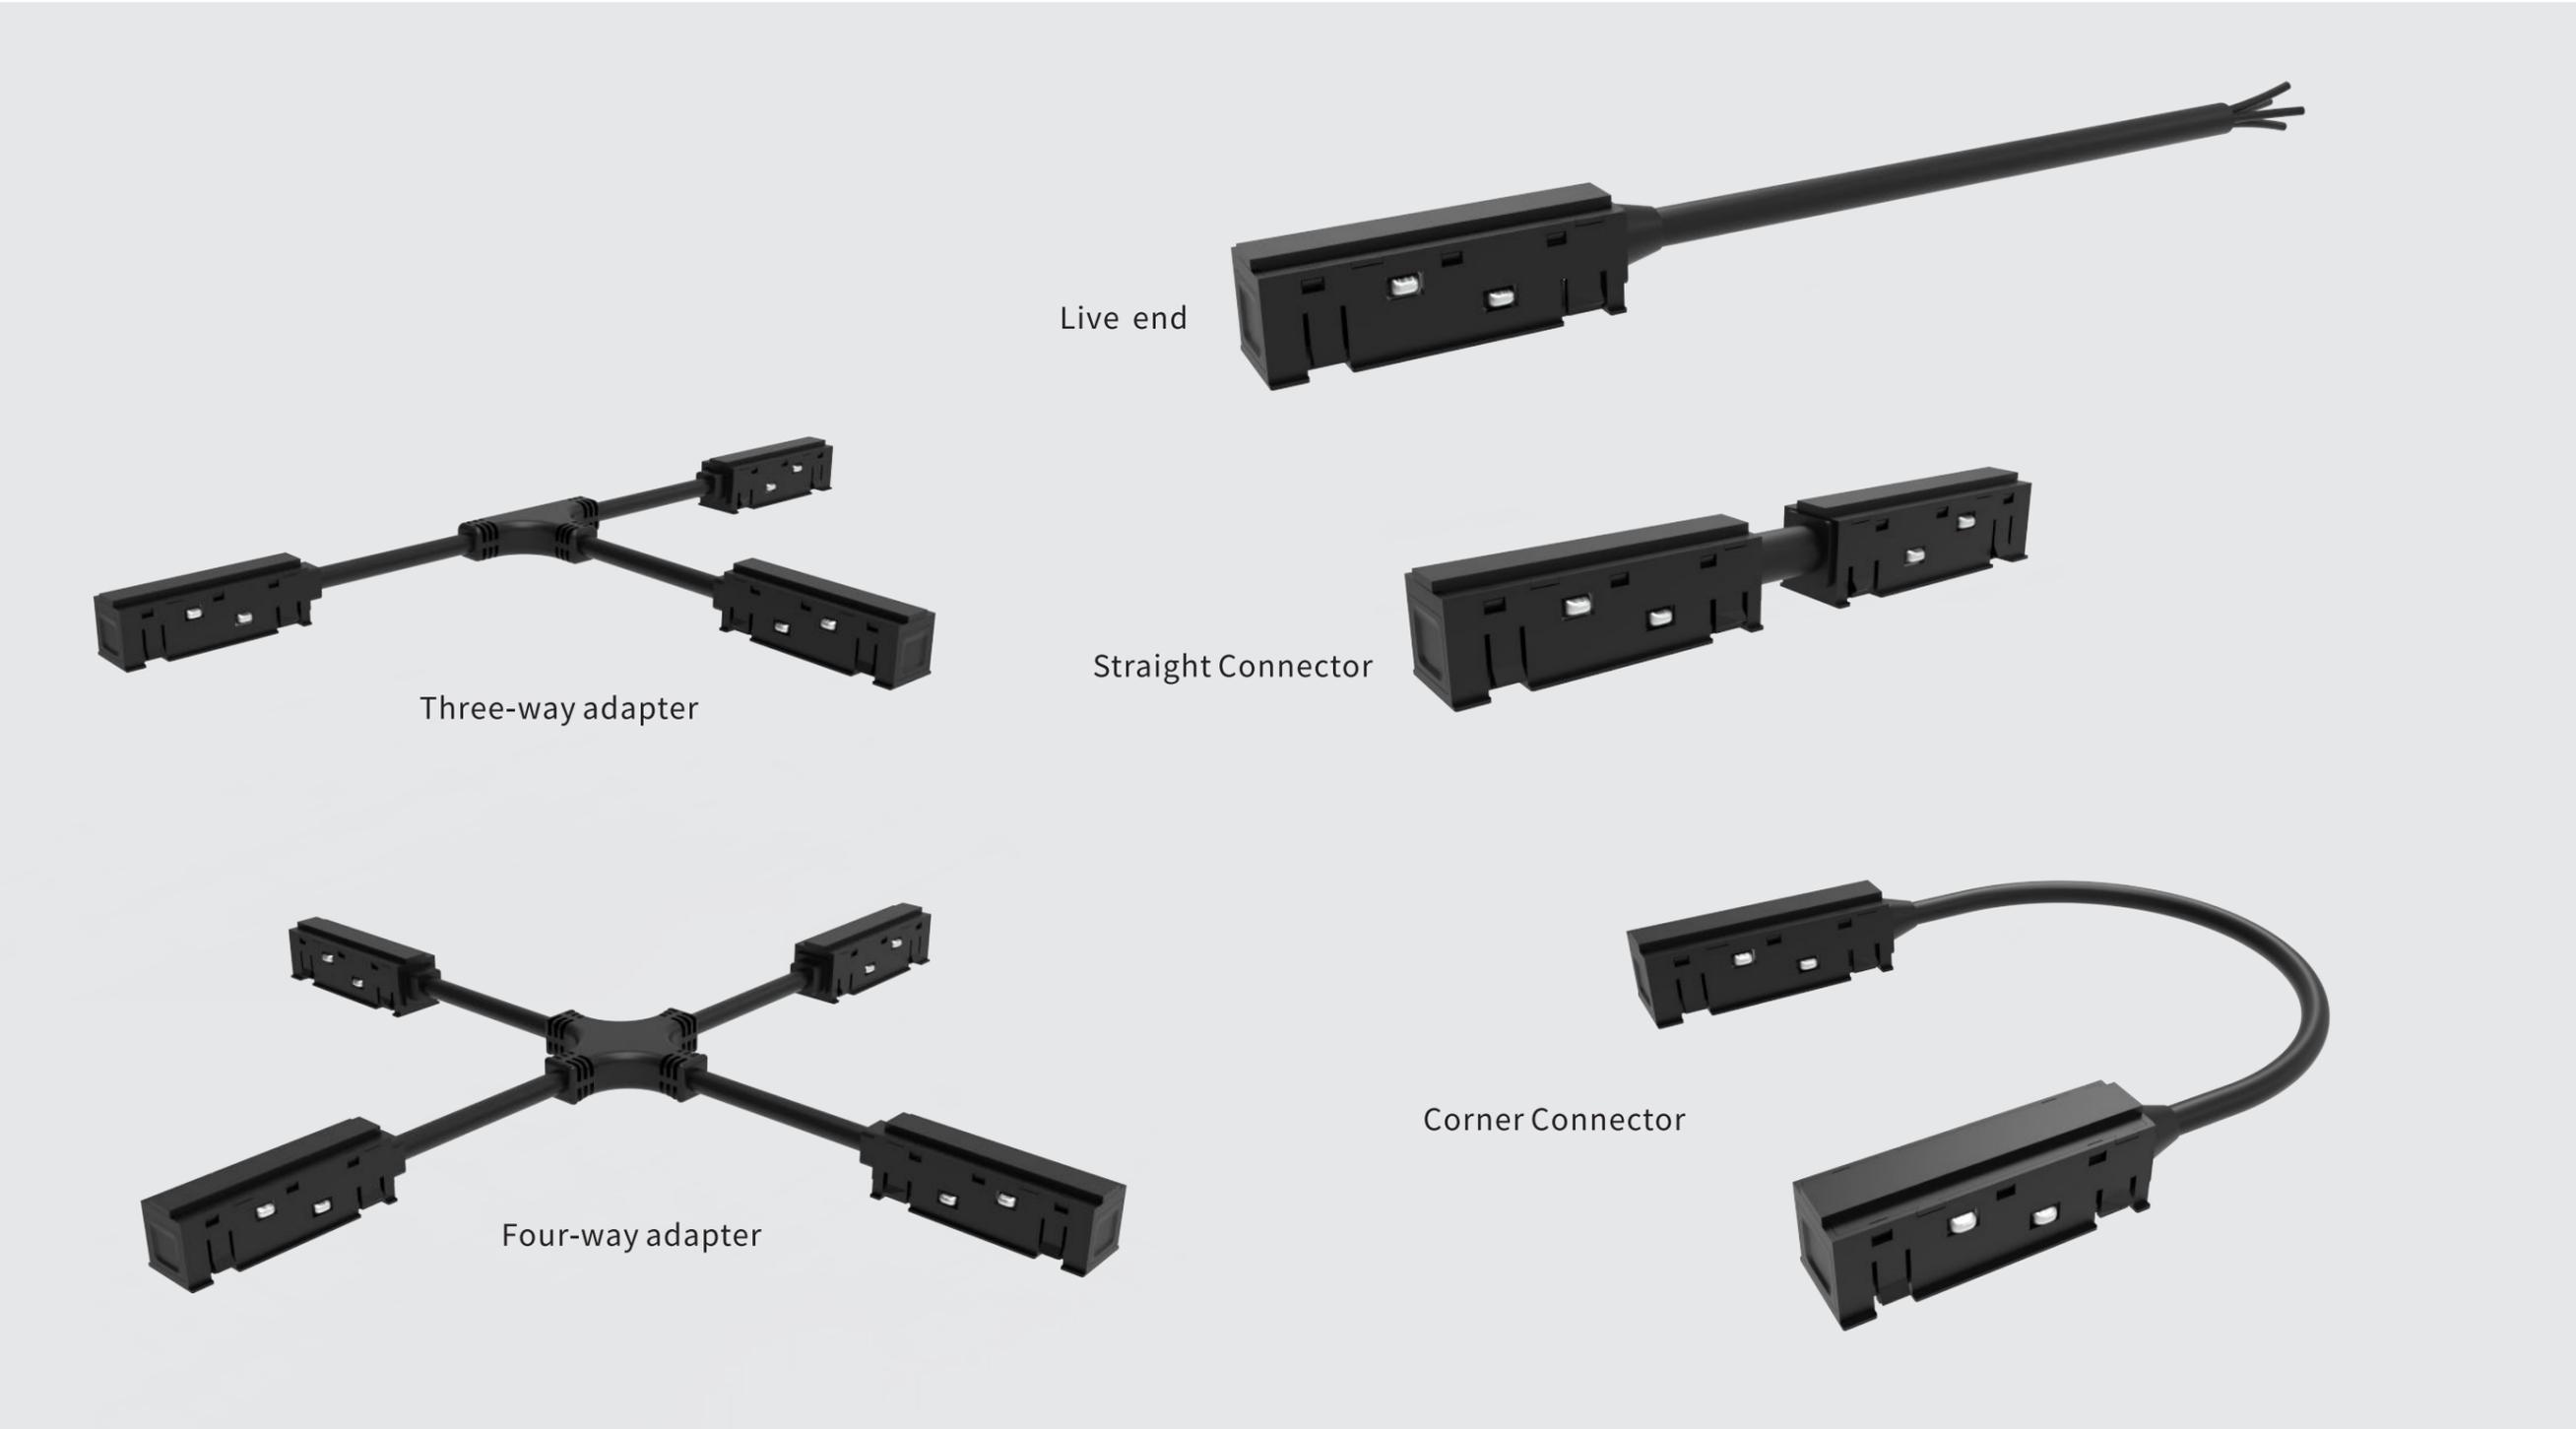

# 48V POWER SUPPLY

Magnet adsorption  
Easy to load and unload

Product Code	Watt	Product Size	Finish	Warranties
M20-CH48V-100	100W	247x43. 3x22	■ BK	2years
M20-CH48V-200	200W	247x43. 3x22	□ WH	2years



RECESSED DOWNLIGHT

# Modular Series



## ETERNITY

Multi-configuration spotlight series; Easy for installation and stock;  
It provides with power from 6W to 18W with the same cutout size;  
Suitable for different applications;



DLM-A

DLM-B



IP54  
DLM-C



DLMR01

DLMR02

DLMR03



Honey comb

Spread Lens

Solite Lens



DLM-D



DLT01-R



DLT01-RN



DLT02-RN



DLT01-S



DLT01-SN



DLTR-A



DLTR-B



DLR-A

DLR-F

DLR-G

DLR-B

DLR-H



DLS-C



DLS-D


DLS-E




DLR-A

DLR-G

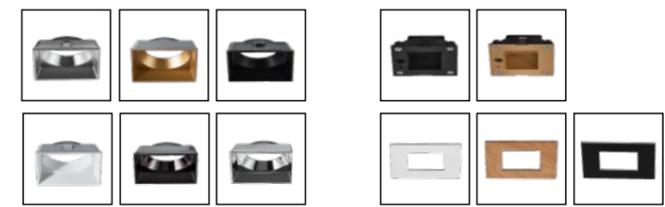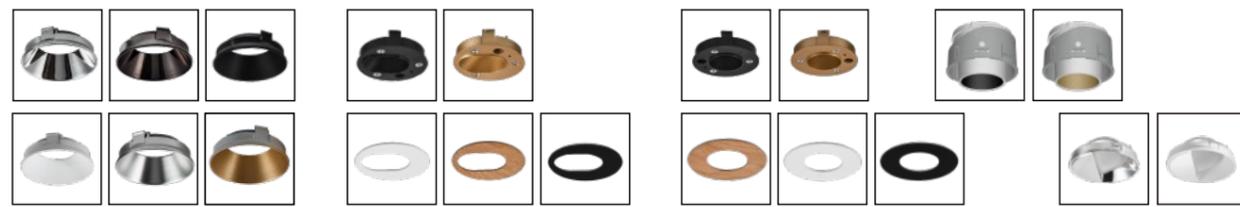

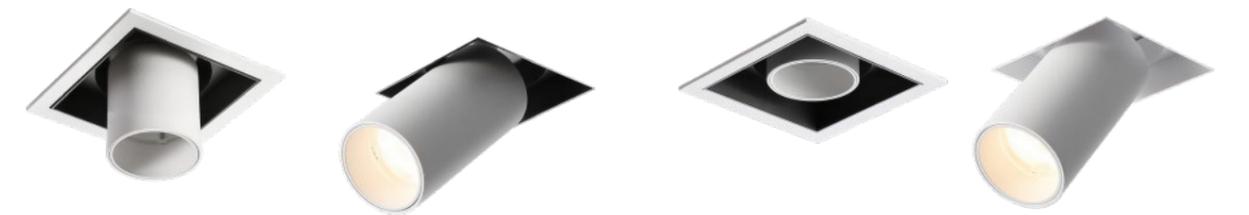

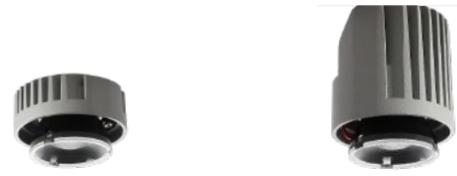

DLM-A

DLM-B



IP54  
DLM-C




DLMR01



DLMR02



DLMR03



Honey comb



Spread Lens




Solite Lens



DLM-D




DLT21-S



75X145




DLT31-S



75X218




DLT41-SA



145X145




DLT41-SNA



145X145




DLT41-S



75X290



DLT21-SN



75X145



DLS-C



DLS-C



DLS-C



DLS-C



DLS-D




DLS-D



DLS-E



DLS-E






-  SCR Dimming
-  0-10V Dimming
-  DALI Dimming
-  Bluetooth Dimming
-  High-power LED SDCM<3
-  CRI > 90
-  Anti-Glare




Mx Shining Limited

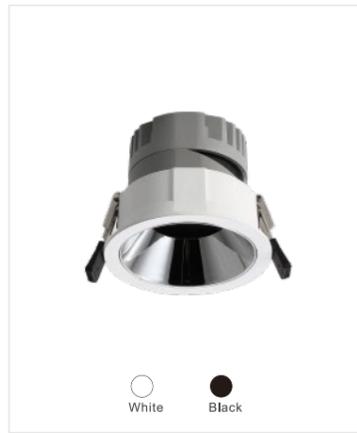

Code No.:DL201-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

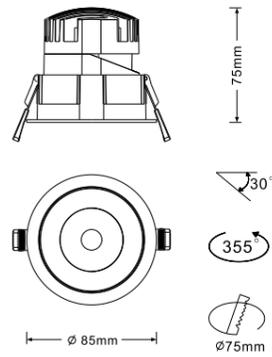


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

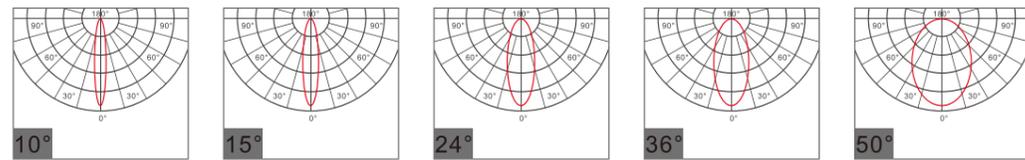

Code No.:DL201-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

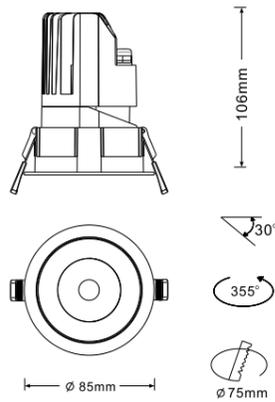


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

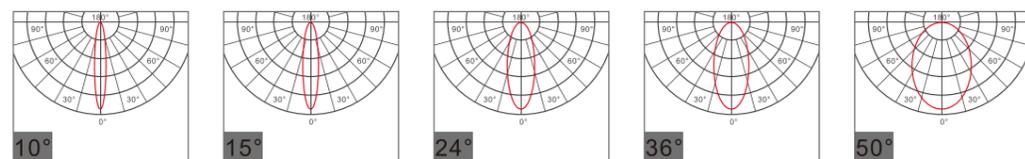

Code No.:DL201N-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

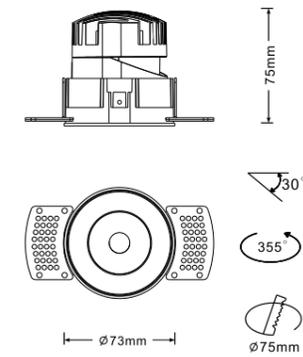


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

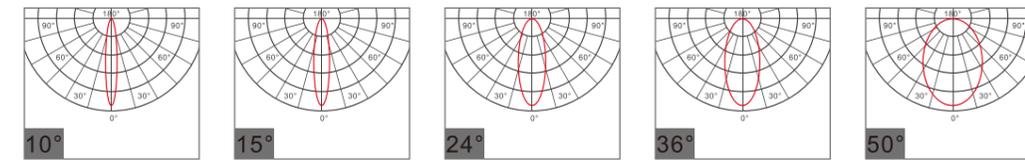

Code No.:DL201N-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

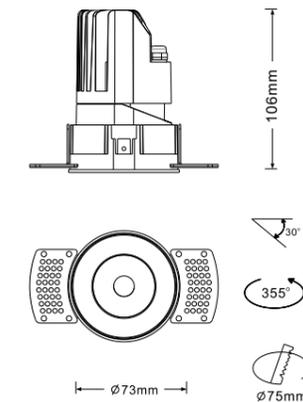


Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

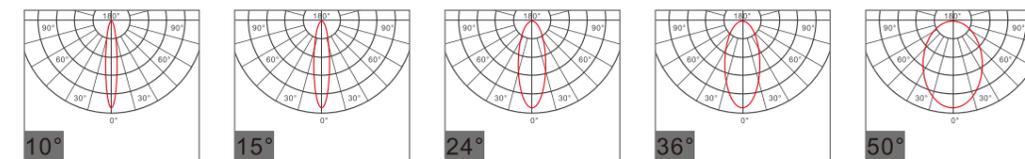

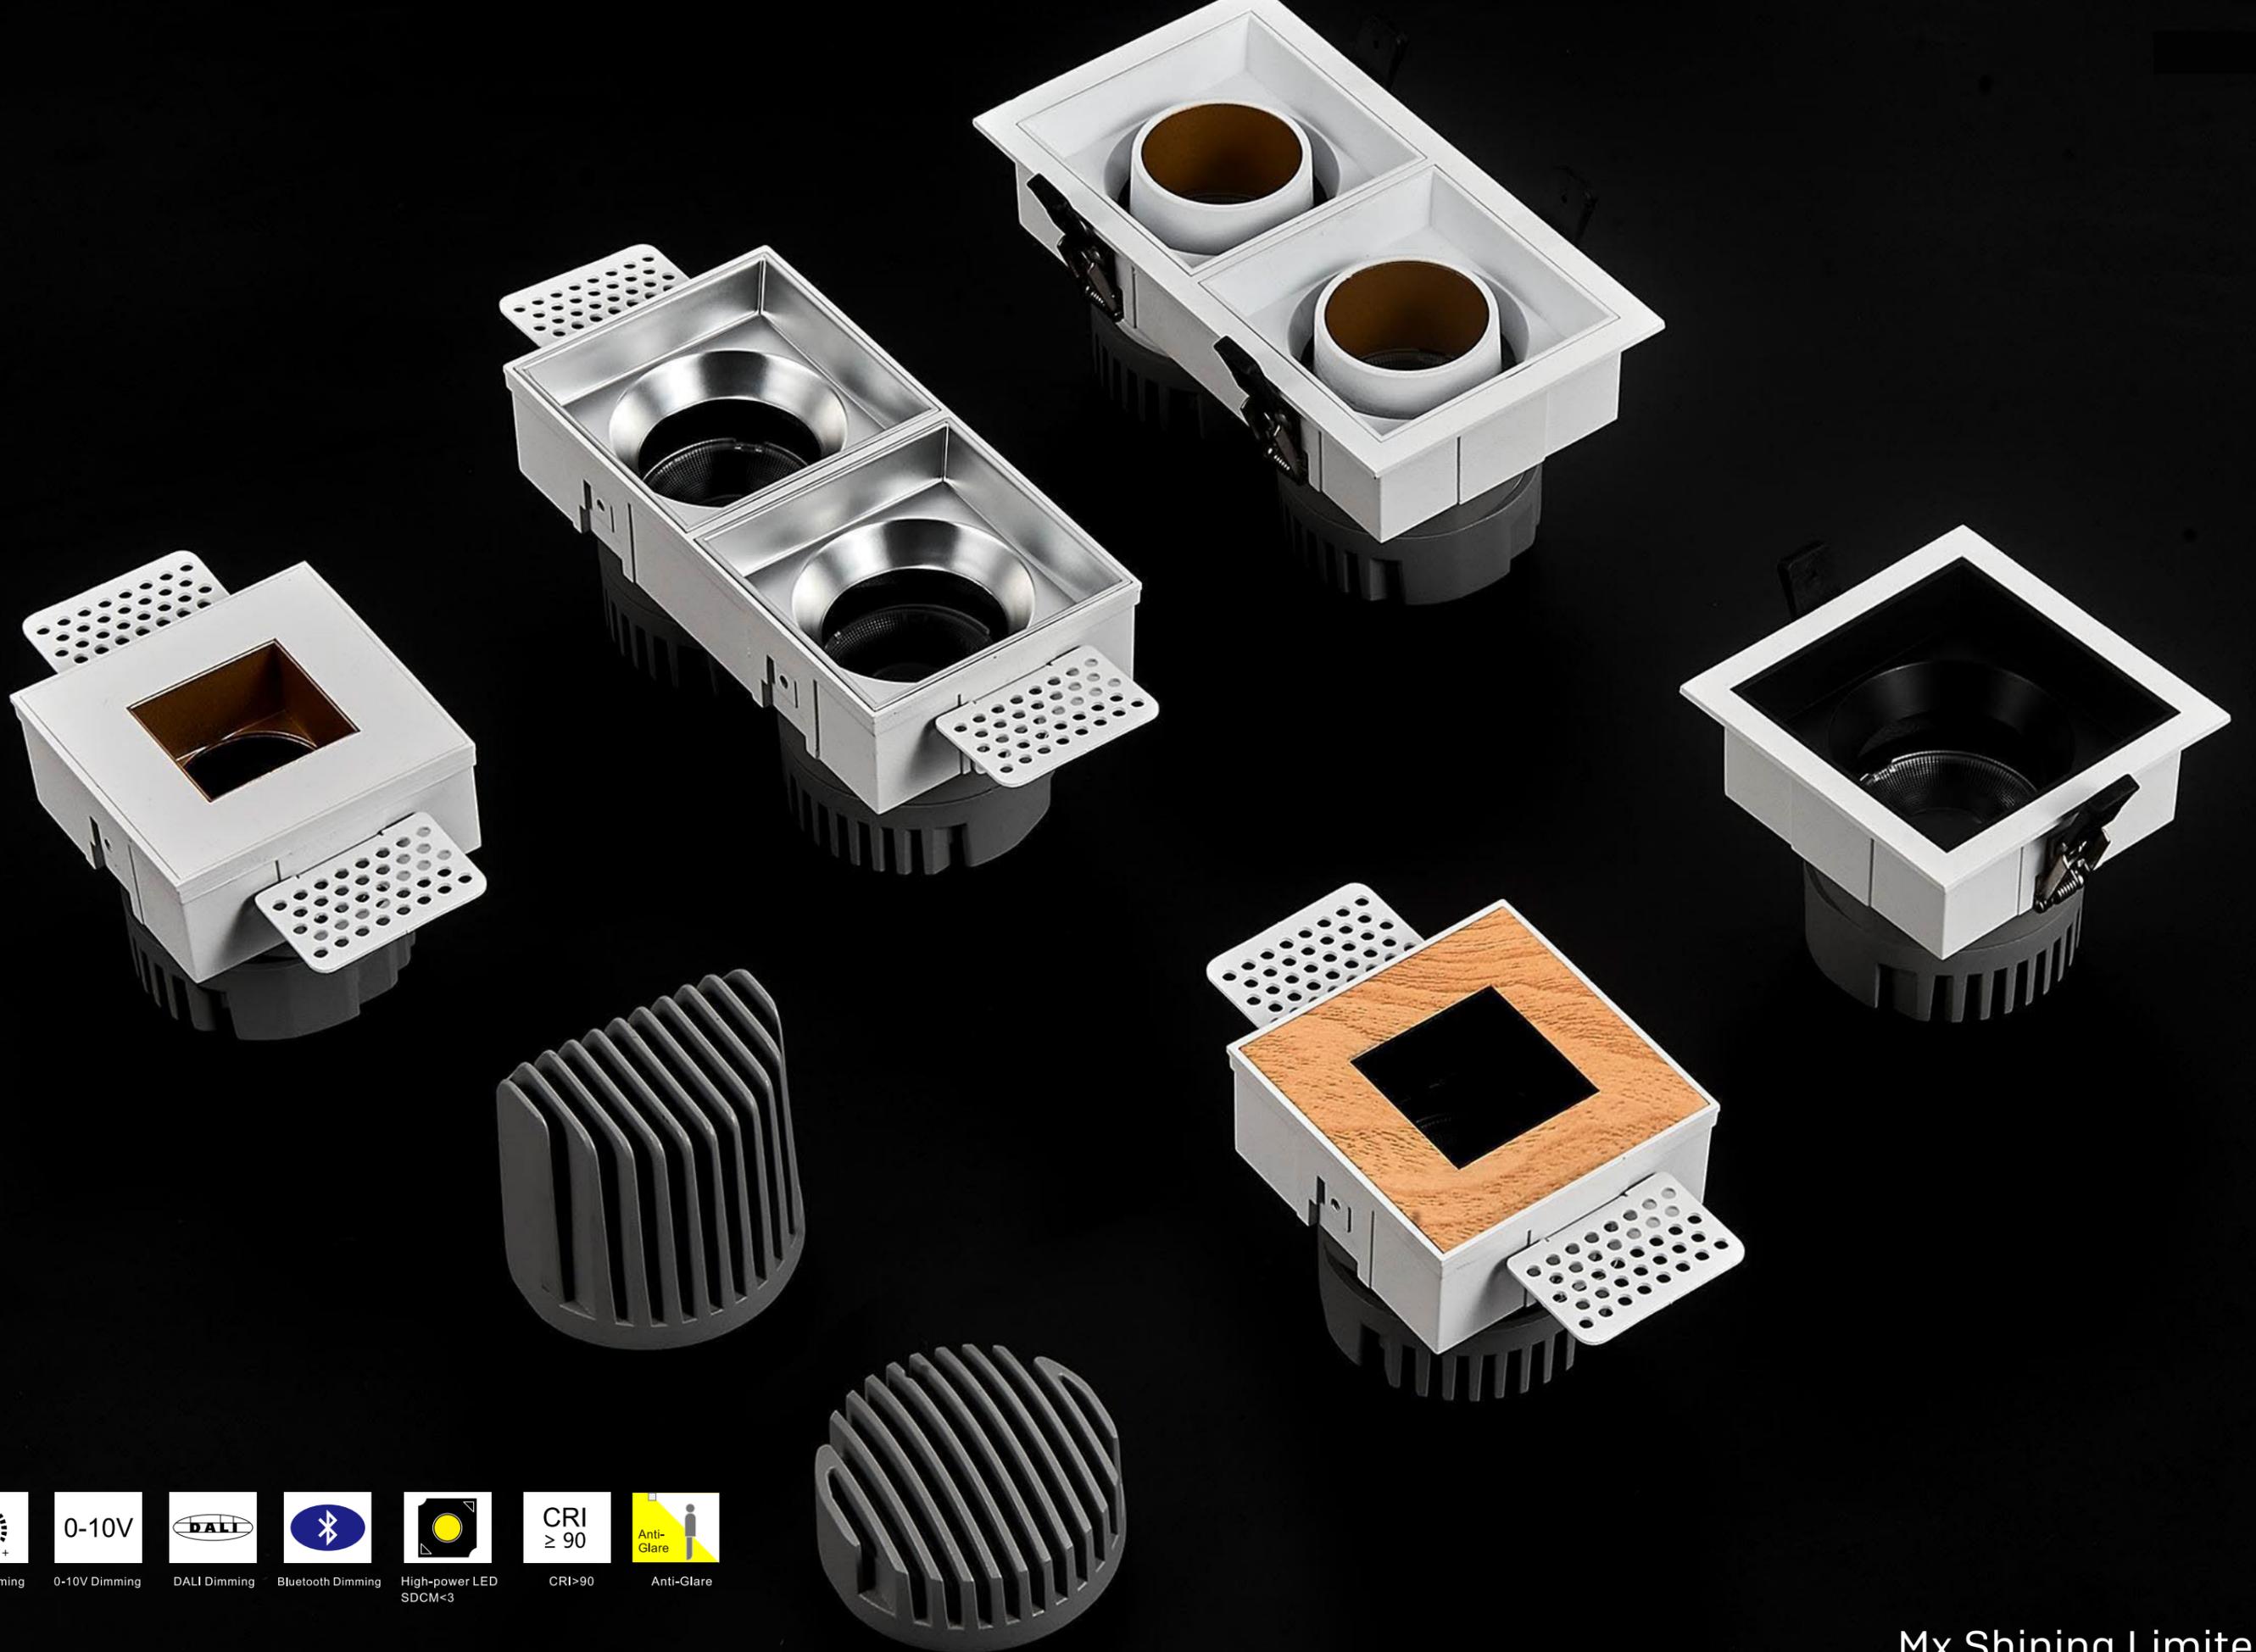


-  SCR Dimming
-  0-10V Dimming
-  DALI Dimming
-  Bluetooth Dimming
-  High-power LED SDCM<3
-  CRI ≥ 90
-  Anti-Glare

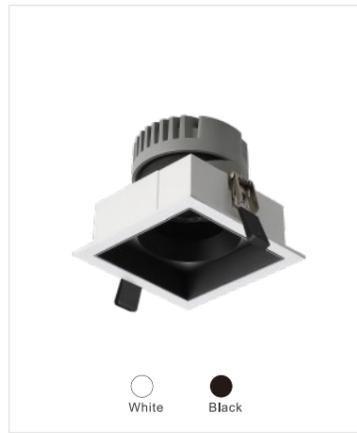


Code No.:DL201S-A


Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

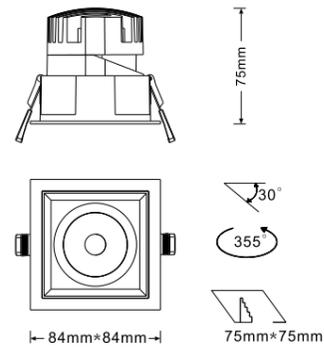

Reflector




Angle


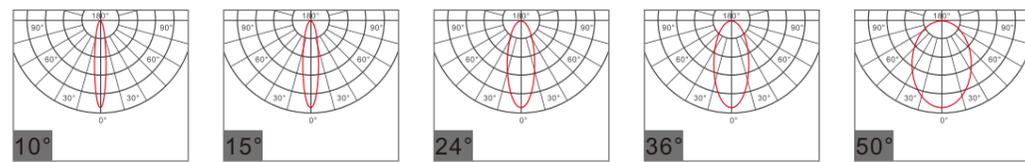


Code No.:DL201S-B


Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

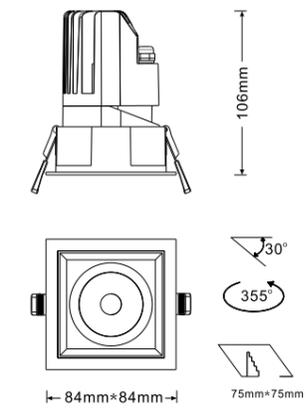


Reflector




Angle

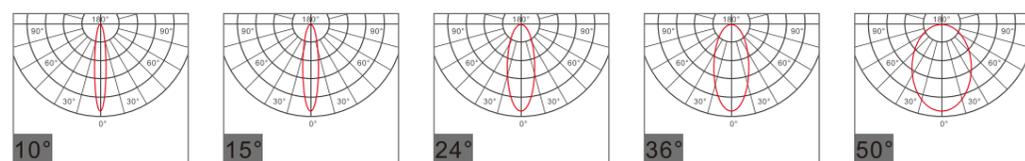

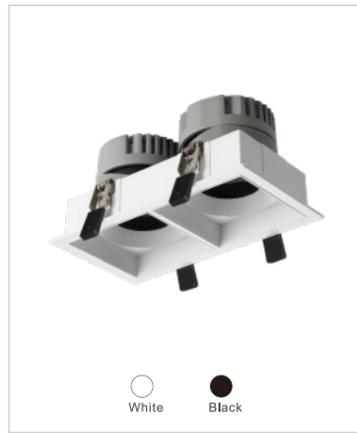


Code No.:DL221-A

Power	MAX 2*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



75mm



156mm\*84mm

30°

355°

145mm\*75mm

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

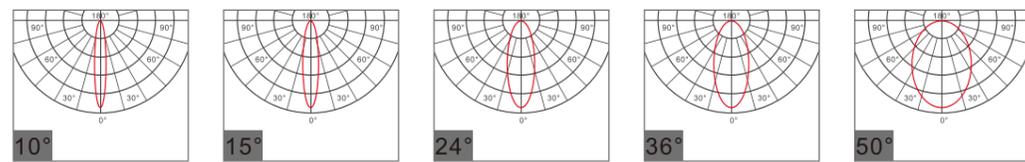


Code No.:DL221-B

Power	MAX 2*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded



106mm



156mm\*84mm


30°

355°

145mm\*75mm

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

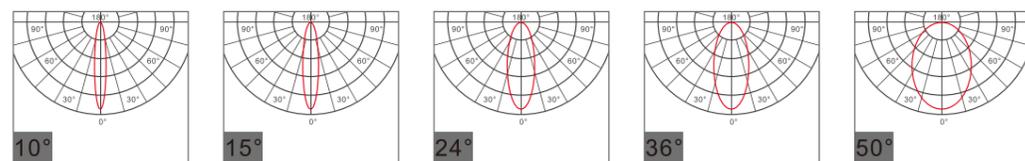



Code No.:DL231-A

Power	MAX 3*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

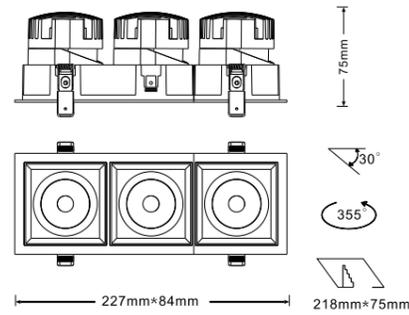

White Black



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

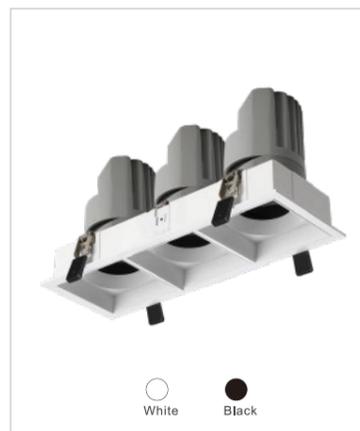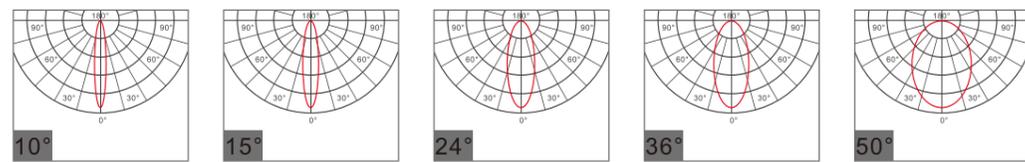


Code No.:DL231-B

Power	MAX 3*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

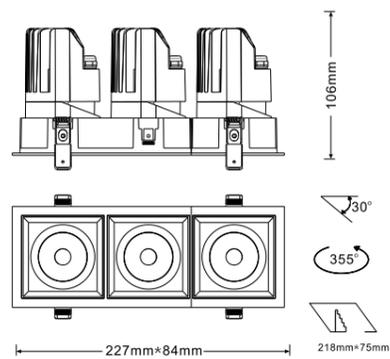

White Black



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

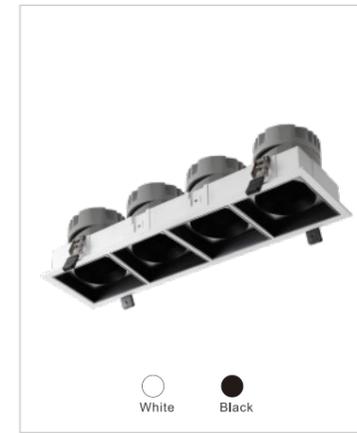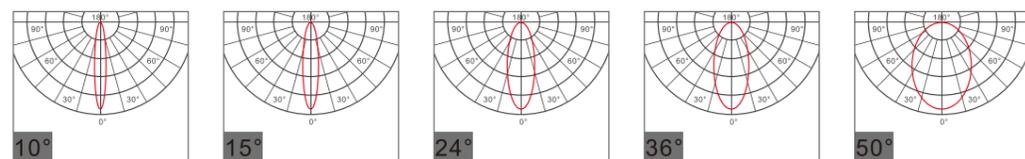


Code No.:DL241-A

Power	MAX 4*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black

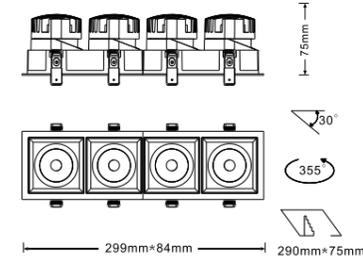



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

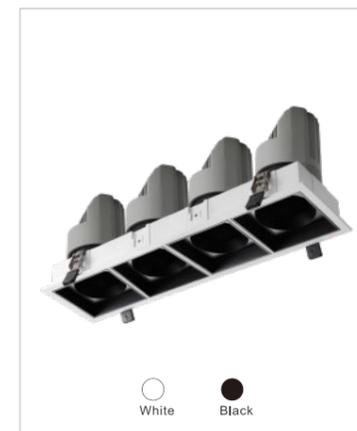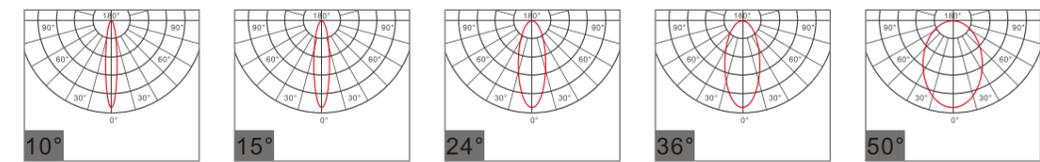


Code No.:DL241-B

Power	MAX 4*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded



White Black

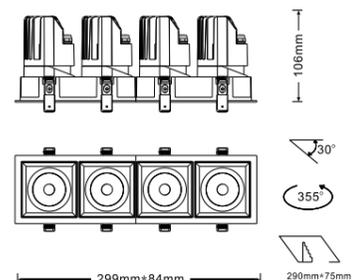


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

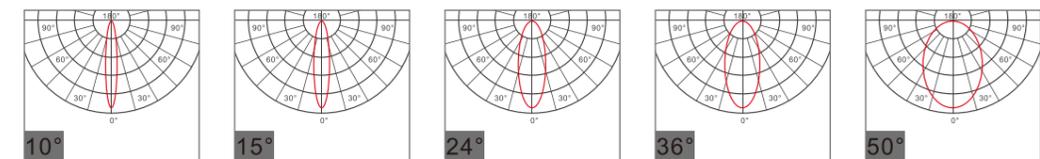




Code No.:DL241S-A

Power	MAX 4*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



75mm



30°

355°



145mm\*145mm

156mm\*156mm

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

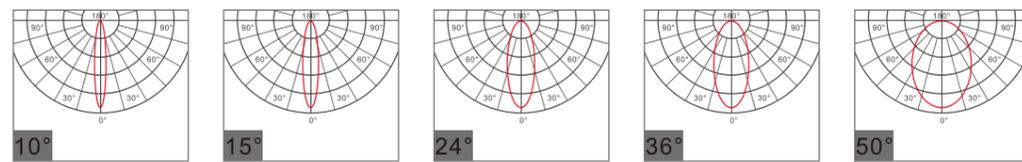


Code No.:DL241S-B

Power	MAX 4*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded



106mm



30°

355°




145mm\*145mm

156mm\*156mm

White Black


Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

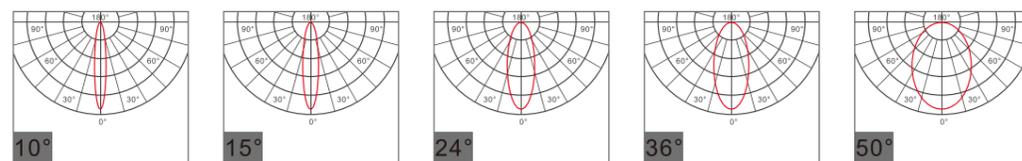

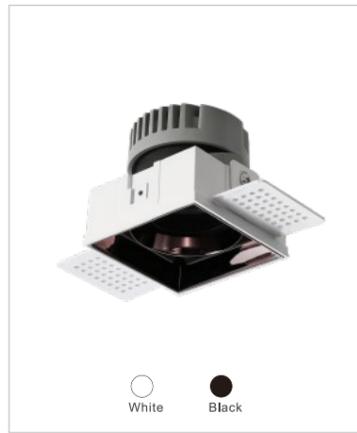

Code No.:DL201SN-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

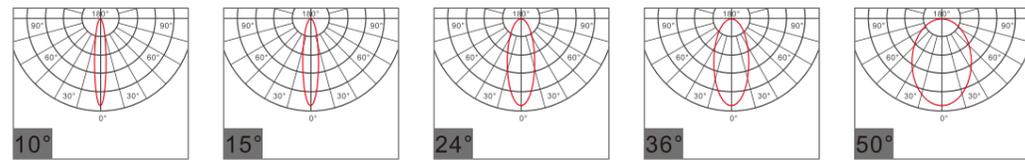

Code No.:DL201SN-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

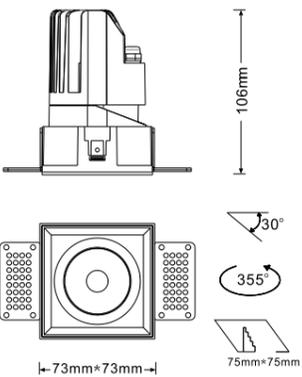

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

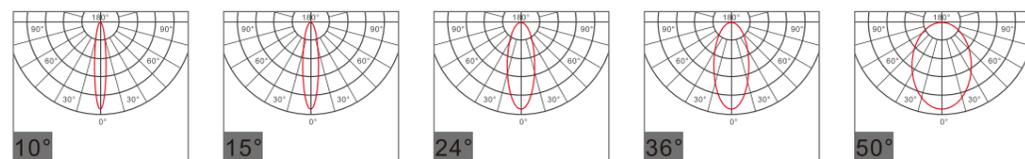


Code No.:DL221N-A

Power	MAX 2*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black

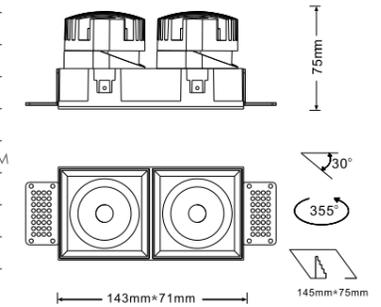


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

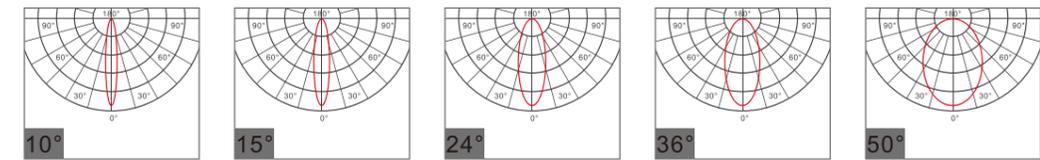


Code No.:DL221N-B

Power	MAX 2*18W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20
Installation	Embedded



White Black

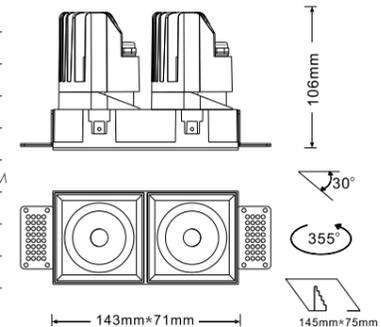


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

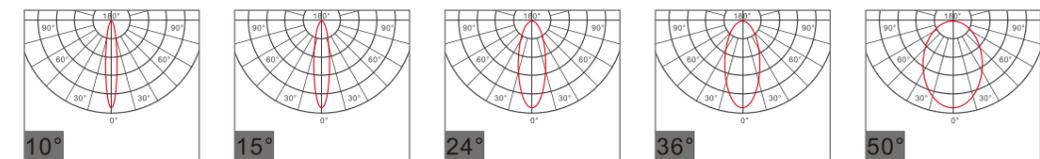




Code No.:DL241SN-A

Power	MAX 4*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



75mm



143mm\*143mm

30°

355°

145mm\*145mm

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

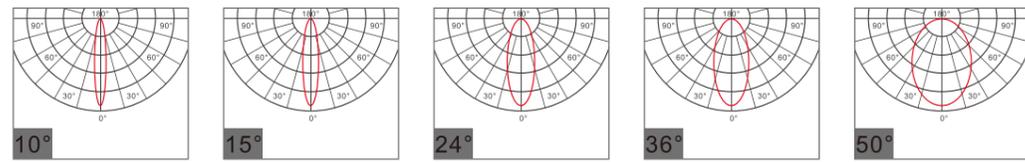


Code No.:DL241SN-B

Power	MAX 4*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded



106mm



143mm\*143mm

30°

355°

145mm\*145mm

White Black


Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

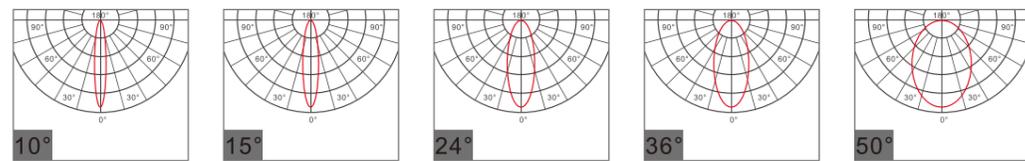

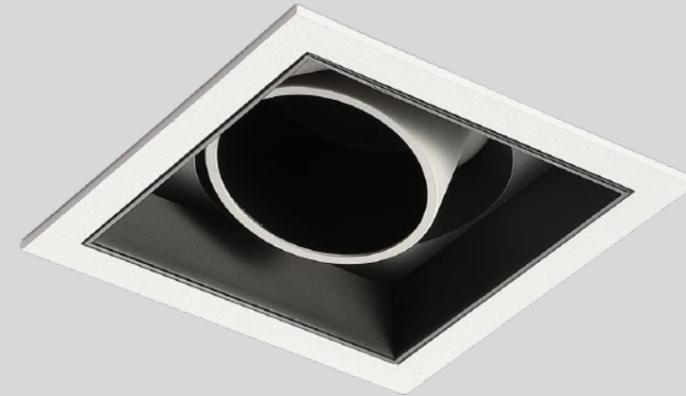

SCR Dimming



0-10V Dimming



DALI Dimming



Bluetooth Dimming




High-power LED  
SDCM<3



CRI>90




Anti-Glare

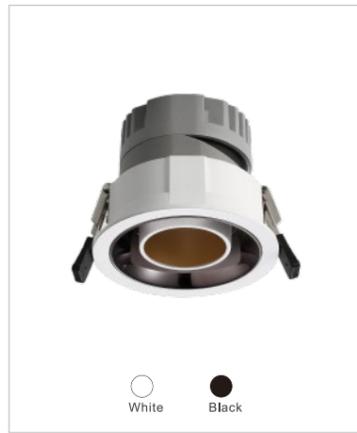


Code No.:DL302-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

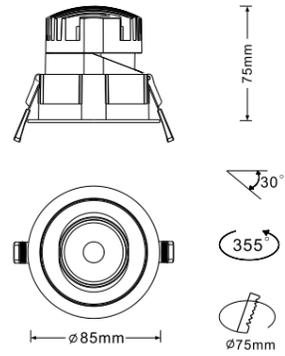

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

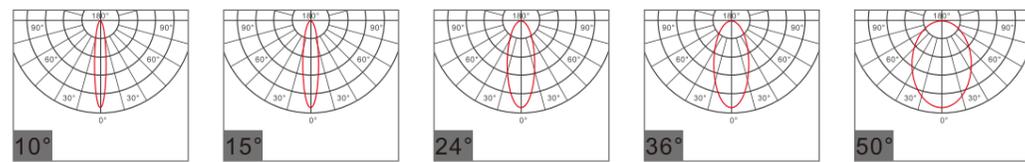


Code No.:DL302-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

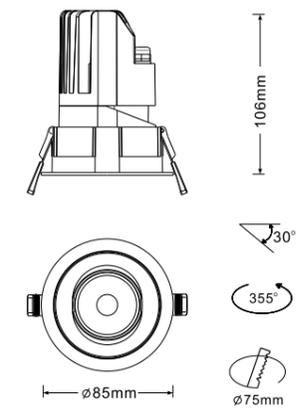

White Black



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

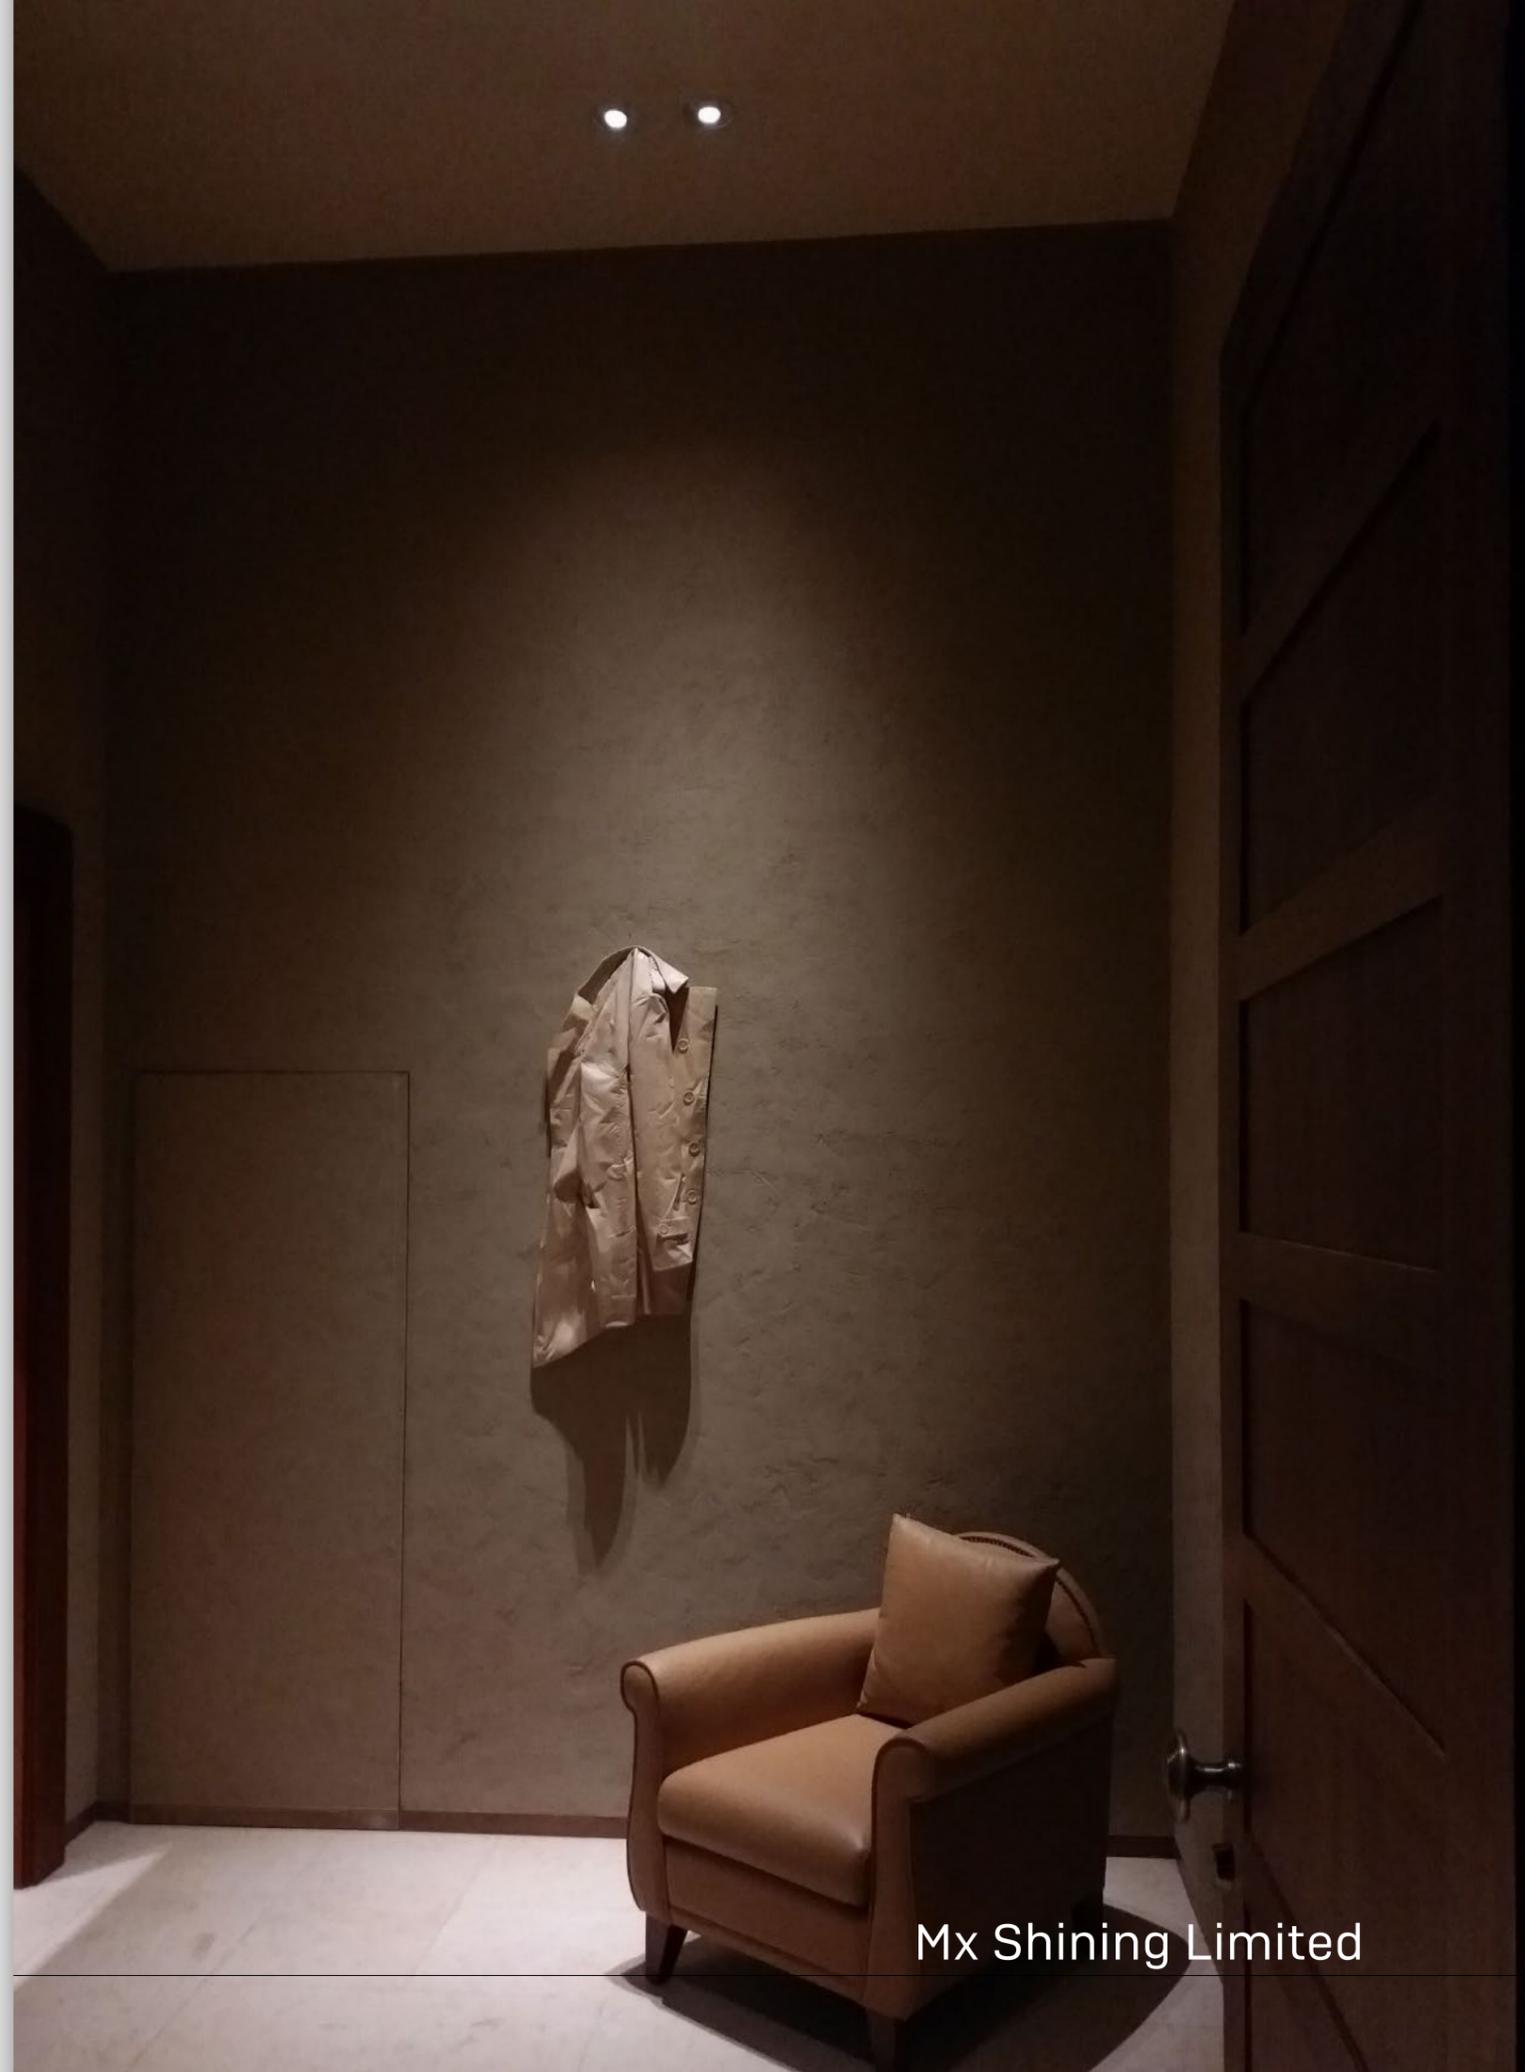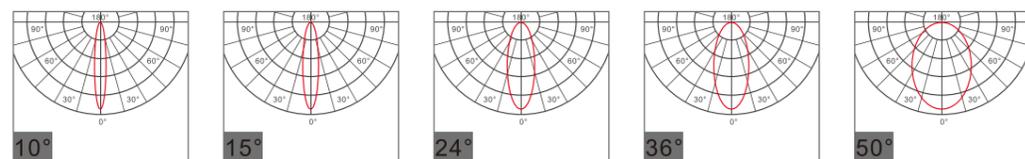


Mx Shining Limited



Code No.:DL302N-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

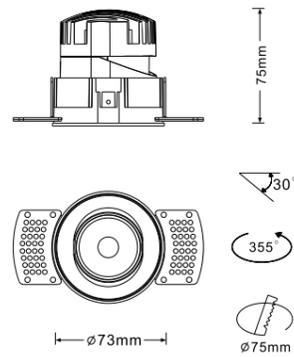

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

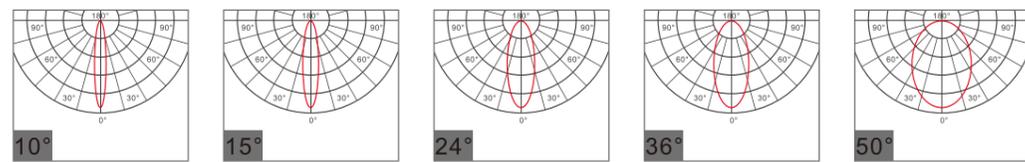


Code No.:DL302S-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

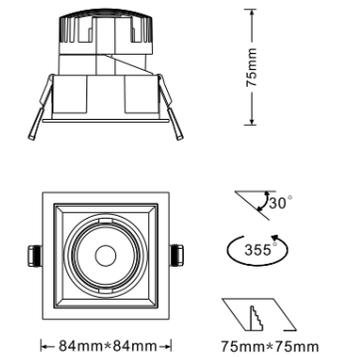

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

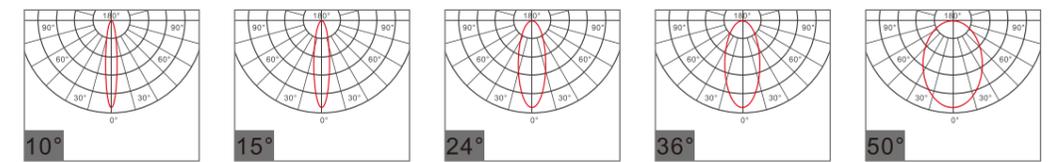


Code No.:DL302N-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

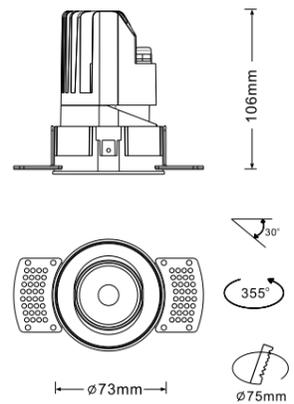

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

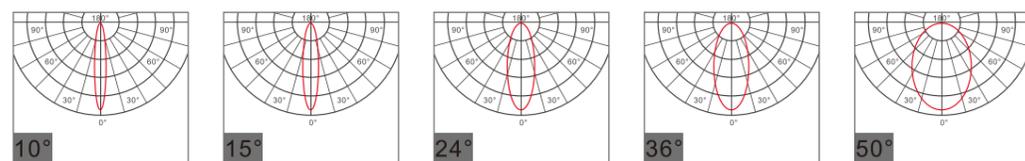


Code No.:DL302S-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

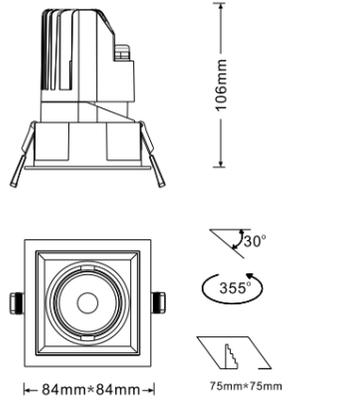

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

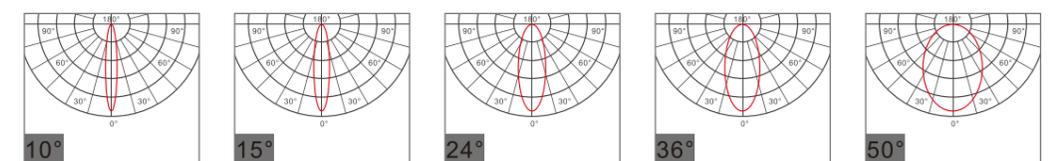



Code No.:DL322-A

Power	MAX 2*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

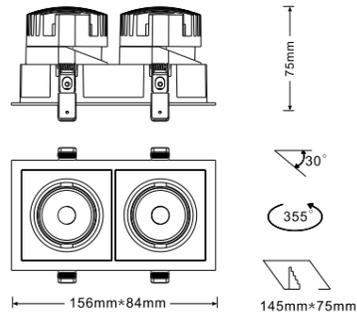


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

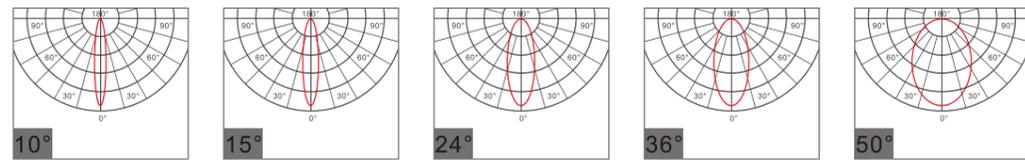


Code No.:DL322-B

Power	MAX 2*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

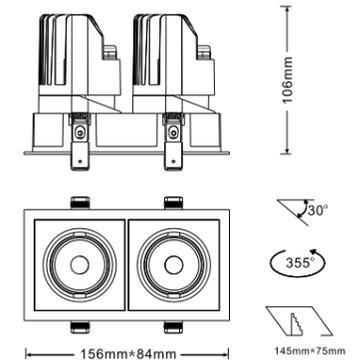



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

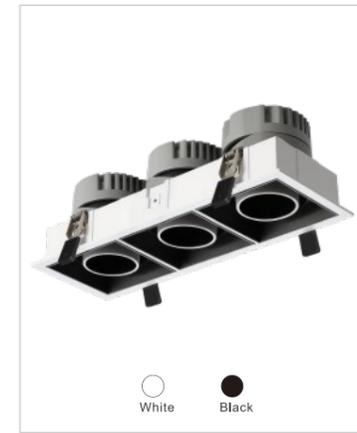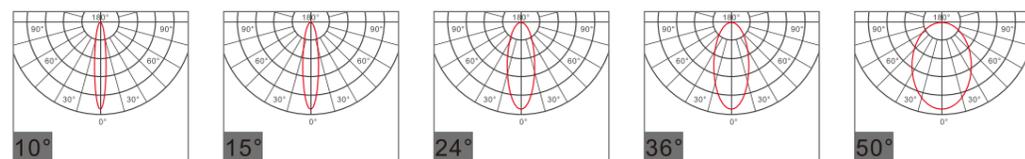

Code No.:DL332-A

Power	MAX 3*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

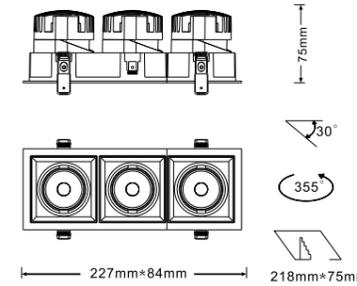



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

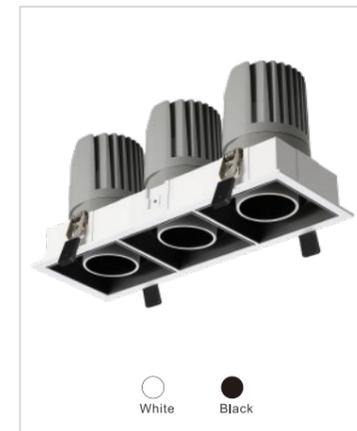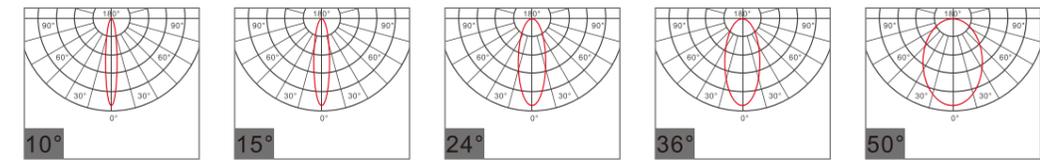

Code No.:DL332-B

Power	MAX 3*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

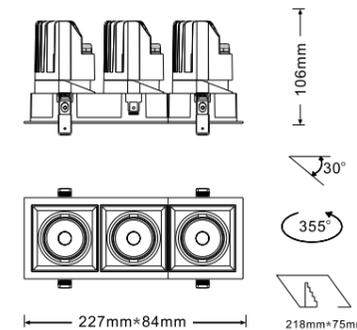


Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K


Angle

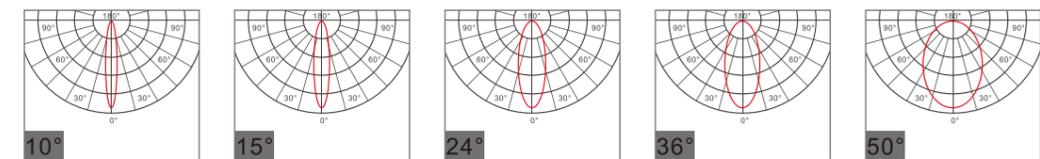

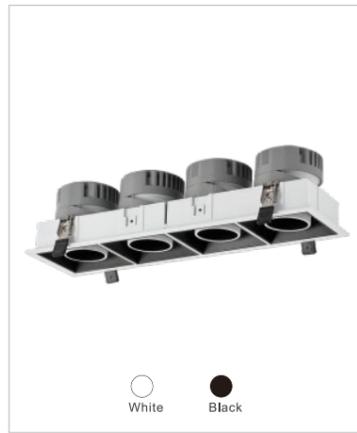


Code No.:DL342-A



Power	MAX 4*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

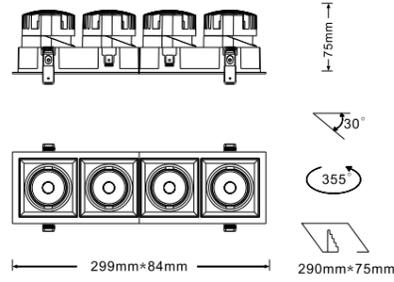

Reflector




Angle

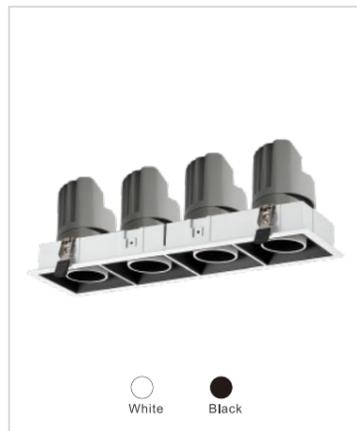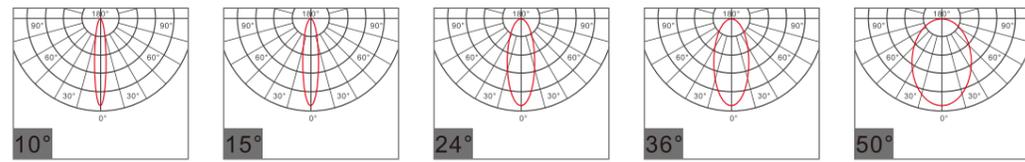


Code No.:DL342-B


Power	MAX 4*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

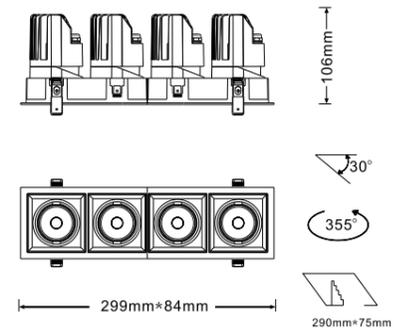

Reflector




Angle

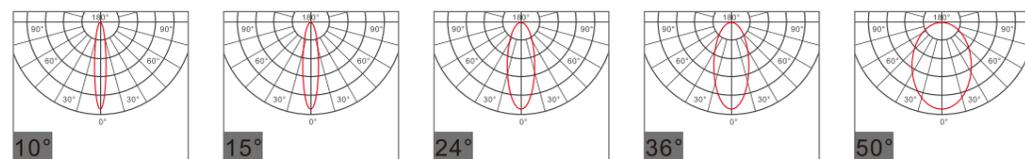


Code No.:DL342S-A


Power	MAX 4*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



Reflector




Angle

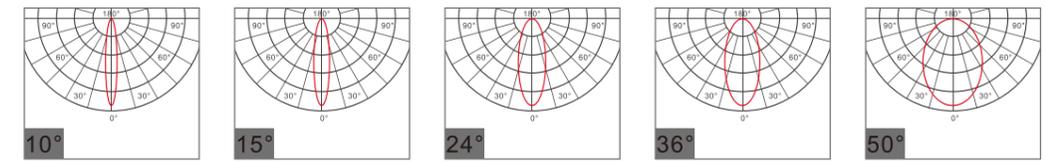

Code No.:DL342S-B


Power	MAX 4*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

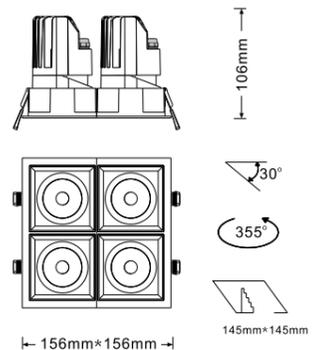

Reflector




Angle

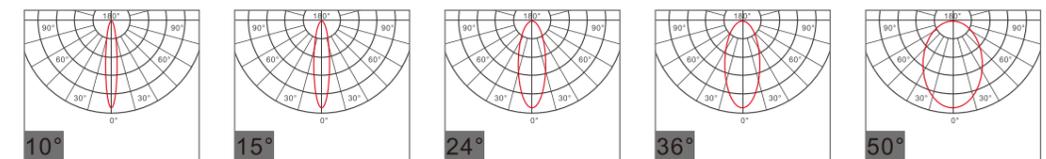



Code No.:DL302SN-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

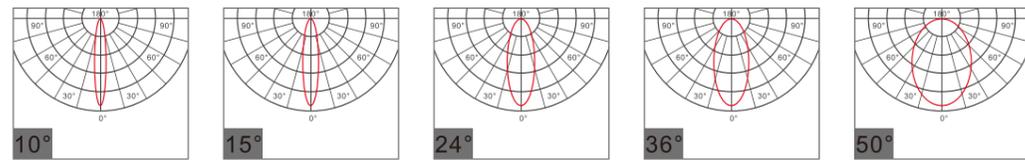

Code No.:DL302SN-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

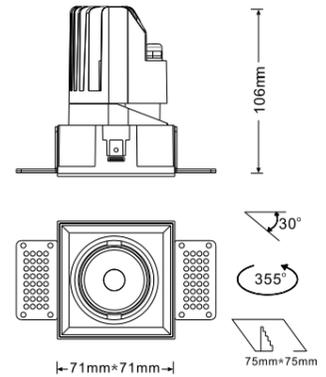

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

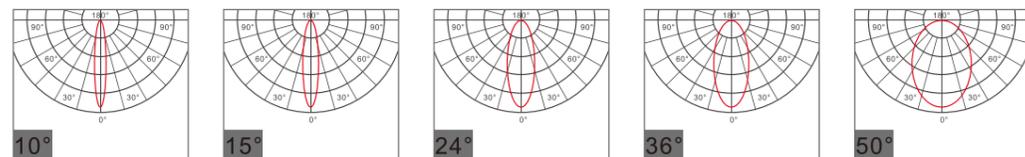

Code No.:DL322N-A

Power	MAX 2*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

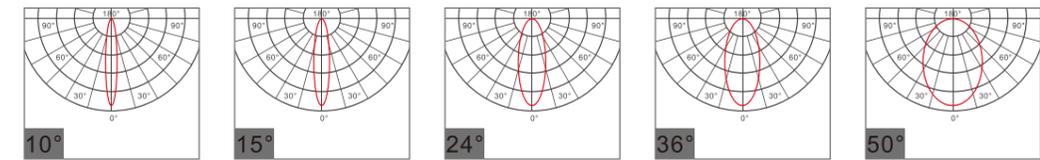

Code No.:DL322N-B

Power	MAX 2*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

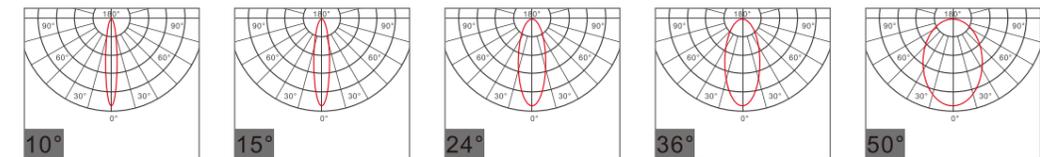




Code No.:DL342SN-A

Power	MAX 4*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



75mm



143mm\*143mm

30°

355°

145mm\*145mm

White Black



Honey Comb Spread Lens Solite Lens

Reflector




Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

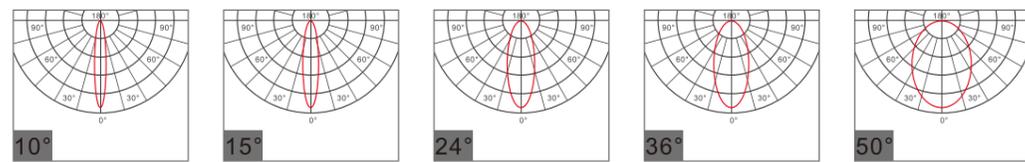


Code No.:DL342SN-B

Power	MAX 4*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded



106mm



143mm\*143mm

30°

355°

145mm\*145mm

White Black



Honey Comb Spread Lens Solite Lens

Reflector




Matt White Matt Black Dark Chrome Matt Silver Chrome Matt Gold



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K

Angle

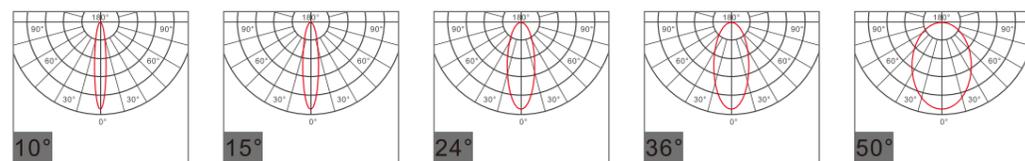

Mx Shining Limited




-  SCR Dimming
-  0-10V Dimming
-  DALI Dimming
-  Bluetooth Dimming
-  High-power LED SDCM<3
-  CRI > 90
-  Anti-Glare



Code No.:DL205-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

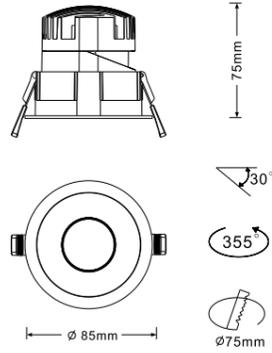

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

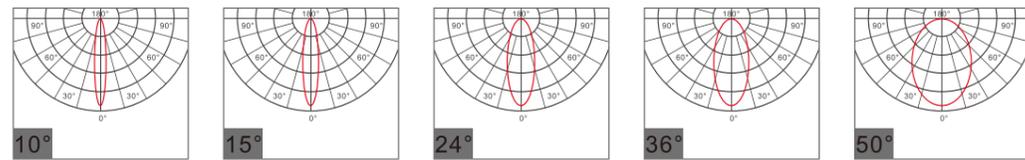

Code No.:DL205N-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

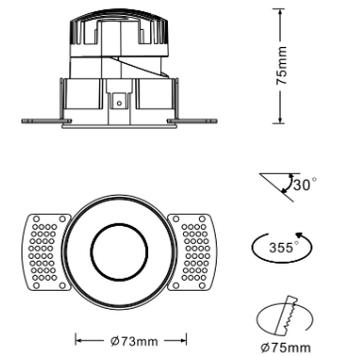

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

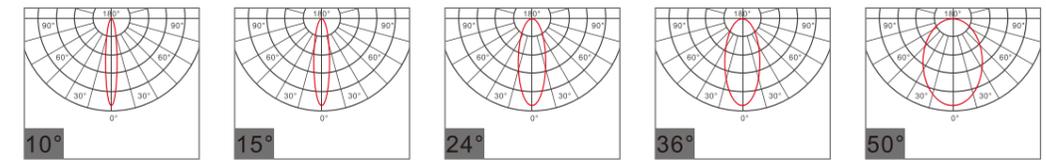

Code No.:DL205-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

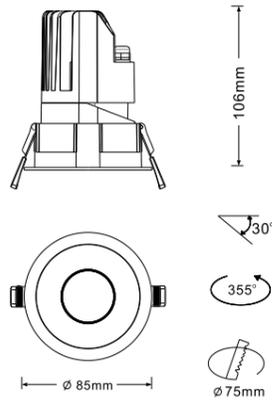

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

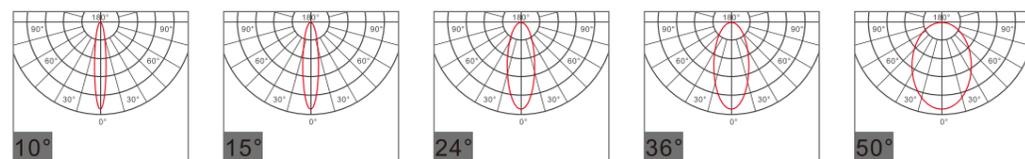


Code No.:DL205N-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

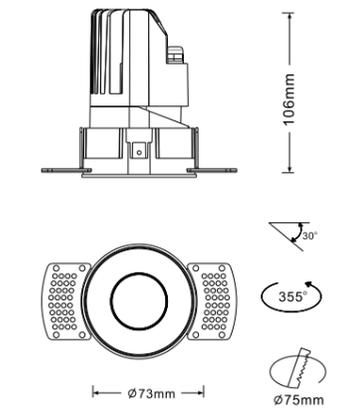

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

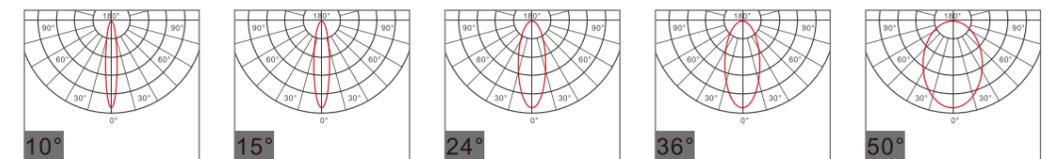




Code No.:DL206-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

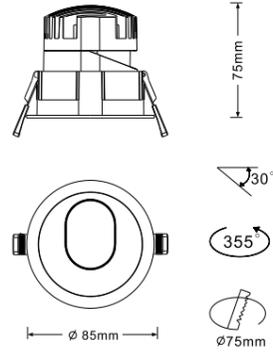


Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

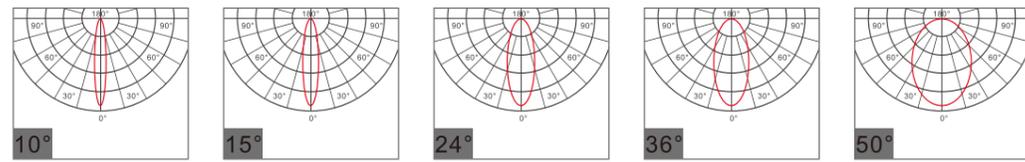

Code No.:DL206-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

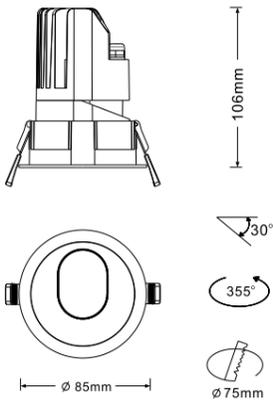


Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

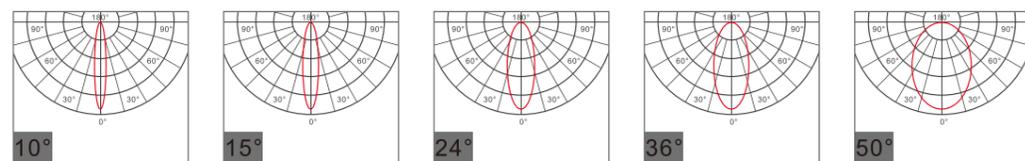


Code No.:DL206N-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

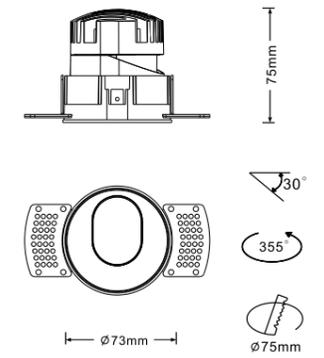


Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

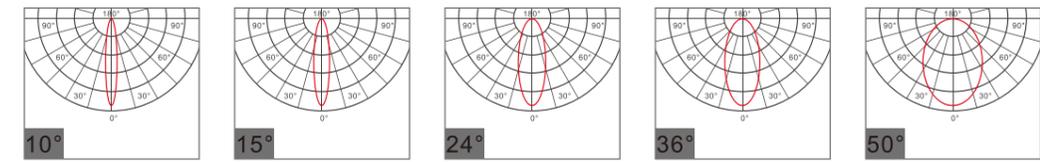


Code No.:DL206N-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

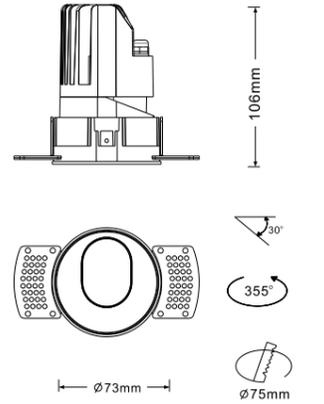


Reflector



2700K / 3000K / 3500K / 4000K / 5000K


Angle

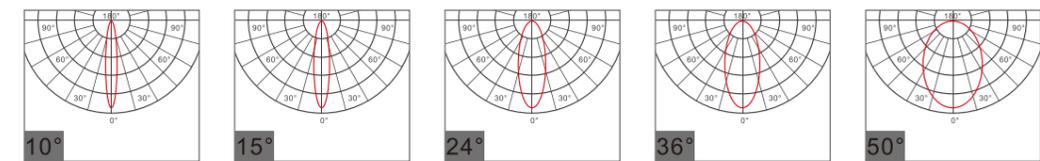



Code No.:DL204-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	polarized
Lumen	605LM
CRI	90/98
IP	20
Installation	Embedded

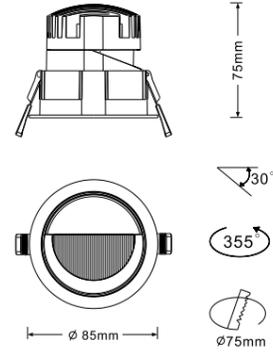

White Black

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K



Code No.:DL204N-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	polarized
Lumen	605LM
CRI	90/98
IP	20
Installation	Embedded

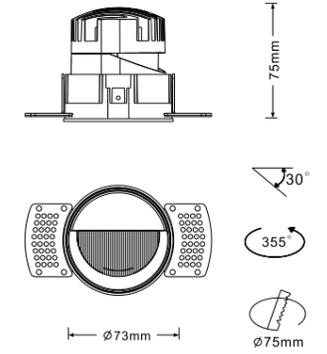

White Black

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K



Code No.:DL204-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	polarized
Lumen	902LM
CRI	90/98
IP	20/54
Installation	Embedded

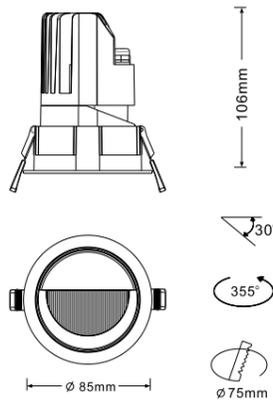

White Black

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K




Code No.:DL204N-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	polarized
Lumen	902LM
CRI	90/98
IP	20/54
Installation	Embedded

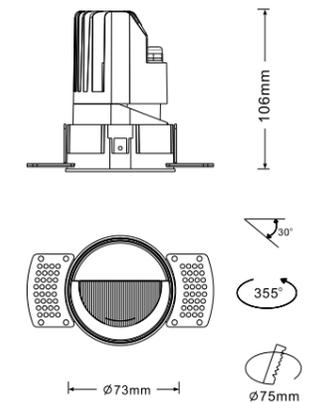

White Black

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K



Code No.:DL207S-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded





Reflector




PHILIPS LUMINUS CITIZEN CREE® bridgelux.  
2700K / 3000K / 3500K / 4000K / 5000K

Angle

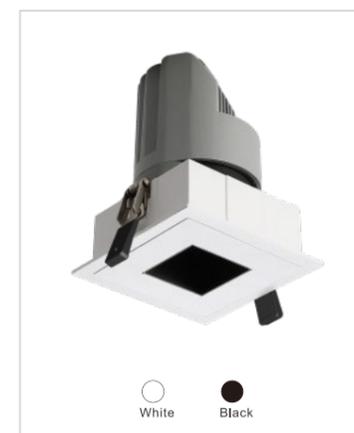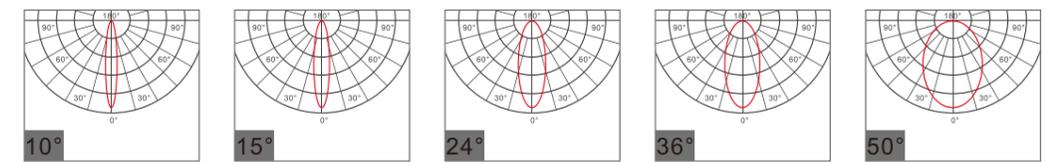

Code No.:DL207S-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

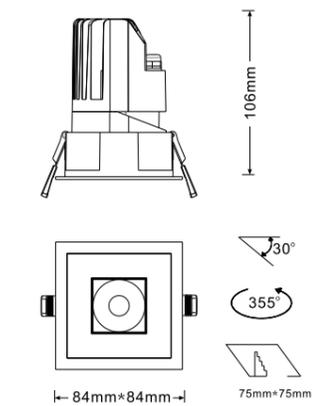


Reflector



PHILIPS LUMINUS CITIZEN CREE® bridgelux.  
2700K / 3000K / 3500K / 4000K / 5000K

Angle

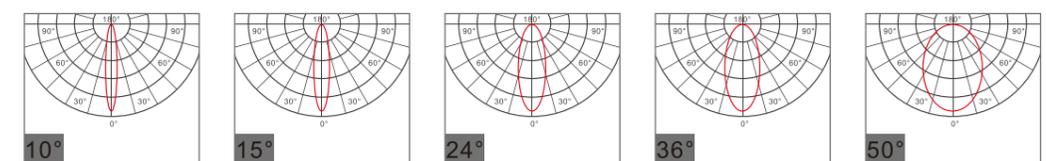


Mx Shining Limited




Code No.:DL207SN-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded




Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

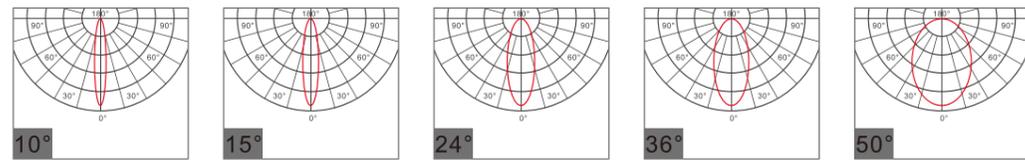


Code No.:DL207SN-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

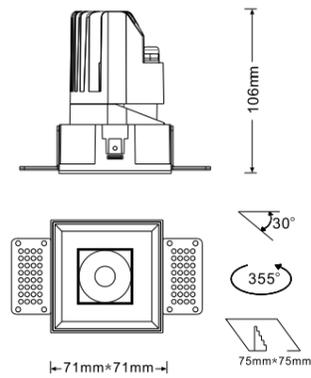


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

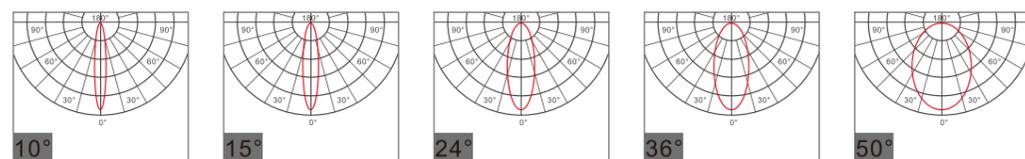

Code No.:DL227-A

Power	MAX 2*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

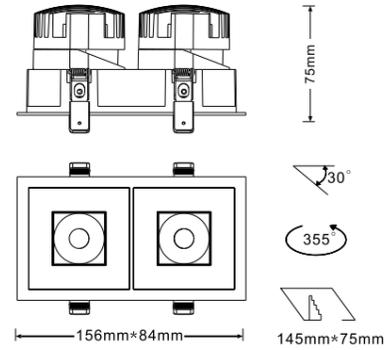


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

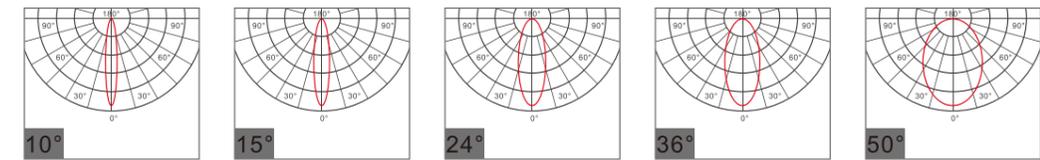

Code No.:DL227-B

Power	MAX 2*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

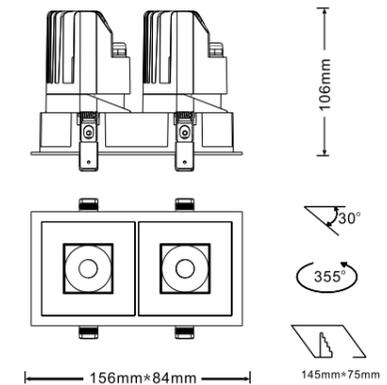


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

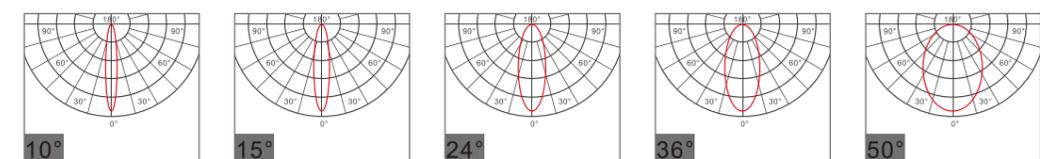



Code No.:DL227N-A

Power	MAX 2*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

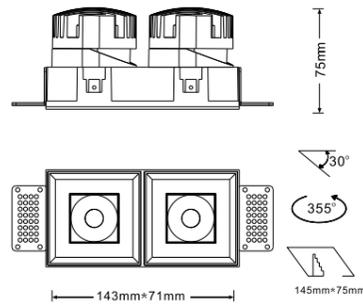

White Black



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

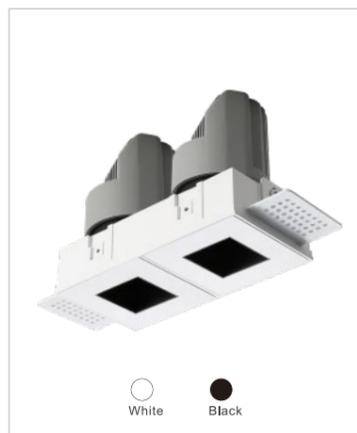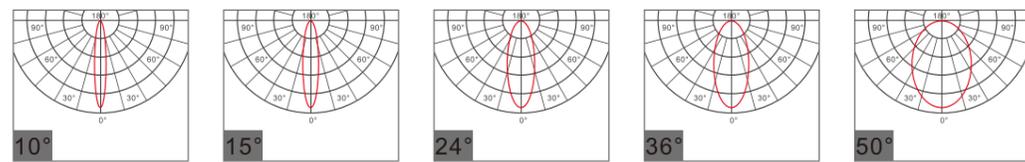

Code No.:DL227N-B

Power	MAX 2*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

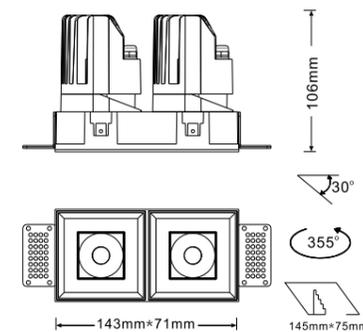

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

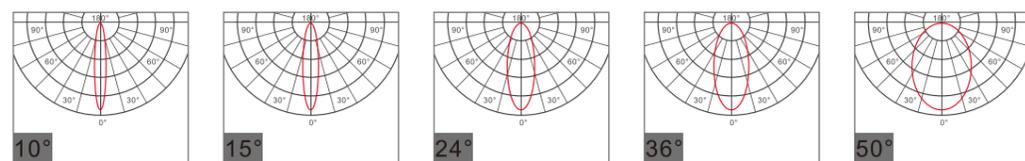

Code No.:DL237-A

Power	MAX 3*12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded

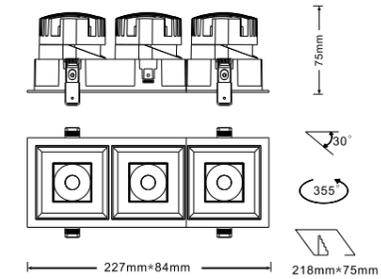

White Black



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

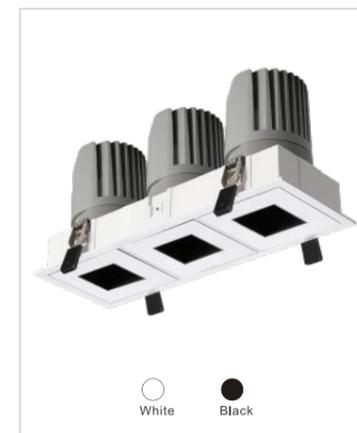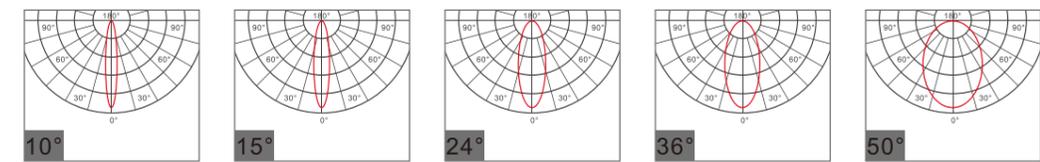

Code No.:DL237-B

Power	MAX 3*18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

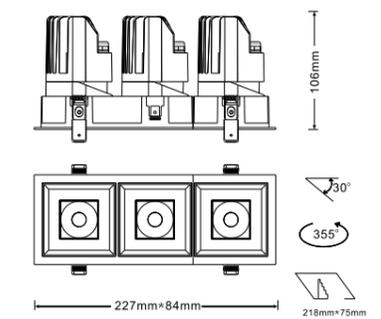

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

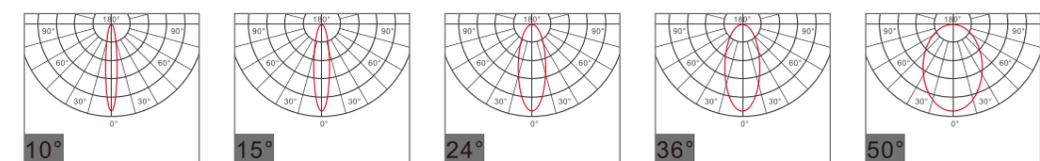



SCR Dimming



0-10V Dimming




DALI Dimming



Bluetooth Dimming




High-power LED  
SDCM<3



CRI ≥ 90




Anti-Glare

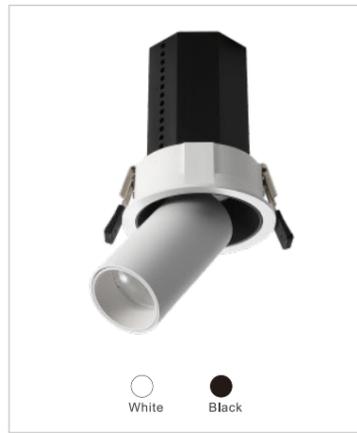

Code No.:DL403

Power	MAX 10W					
Voltage	AC 220~240V					
Current	3W 700mA		10W 250mA			
Angle	3°	7°	15°	24°	36°	60°
Lumen	342LM	379LM	803LM	838LM	850LM	591LM
CRI	90/98					
IP	20					
Installation	Embedded					

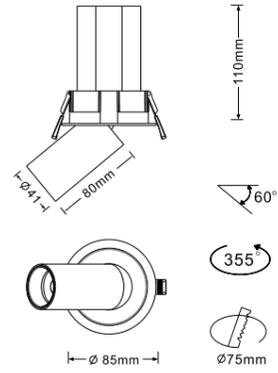


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

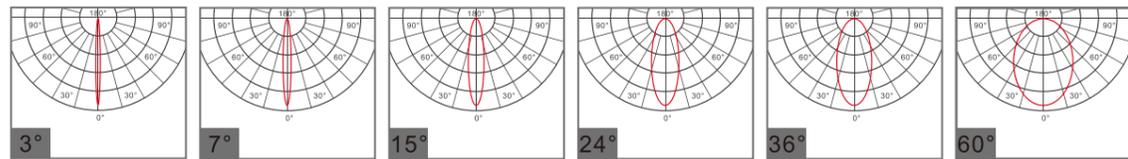

Code No.:DL403N

Power	MAX 10W					
Voltage	AC 220~240V					
Current	3W 700mA		10W 250mA			
Angle	3°	7°	15°	24°	36°	60°
Lumen	342LM	379LM	803LM	838LM	850LM	591LM
CRI	90/98					
IP	20					
Installation	Embedded					

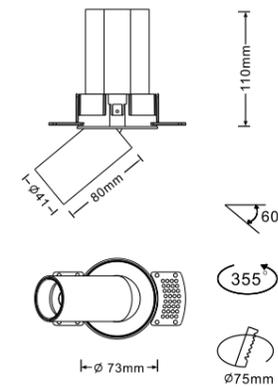


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

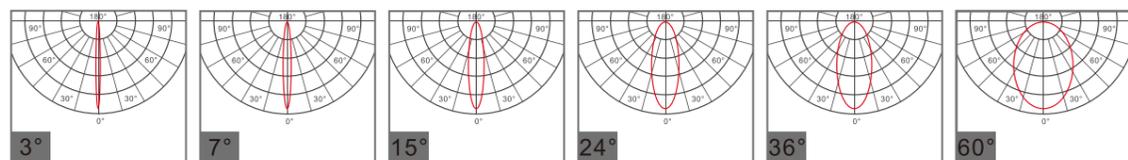



Code No.:DL403S

Power	MAX 10W	
Voltage	AC 220~240V	
Current	3W 700mA	10W 250mA
Angle	3° 7° 15° 24° 36° 60°	
Lumen	342LM 379LM 803LM 838LM 850LM 591LM	
CRI	90/98	
IP	20	
Installation	Embedded	

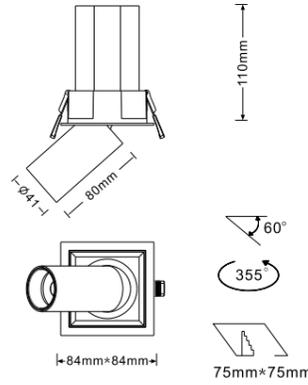


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

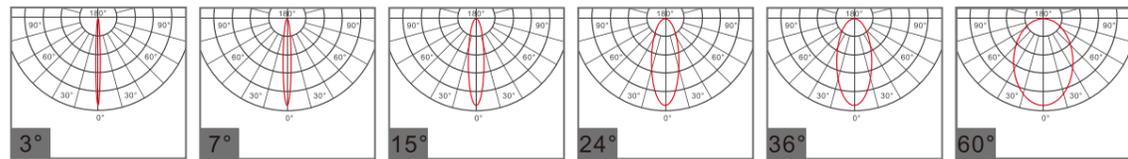


Code No.:DL403SN

Power	MAX 10W	
Voltage	AC 220~240V	
Current	3W 700mA	10W 250mA
Angle	3° 7° 15° 24° 36° 60°	
Lumen	342LM 379LM 803LM 838LM 850LM 591LM	
CRI	90/98	
IP	20	
Installation	Embedded	

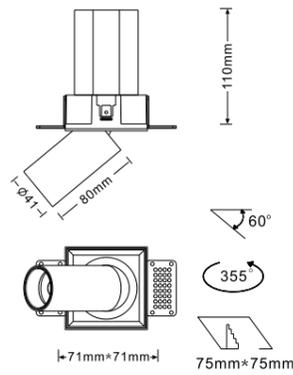


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

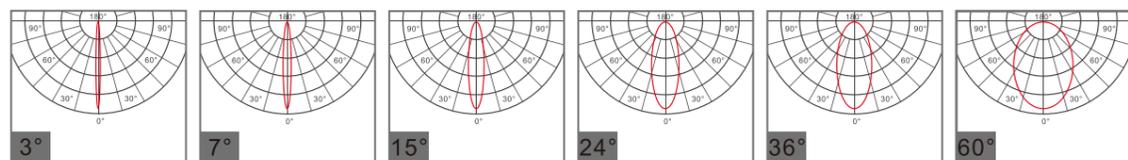

Code No.:DL423

Power	MAX 2*10W	
Voltage	AC 220~240V	
Current	3W 700mA	10W 250mA
Angle	3° 7° 15° 24° 36° 60°	
Lumen	342LM 379LM 803LM 838LM 850LM 591LM	
CRI	90/98	
IP	20	
Installation	Embedded	

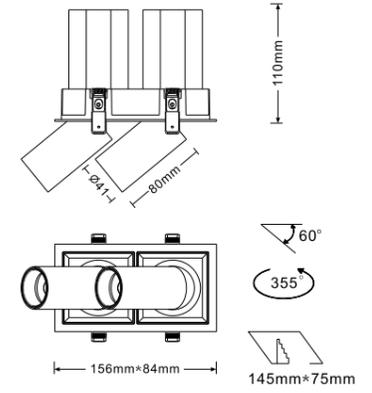


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

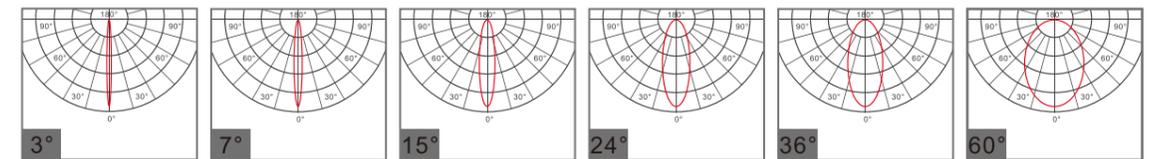


Code No.:DL423N

Power	MAX 2*10W	
Voltage	AC 220~240V	
Current	3W 700mA	10W 250mA
Angle	3° 7° 15° 24° 36° 60°	
Lumen	342LM 379LM 803LM 838LM 850LM 591LM	
CRI	90/98	
IP	20	
Installation	Embedded	

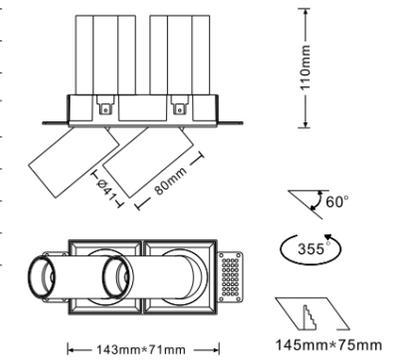


Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

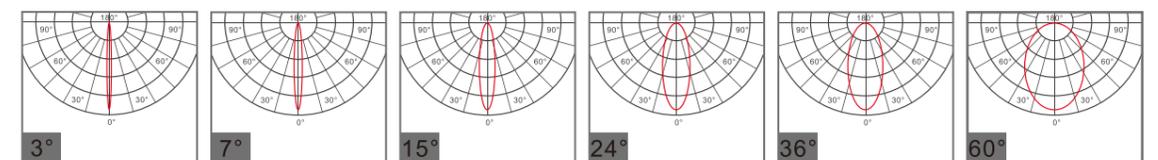

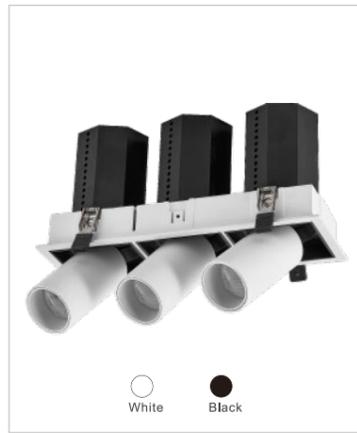

Code No.:DL433

Power	MAX 3*10W	
Voltage	AC 220~240V	
Current	3W 700mA	10W 250mA
Angle	3° 7° 15° 24° 36° 60°	
Lumen	342LM 379LM 803LM 838LM 850LM 591LM	
CRI	90/98	
IP	20	
Installation	Embedded	

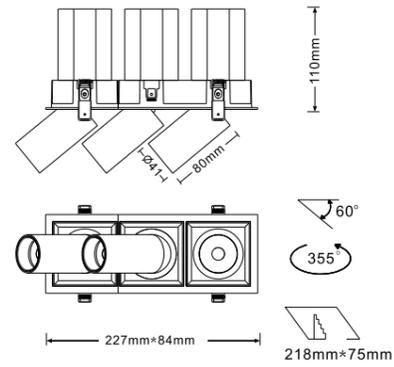



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

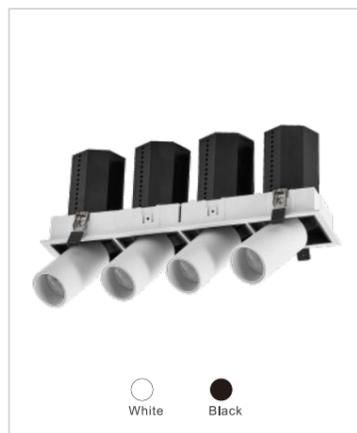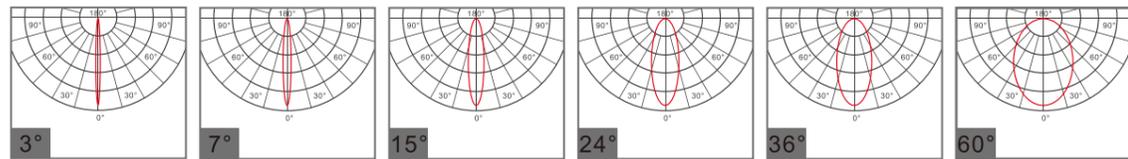

Code No.:DL443

Power	MAX 4*10W	
Voltage	AC 220~240V	
Current	3W 700mA	10W 250mA
Angle	3° 7° 15° 24° 36° 60°	
Lumen	342LM 379LM 803LM 838LM 850LM 591LM	
CRI	90/98	
IP	20	
Installation	Embedded	

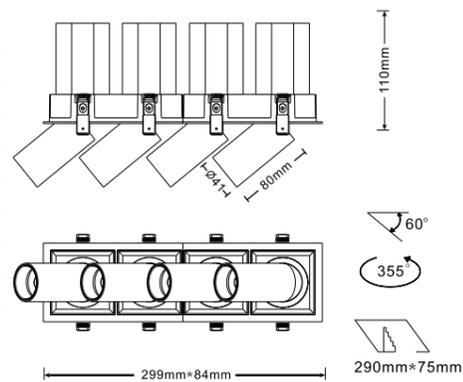


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

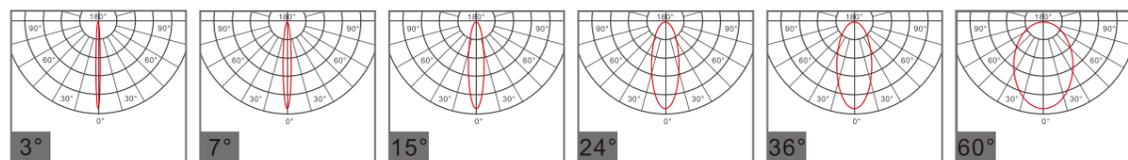

Code No.:DL443S

Power	MAX 4*10W	
Voltage	AC 220~240V	
Current	3W 700mA	10W 250mA
Angle	3° 7° 15° 24° 36° 60°	
Lumen	342LM 379LM 803LM 838LM 850LM 591LM	
CRI	90/98	
IP	20	
Installation	Embedded	

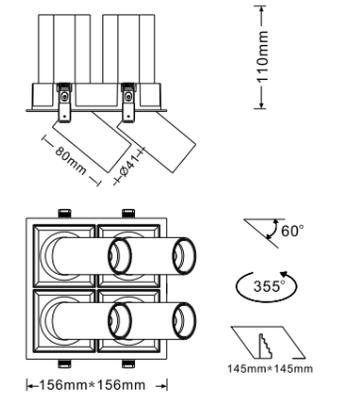


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

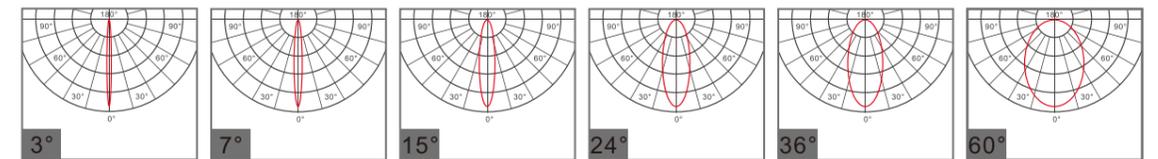


Code No.:DL443SN

Power	MAX 4*10W	
Voltage	AC 220~240V	
Current	3W 700mA	10W 250mA
Angle	3° 7° 15° 24° 36° 60°	
Lumen	342LM 379LM 803LM 838LM 850LM 591LM	
CRI	90/98	
IP	20	
Installation	Embedded	

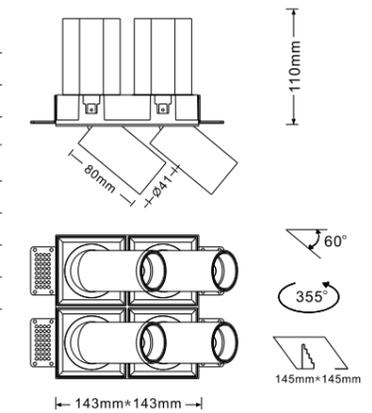


Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

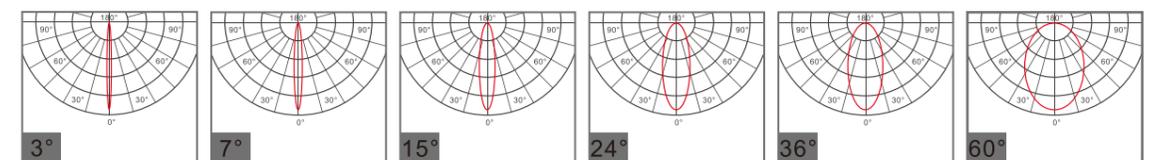


SHUANGPIN

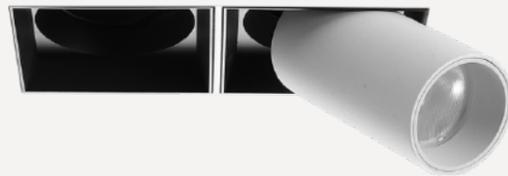

THREE PINS




THREE PINS

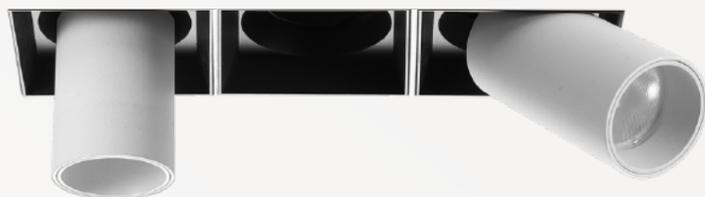

FOUR PINS



SCR Dimming



0-10V Dimming



DALI Dimming



Bluetooth Dimming



High-power LED SDCM<3




CRI >= 90



Anti-Glare


Code No.:DL228

Power	MAX 2*10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			

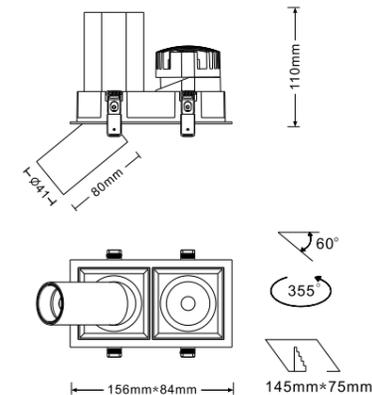


White Black

Reflector




Angle

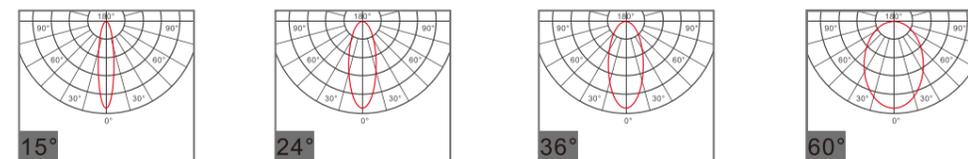


Code No.:DL228N

Power	MAX 2*10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	678LM	694LM	715LM	740LM
CRI	90/98			
IP	20			
Installation	Embedded			

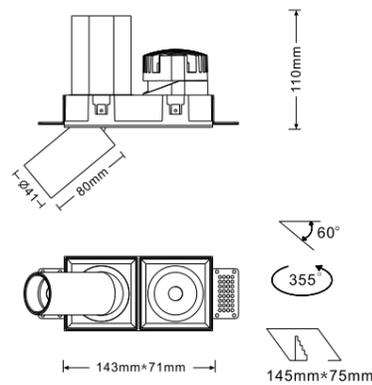


White Black

Reflector



Angle

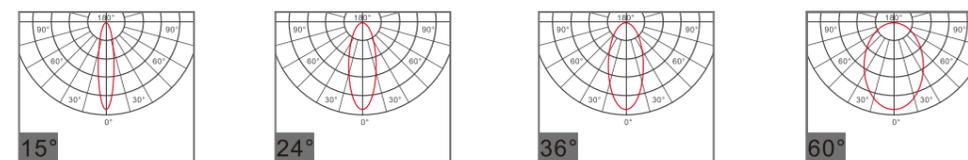


Mx Shining Limited




Code No.:DL238

Power	MAX 3*10W
Voltage	AC 220~240V
Current	250mA
Angle	15° 24° 36° 60°
Lumen	678LM 694LM 715LM 740LM
CRI	90/98
IP	20
Installation	Embedded

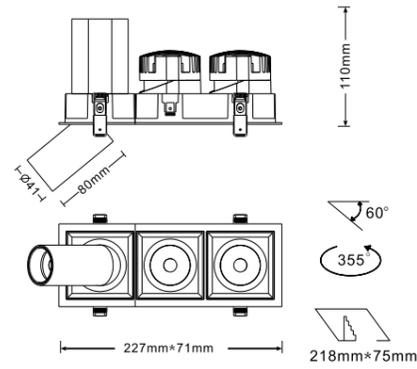


White Black

Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

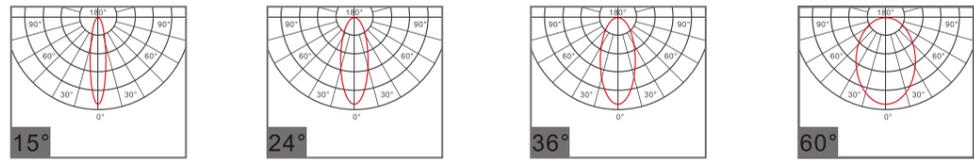


Code No.:DL238D

Power	MAX 3*10W
Voltage	AC 220~240V
Current	250mA
Angle	15° 24° 36° 60°
Lumen	678LM 694LM 715LM 740LM
CRI	90/98
IP	20
Installation	Embedded

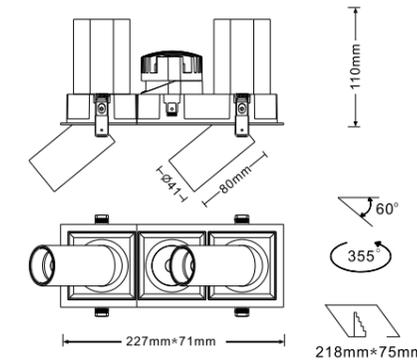



White Black

Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

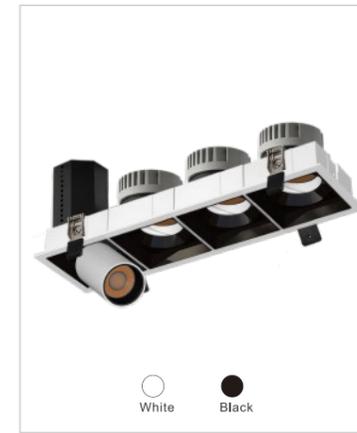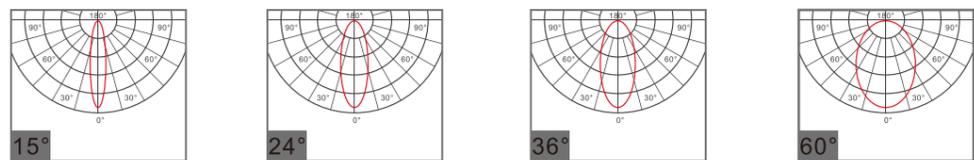


Code No.:DL248

Power	MAX 4*10W
Voltage	AC 220~240V
Current	250mA
Angle	15° 24° 36° 60°
Lumen	678LM 694LM 715LM 740LM
CRI	90/98
IP	20
Installation	Embedded

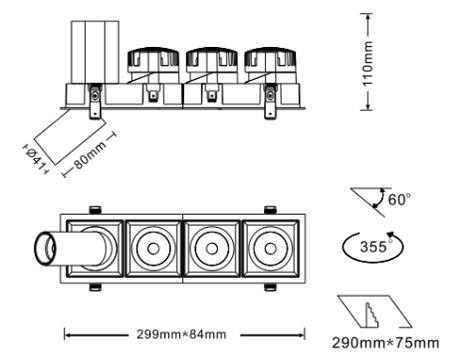


White Black

Reflector




2700K / 3000K / 3500K / 4000K / 5000K

Angle

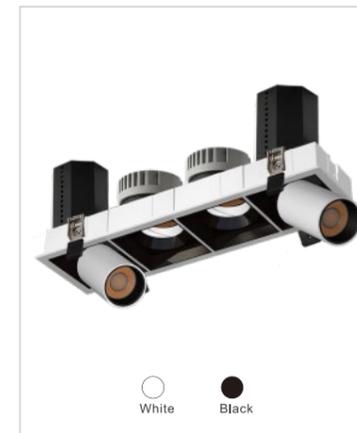


Code No.:DL248D

Power	MAX 4*10W
Voltage	AC 220~240V
Current	250mA
Angle	15° 24° 36° 60°
Lumen	678LM 694LM 715LM 740LM
CRI	90/98
IP	20
Installation	Embedded

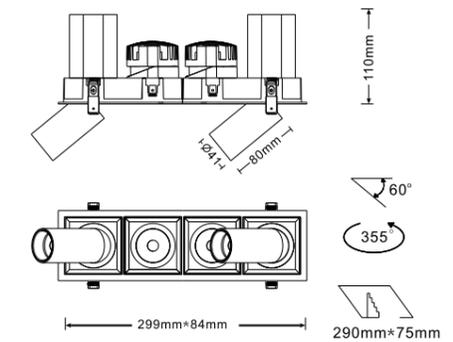


White Black


Reflector



2700K / 3000K / 3500K / 4000K / 5000K

Angle

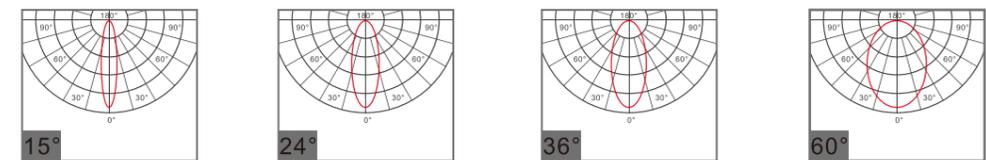

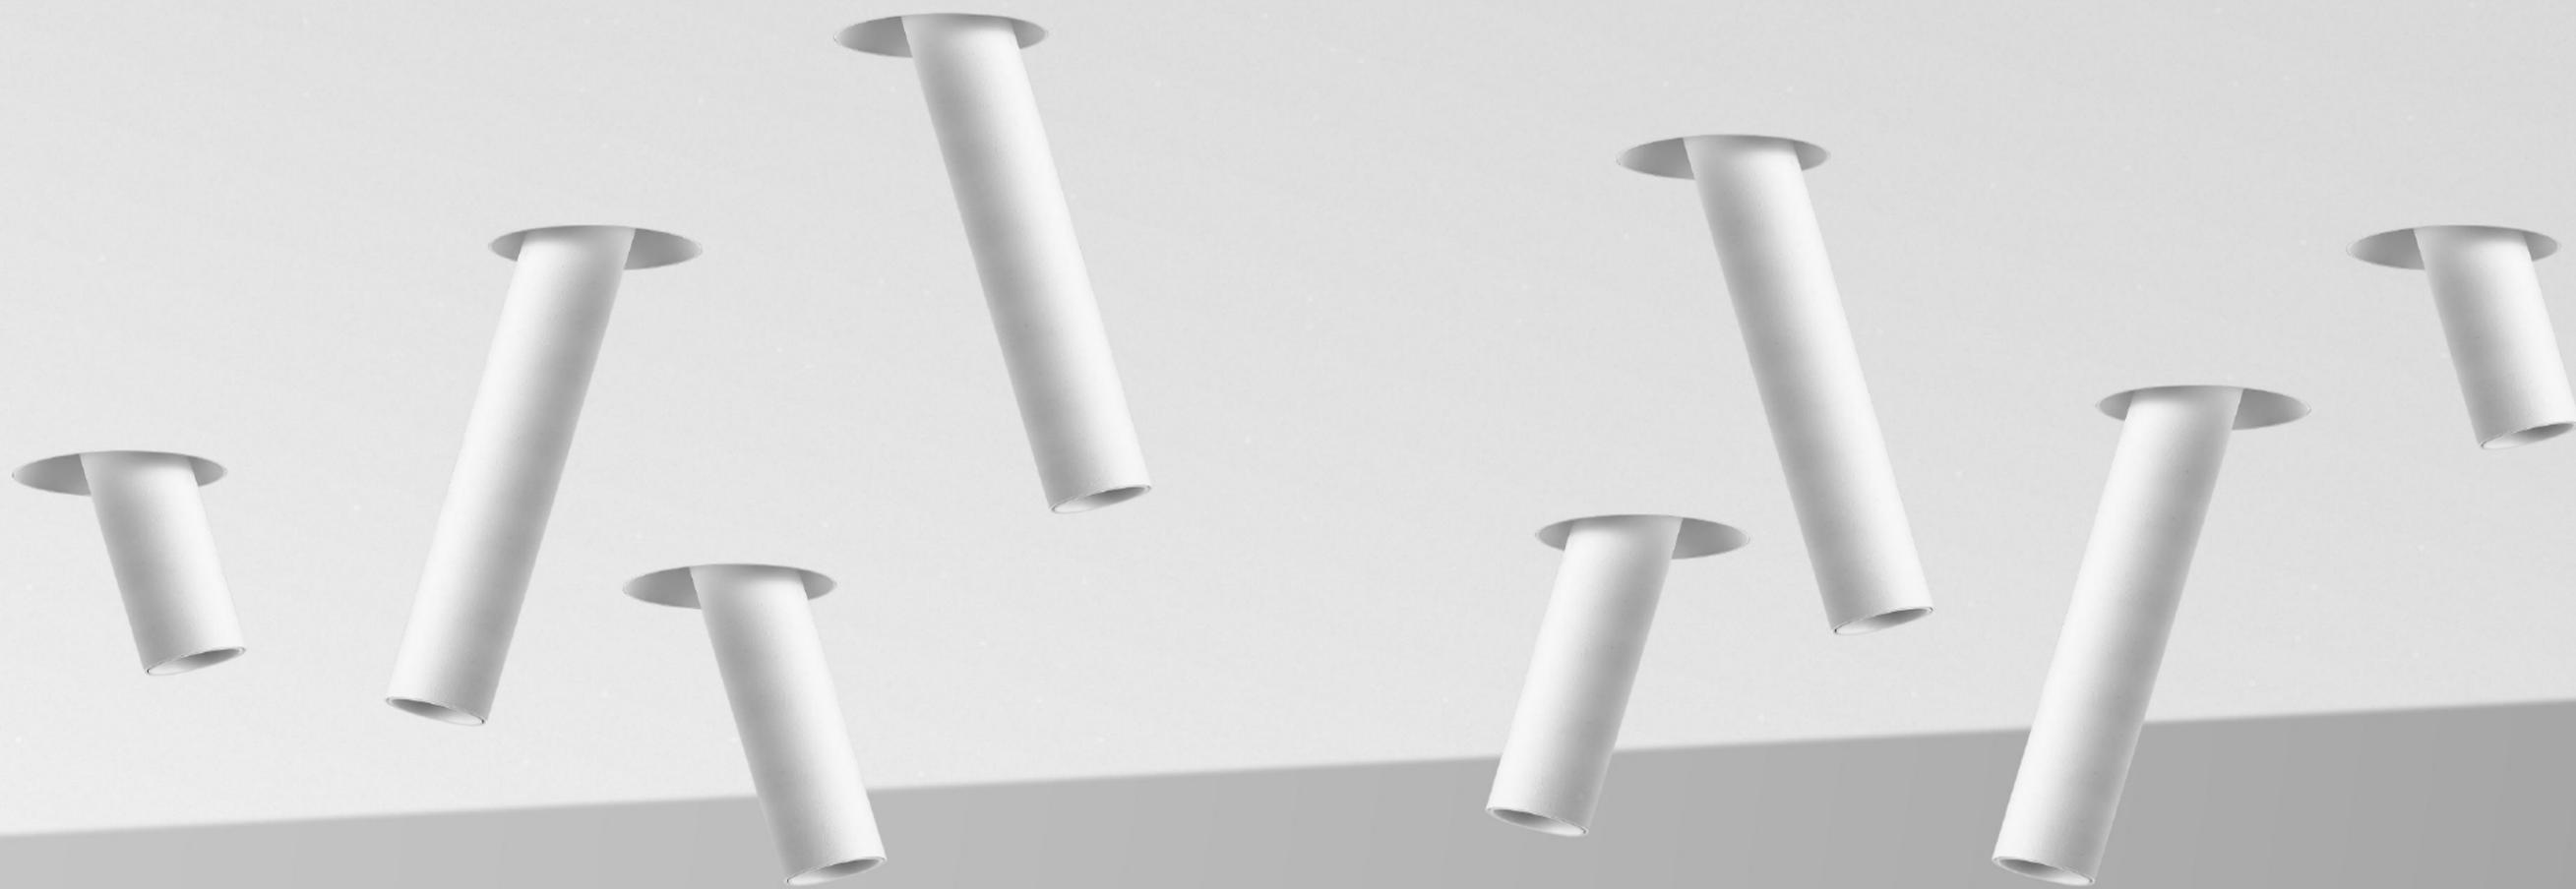

SCR Dimming



0-10V Dimming



DALI Dimming



Bluetooth Dimming



High-power LED  
SDCM<3



CRI>90




Anti-Glare



Code No.:DL203

Power	MAX 10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	803LM	838LM	850LM	591LM
CRI	90/98			
IP	20			
Installation	Embedded			




White Black

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux  
2700K / 3000K / 3500K / 4000K / 5000K

Angle

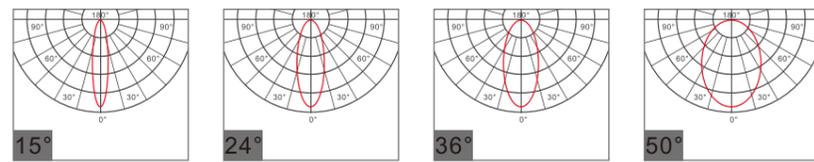


Code No.:DL203S

Power	MAX 10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	803LM	838LM	850LM	591LM
CRI	90/98			
IP	20			
Installation	Embedded			

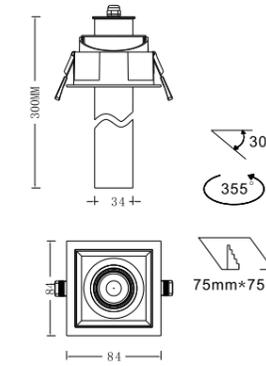


White Black

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux  
2700K / 3000K / 3500K / 4000K / 5000K

Angle

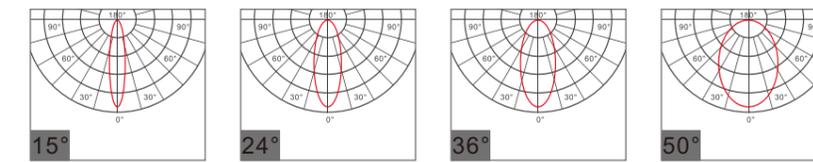


Code No.:DL203N

Power	MAX 10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	803LM	838LM	850LM	591LM
CRI	90/98			
IP	20			
Installation	Embedded			




White Black

Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux  
2700K / 3000K / 3500K / 4000K / 5000K

Angle

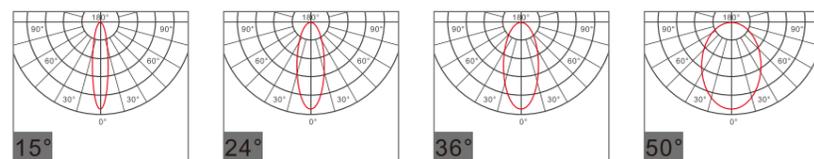


Code No.:DL203SN

Power	MAX 10W			
Voltage	AC 220~240V			
Current	250mA			
Angle	15°	24°	36°	60°
Lumen	803LM	838LM	850LM	591LM
CRI	90/98			
IP	20			
Installation	Embedded			

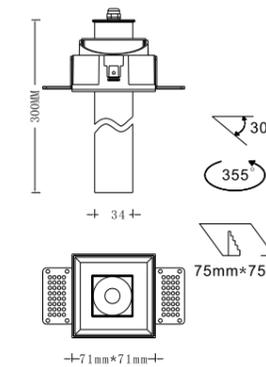


White Black

Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux  
2700K / 3000K / 3500K / 4000K / 5000K

Angle

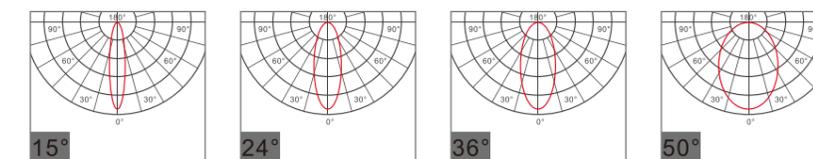



-  SCR Dimming
-  0-10V Dimming
-  DALI Dimming
-  Bluetooth Dimming
-  High-power LED SDCM<3
-  CRI>90
-  Anti-Glare




Mx Shining Limited



Code No.:DL509-A

Power	MAX 8W
Voltage	AC 220~240V
Current	200mA
Angle	10° 15° 24° 36° 50°
Lumen	525LM 642LM 670LM 680LM 473LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

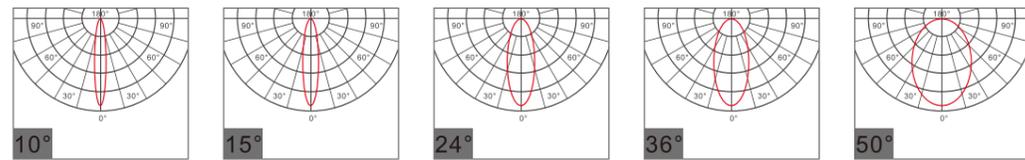


Code No.:DL509-B

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

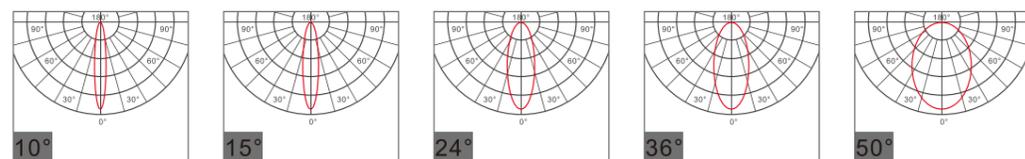

Code No.:DL509A-A

Power	MAX 8W
Voltage	AC 220~240V
Current	200mA
Angle	10° 15° 24° 36° 50°
Lumen	525LM 642LM 670LM 680LM 473LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

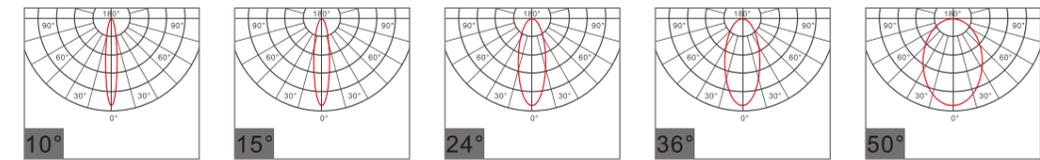


Code No.:DL509A-B

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K


Angle

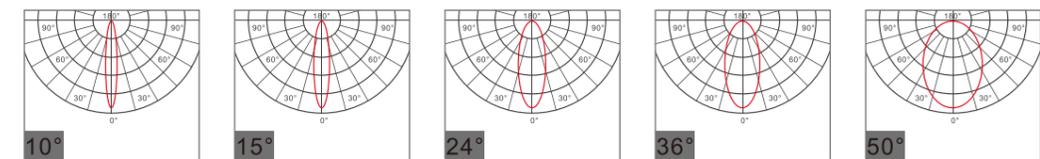



Code No.:DL509C-A

Power	MAX 8W
Voltage	AC 220~240V
Current	200mA
Angle	10° 15° 24° 36° 50°
Lumen	525LM 642LM 670LM 680LM 473LM
CRI	90/98
IP	20
Installation	Embedded



White Black




Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

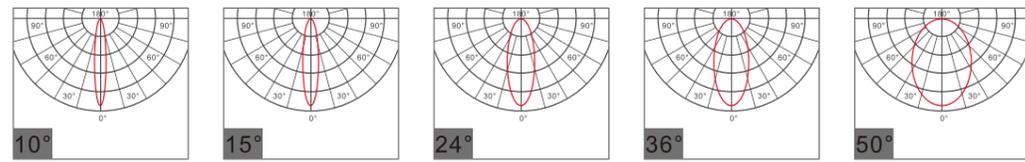

Code No.:DL509C-B

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black




Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

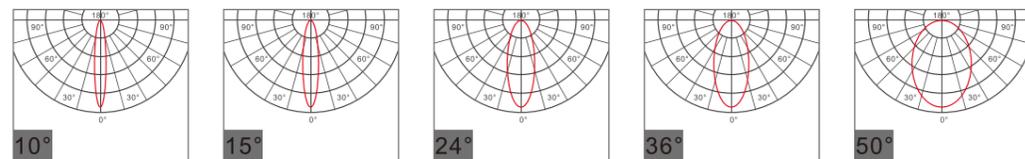

Code No.:DL509B-A

Power	MAX 8W
Voltage	AC 220~240V
Current	200mA
Angle	polarized
Lumen	458LM
CRI	90/98
IP	20
Installation	Surface mounted



White Black




Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

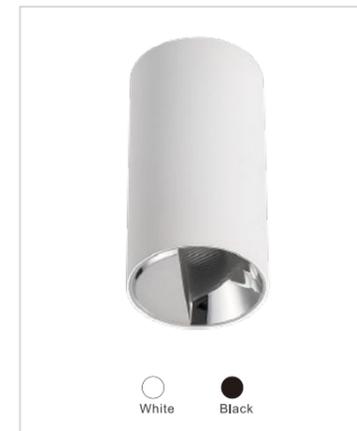

Code No.:DL509B-B


Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	polarized
Lumen	605LM
CRI	90/98
IP	20
Installation	Surface mounted



White Black



Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K



Code No.:DL509-D

Power	MAX 10W					
Voltage	AC 220~240V					
Current	3W 700mA		10W 250mA			
Angle	3°	7°	15°	24°	36°	60°
Lumen	342LM	379LM	803LM	838LM	850LM	591LM
CRI	90/98					
IP	20					
Installation	Embedded					




Reflector




PHILIPS LUMINUS CITIZEN CREE® bridgelux  
2700K / 3000K / 3500K / 4000K / 5000K

Angle

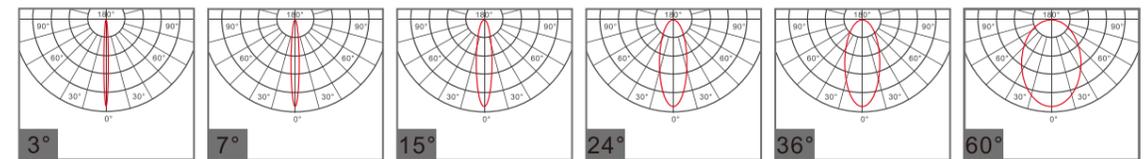


# Fixed

Non adjustable angle

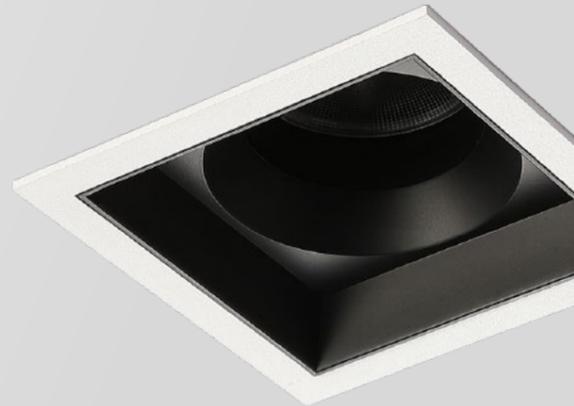


- SCR Dimming
- 0-10V Dimming
- DALI Dimming
- Bluetooth Dimming
- High-power LED SDCM<3
- CRI > 90
- Anti-Glare


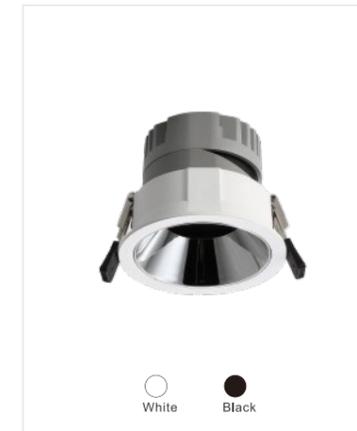


Code No.:DL101-A


Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10°   15°   24°   36°   50°
Lumen	789LM   964LM   1006LM   1021LM   710LM
CRI	90/98
IP	20
Installation	Embedded



### Reflector




### Angle

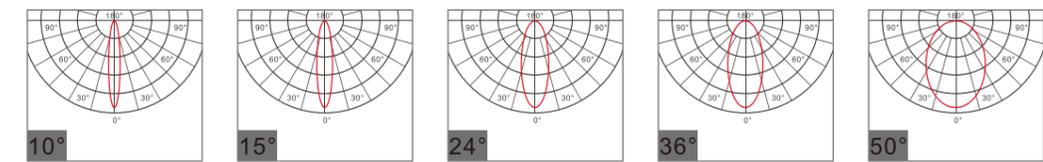


Code No.:DL101-B


Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10°   15°   24°   36°   50°
Lumen	1183LM   1446LM   1509LM   1531LM   1065LM
CRI	90/98
IP	20/54
Installation	Embedded

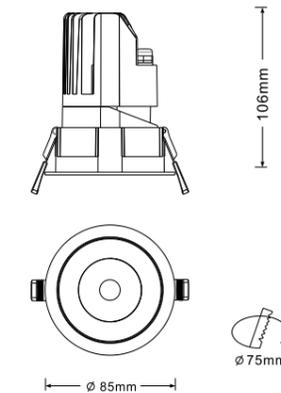


### Reflector




### Angle

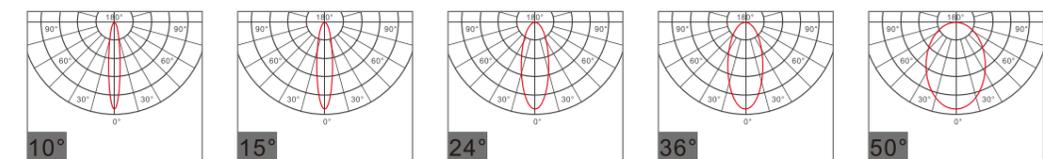

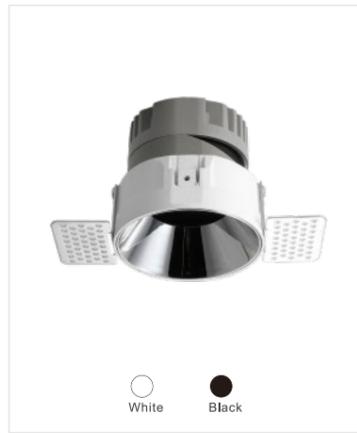

Code No.:DL101N-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux.


2700K / 3000K / 3500K / 4000K / 5000K

Angle

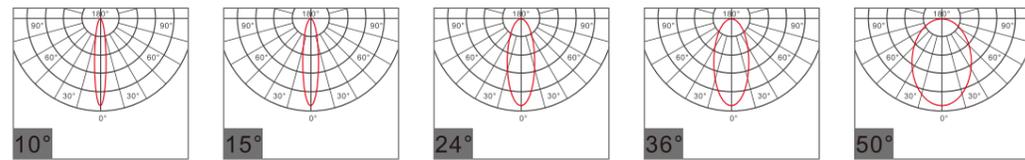


Code No.:DL101N-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded

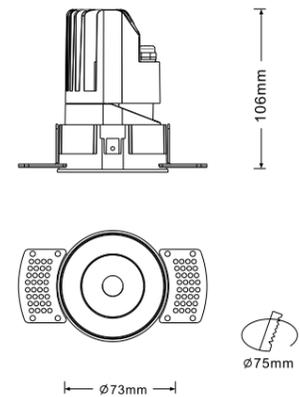

White Black


Reflector




PHILIPS LUMINUS CITIZEN CREE bridgelux.

2700K / 3000K / 3500K / 4000K / 5000K


Angle

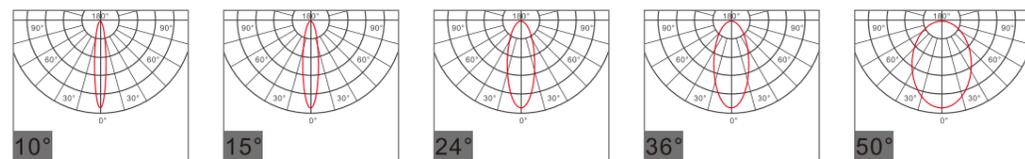

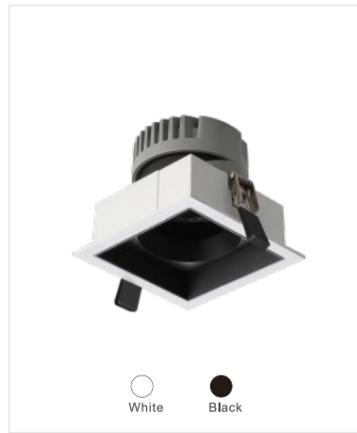


Code No.:DL101S-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



75mm




75mm\*75mm

84mm\*84mm

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

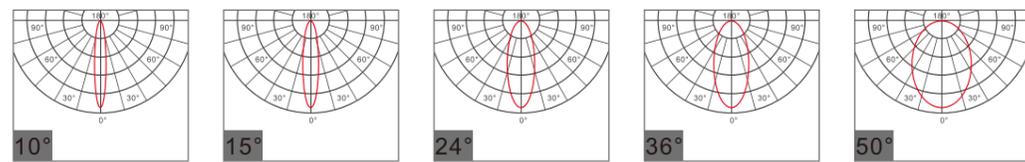


Code No.:DL101S-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded



106mm



75mm\*75mm

84mm\*84mm

White Black



Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

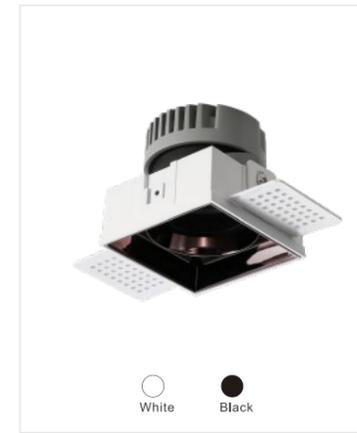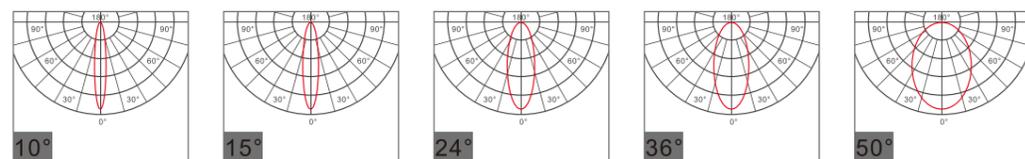


Code No.:DL101SN-A

Power	MAX 12W
Voltage	AC 220~240V
Current	300mA
Angle	10° 15° 24° 36° 50°
Lumen	789LM 964LM 1006LM 1021LM 710LM
CRI	90/98
IP	20
Installation	Embedded



75mm



75mm\*75mm

73mm\*73mm

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux


2700K / 3000K / 3500K / 4000K / 5000K

Angle

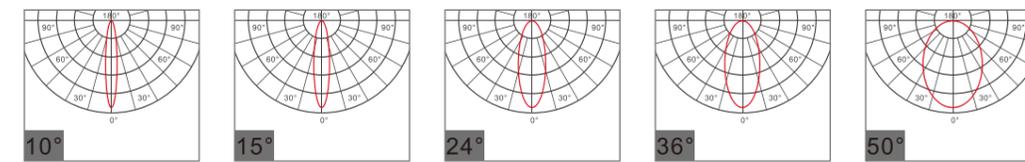


Code No.:DL101SN-B

Power	MAX 18W
Voltage	AC 220~240V
Current	450mA
Angle	10° 15° 24° 36° 50°
Lumen	1183LM 1446LM 1509LM 1531LM 1065LM
CRI	90/98
IP	20/54
Installation	Embedded



106mm



75mm\*75mm

73mm\*73mm

White Black


Reflector



PHILIPS LUMINUS CITIZEN CREE bridgelux

2700K / 3000K / 3500K / 4000K / 5000K

Angle

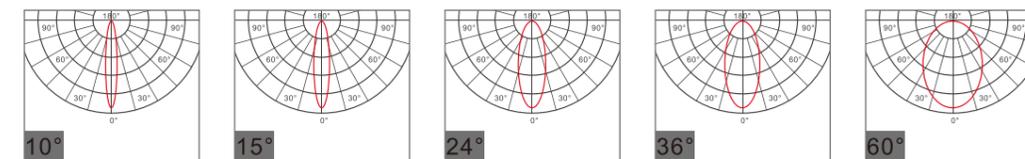





LINEAR DOWNLIGHT

# LINE LAMP

Pre embedded long strip spotlights

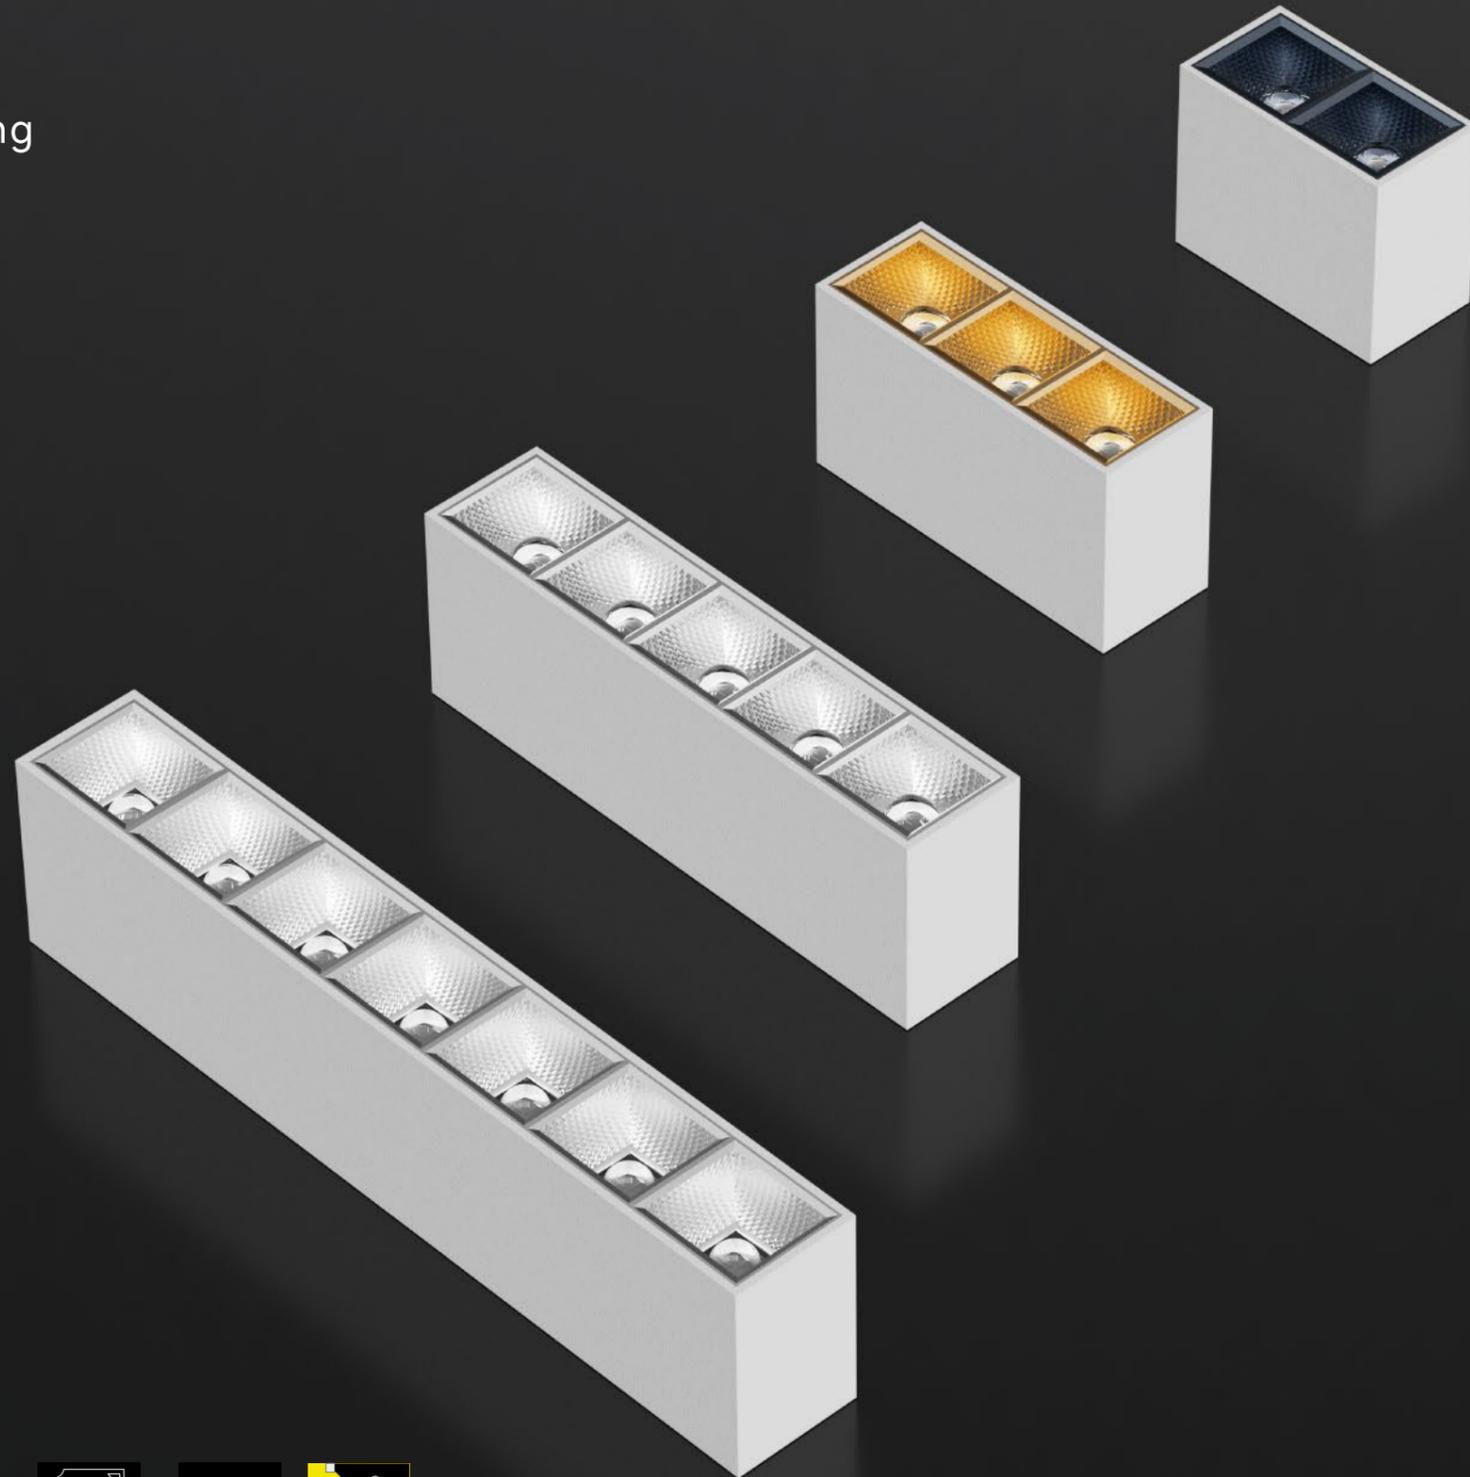

SCR Dimming



0-10V Dimming



DALI Dimming



Bluetooth Dimming





High-power LED  
SDCM<3




CRI>90



Anti-Glare





XM002





XM003

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XM002	MAX 6W	36V	150mA	50°/80°	573 lm	90	20	Surface mounted
XM003	MAX 12W	36V	300mA	50°/80°	1151 lm	90	20	

Chip Brand



XM005

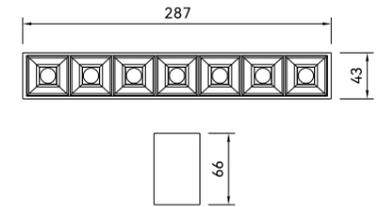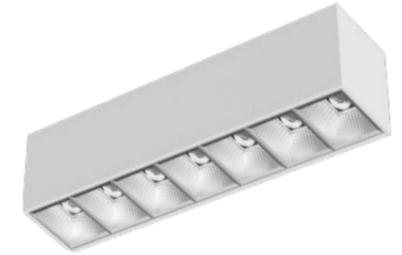

XM007

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XM005	MAX 20W	36V	500mA	50°/80°	1913 lm	90	20	Surface mounted
XM007	MAX 30W	36V	700mA	50°/80°	2862 lm	90	20	

Chip Brand





SCR Dimming



0-10V Dimming



DALI Dimming



Bluetooth Dimming



High-power LED  
SDCM<3




CRI > 90



Anti-Glare

Mx Shining Limited

## Line lamp

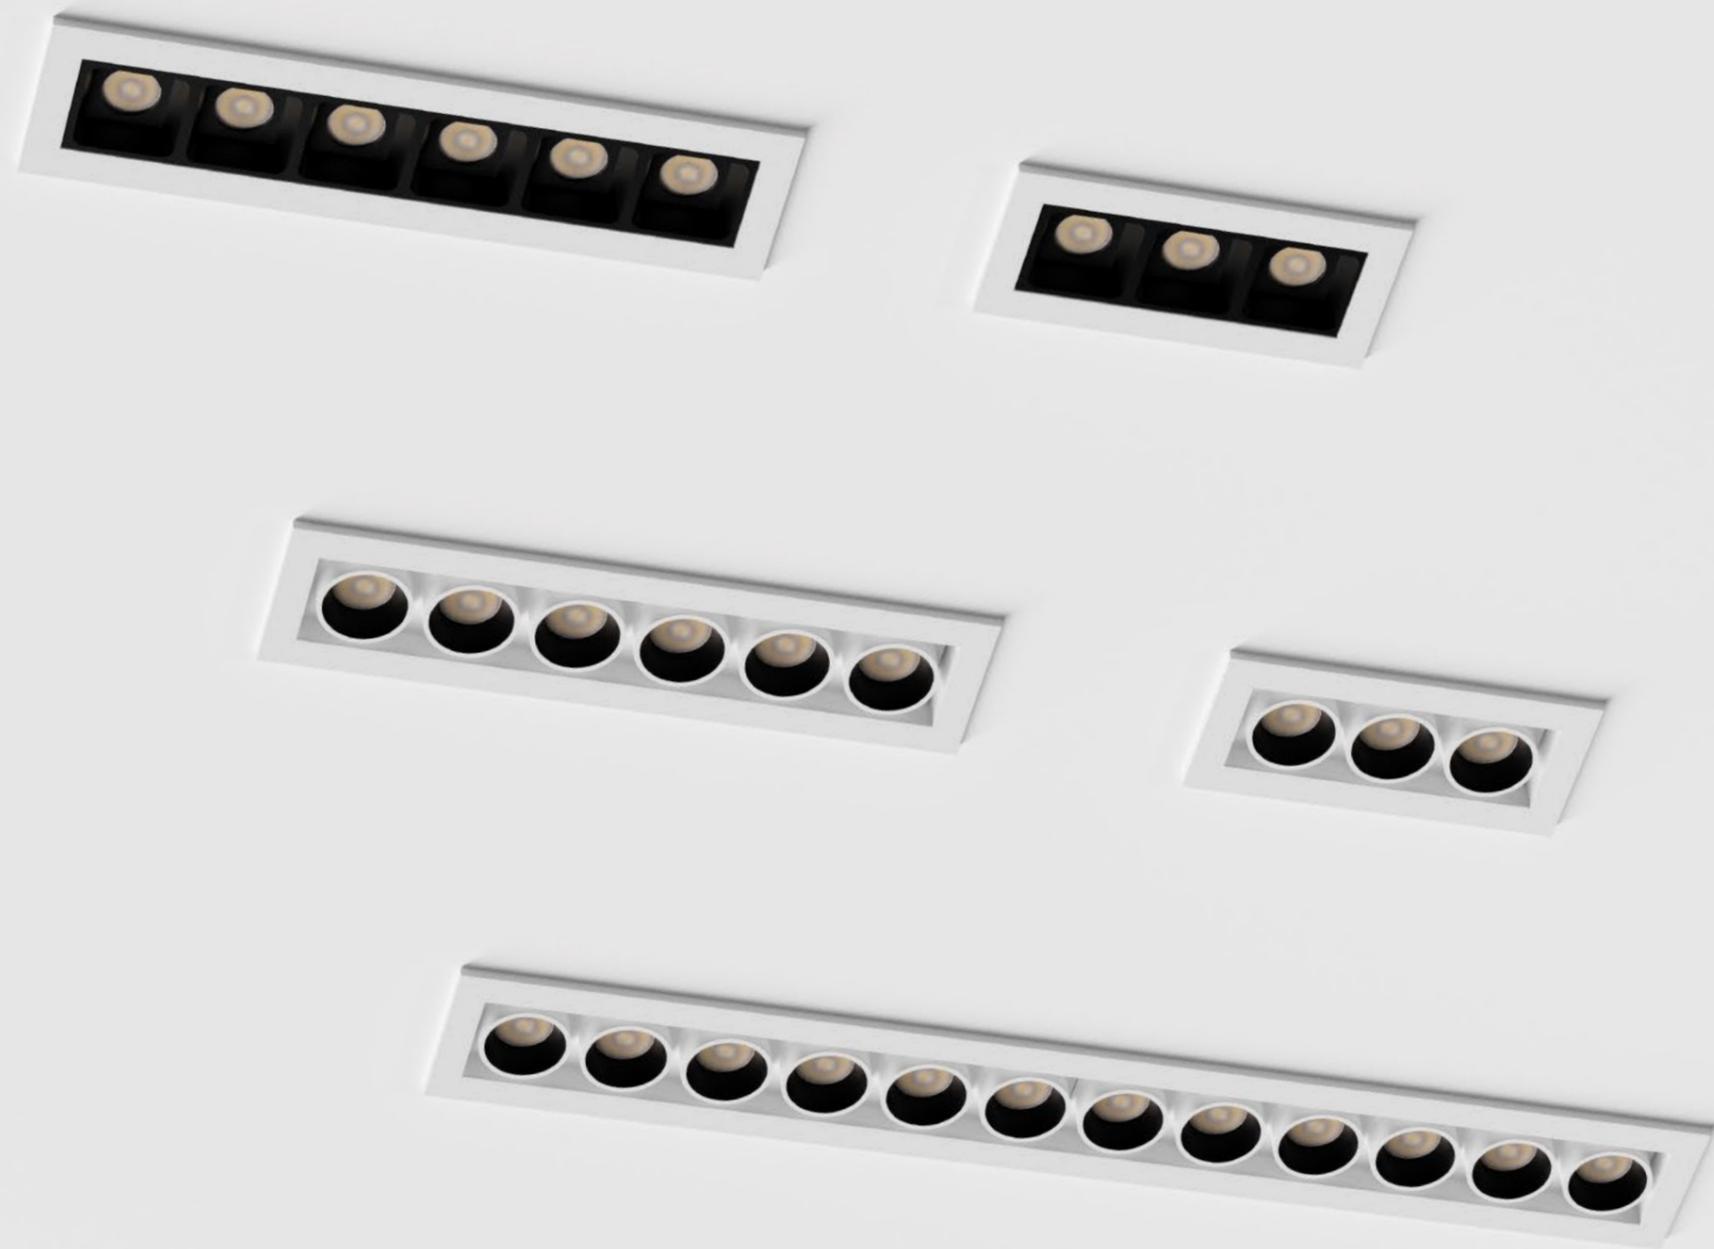

SCR Dimming



0-10V Dimming



DALI Dimming



Bluetooth Dimming



High-power LED  
SDCM<3








CRI>90



Anti-Glare

**XB**



Ø65\*27mm

**XB003**



Ø122\*27mm

**XB004**



Ø236\*27mm





**XB005**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XB003	MAX 6W	9V	600mA	24°/36°	483 lm	90	20	Embedded
XB004	MAX 10W	18V	500mA	24°/36°	805 lm	90	20	
XB005	MAX 20W	36V	500mA	24°/36°	1609lm	90	20	

Chip Brand



**XB**



Ø65\*27mm

**XB003-1**



Ø122\*27mm

**XB004-1**



Ø236\*27mm

**XB005-1**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XB003-1	MAX 6W	9V	600mA	24°/36°	483 lm	90	20	Embedded
XB004-1	MAX 10W	18V	500mA	24°/36°	805 lm	90	20	
XB005-1	MAX 20W	36V	500mA	24°/36°	1609lm	90	20	

Chip Brand



## LINE LAMP

Pre embedded long  
strip spotlights



SCR Dimming



0-10V Dimming



DALI Dimming



Bluetooth Dimming




High-power LED  
SDCM<3



CRI>90









Anti-Glare

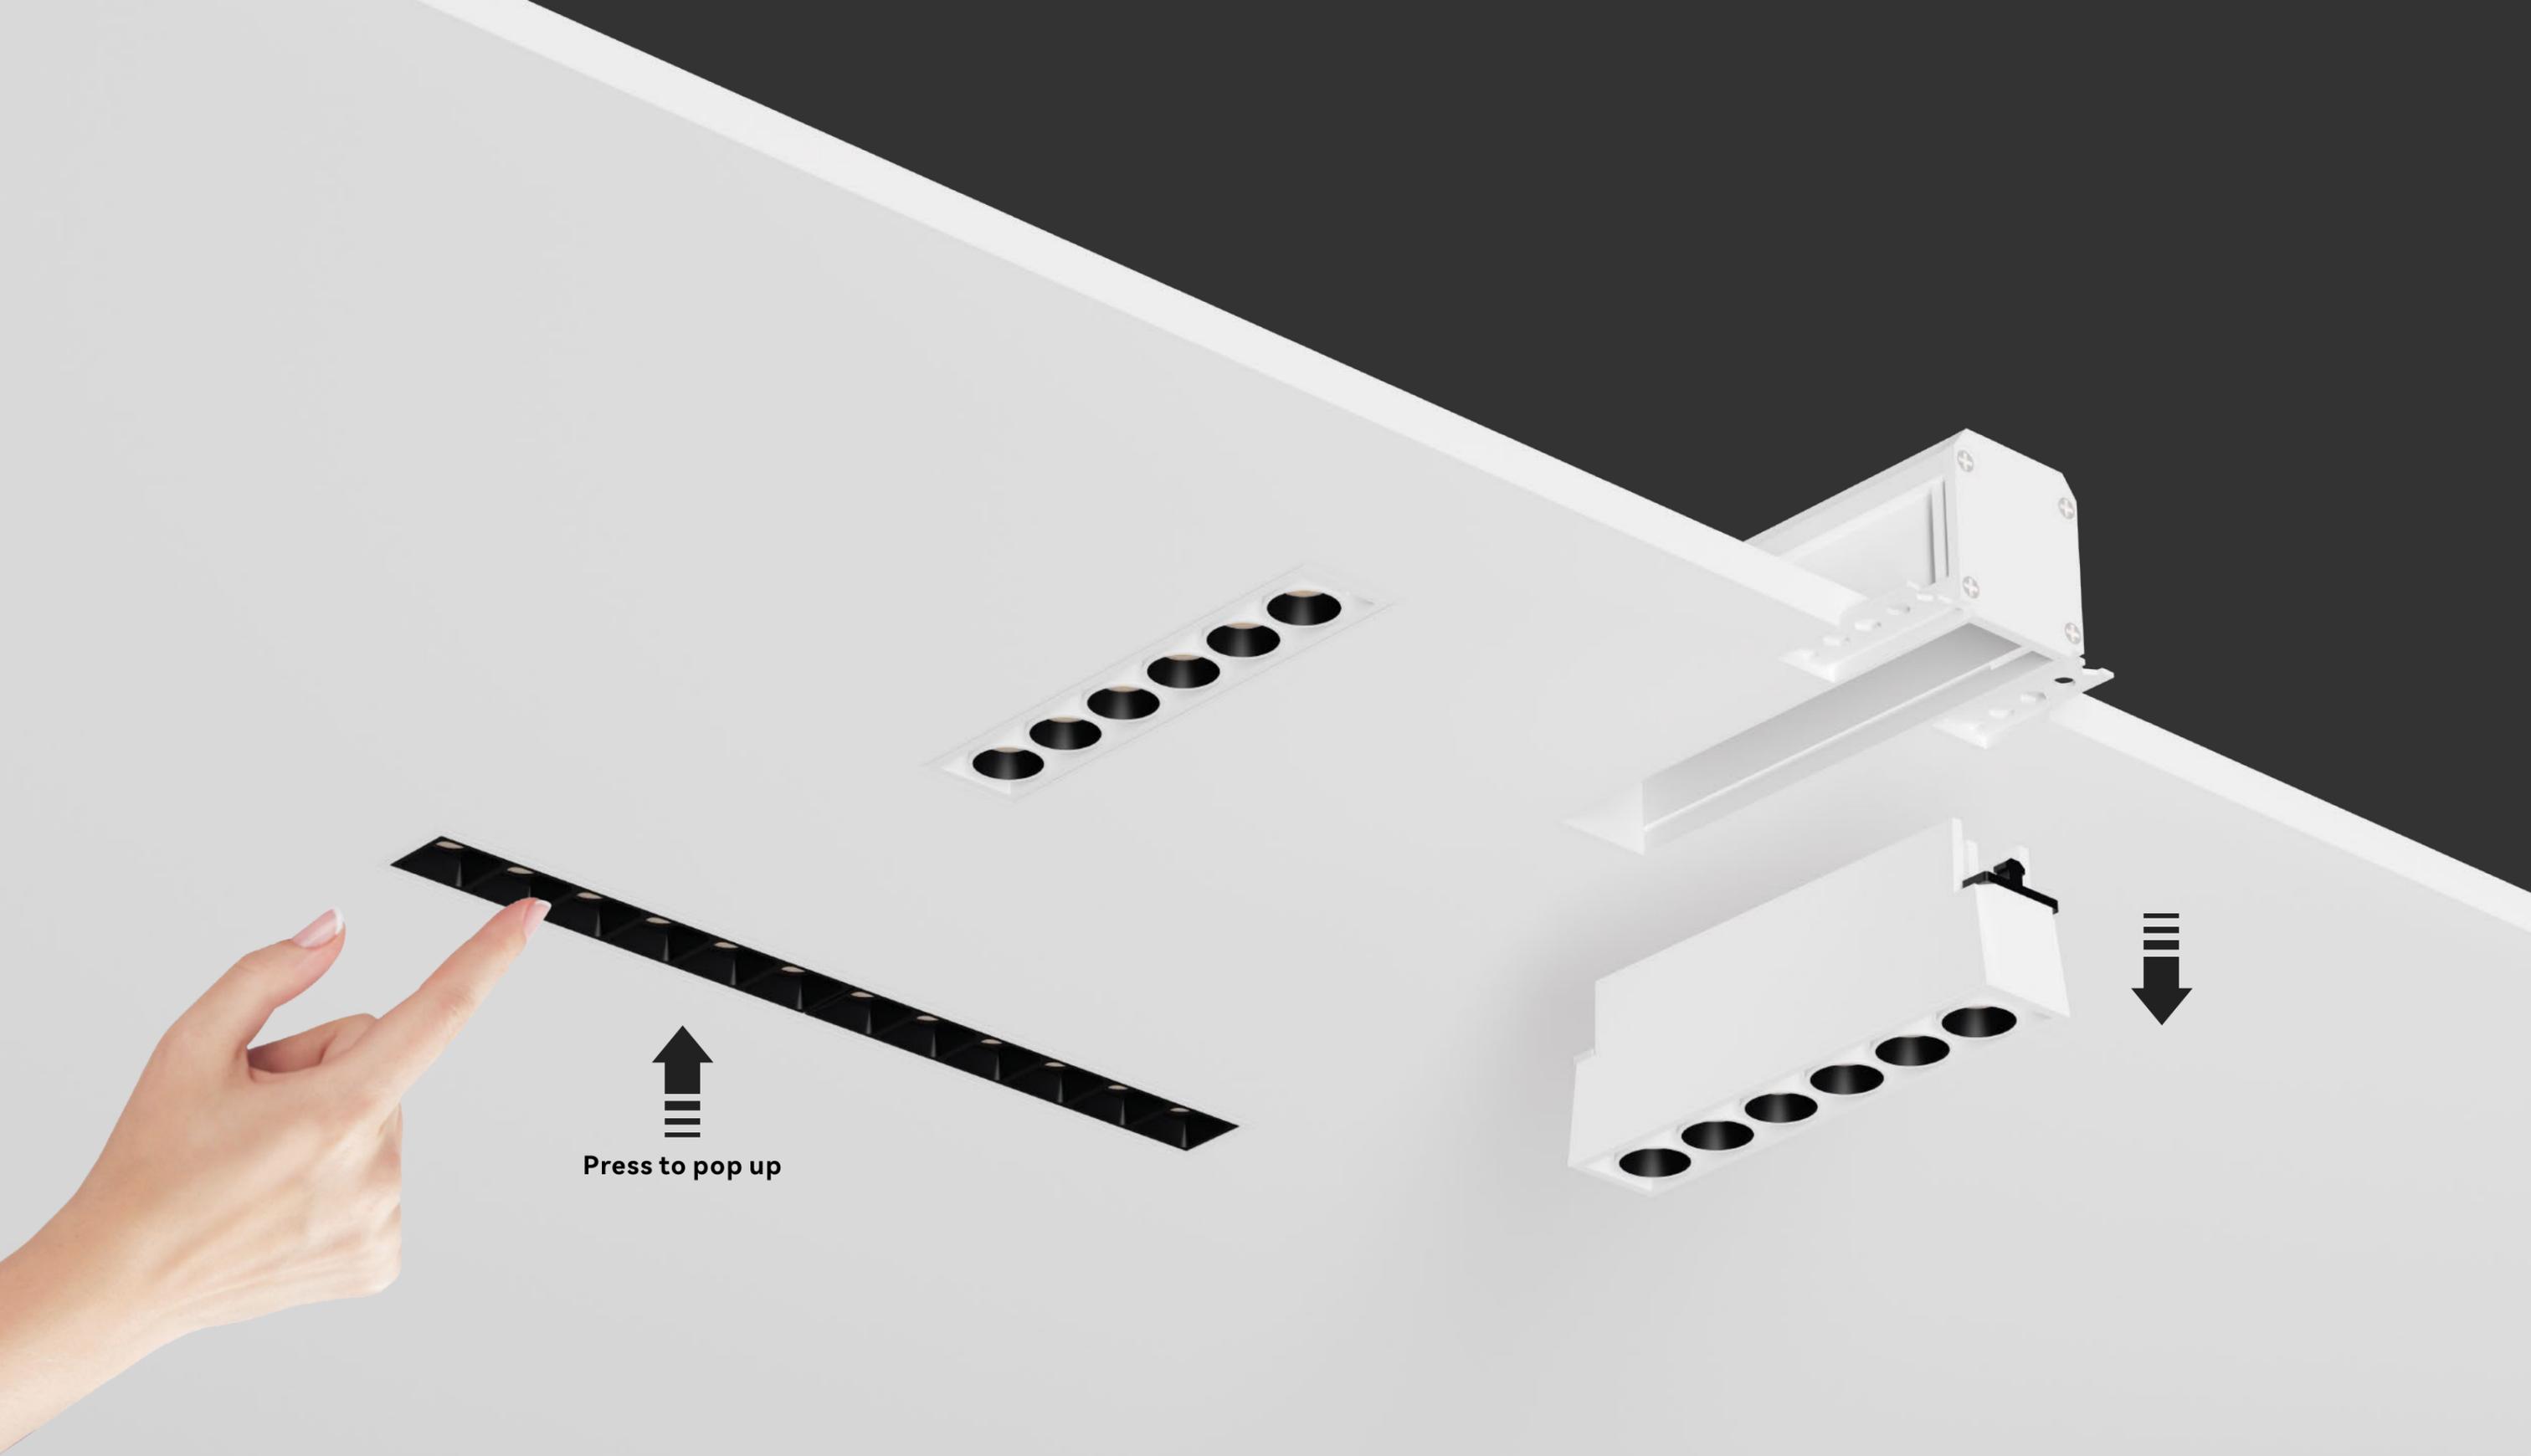

↑  
Press to pop up

-  SCR Dimming
-  0-10V Dimming
-  DALI Dimming
-  Bluetooth Dimming
-  High-power LED SDCM<3
-  CRI > 90
-  Anti-Glare

**XB**




**XB003N**

**XB004N**







**XB005N**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XB003N	MAX 6W	9V	600mA	24°/36°	483 lm	90	20	Embedded
XB004N	MAX 10W	18V	500mA	24°/36°	811 lm	90	20	
XB005N	MAX 20W	36V	500mA	24°/36°	1622 lm	90	20	

Chip Brand



**XB**




**XB003N-1**

**XB004N-1**

**XB005N-1**



Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XB003N-1	MAX 6W	9V	600mA	24°/36°	483 lm	90	20	Embedded
XB004N-1	MAX 10W	18V	500mA	24°/36°	811 lm	90	20	
XB005N-1	MAX 20W	36V	500mA	24°/36°	1622 lm	90	20	

Chip Brand



# Line lamp

Vertical adjustment 30°

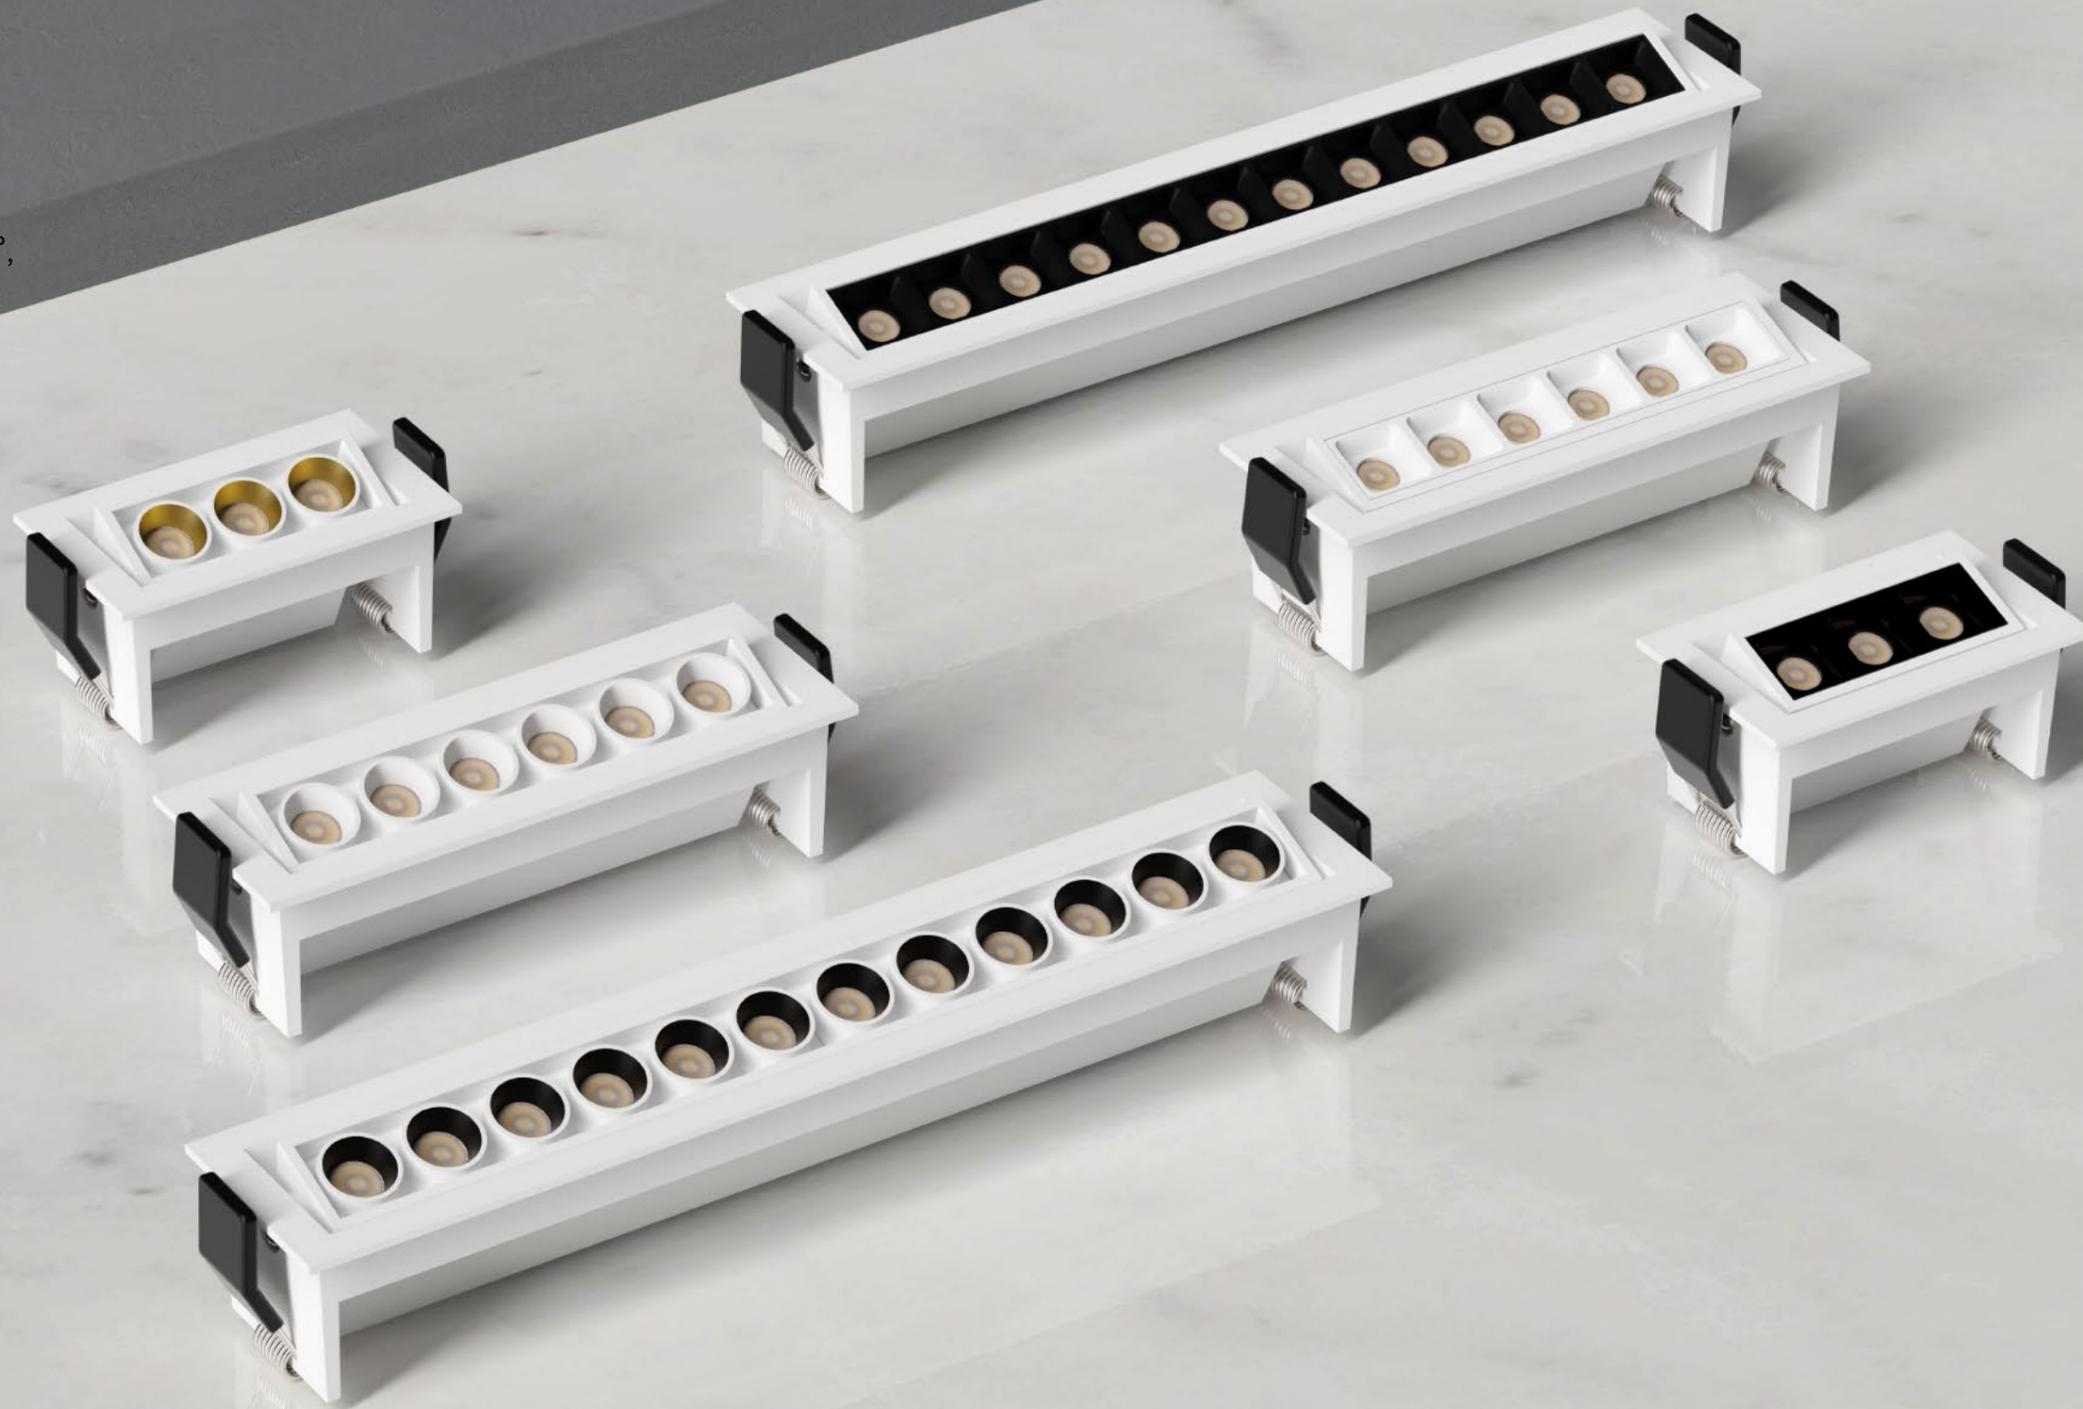

SCR Dimming



0-10V Dimming




DALI Dimming



Bluetooth Dimming



High-power LED  
SDCM<3



CRI > 90



Anti-Glare










## Line lamp

Vertical adjustment 30°,



-  SCR Dimming
-  0-10V Dimming
-  DALI Dimming
-  Bluetooth Dimming
-  High-power LED SDCM<3
-  CRI>90
-  Anti-Glare

**XB**



Ø78\*43mm

**XB003A**



Ø136\*43mm

**XB004A**




Ø250\*43mm

**XB005A**






Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XB003A	MAX 6W	9V	600mA	24°/36°	483 lm	90	20	Embedded
XB004A	MAX 10W	18V	500mA	24°/36°	811 lm	90	20	
XB005A	MAX 20W	36V	500mA	24°/36°	1622 lm	90	20	

Chip Brand



**OSRAM** *bridgelux*  
2700K | 3000K | 3500K | 4000K | 5000K

**XB**



Ø78\*43mm

**XB003A-1**



Ø136\*43mm

**XB004A-1**




Ø250\*43mm


**XB005A-1**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XB003A-1	MAX 6W	9V	600mA	24°/36°	483 lm	90	20	Embedded
XB004A-1	MAX 10W	18V	500mA	24°/36°	811 lm	90	20	
XB005A-1	MAX 20W	36V	500mA	24°/36°	1622 lm	90	20	


Chip Brand





**OSRAM** *bridgelux*  
2700K | 3000K | 3500K | 4000K | 5000K


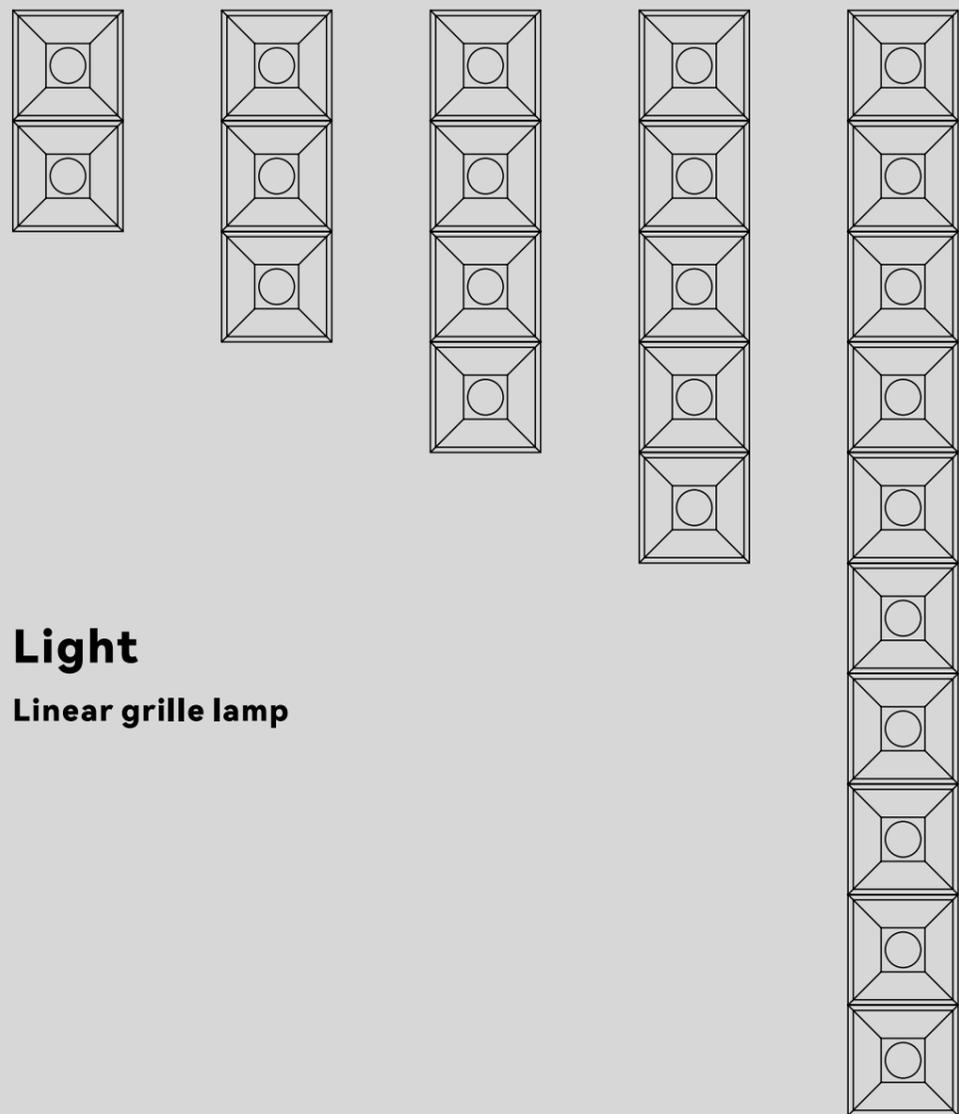


**Light**  
Linear grille lamp



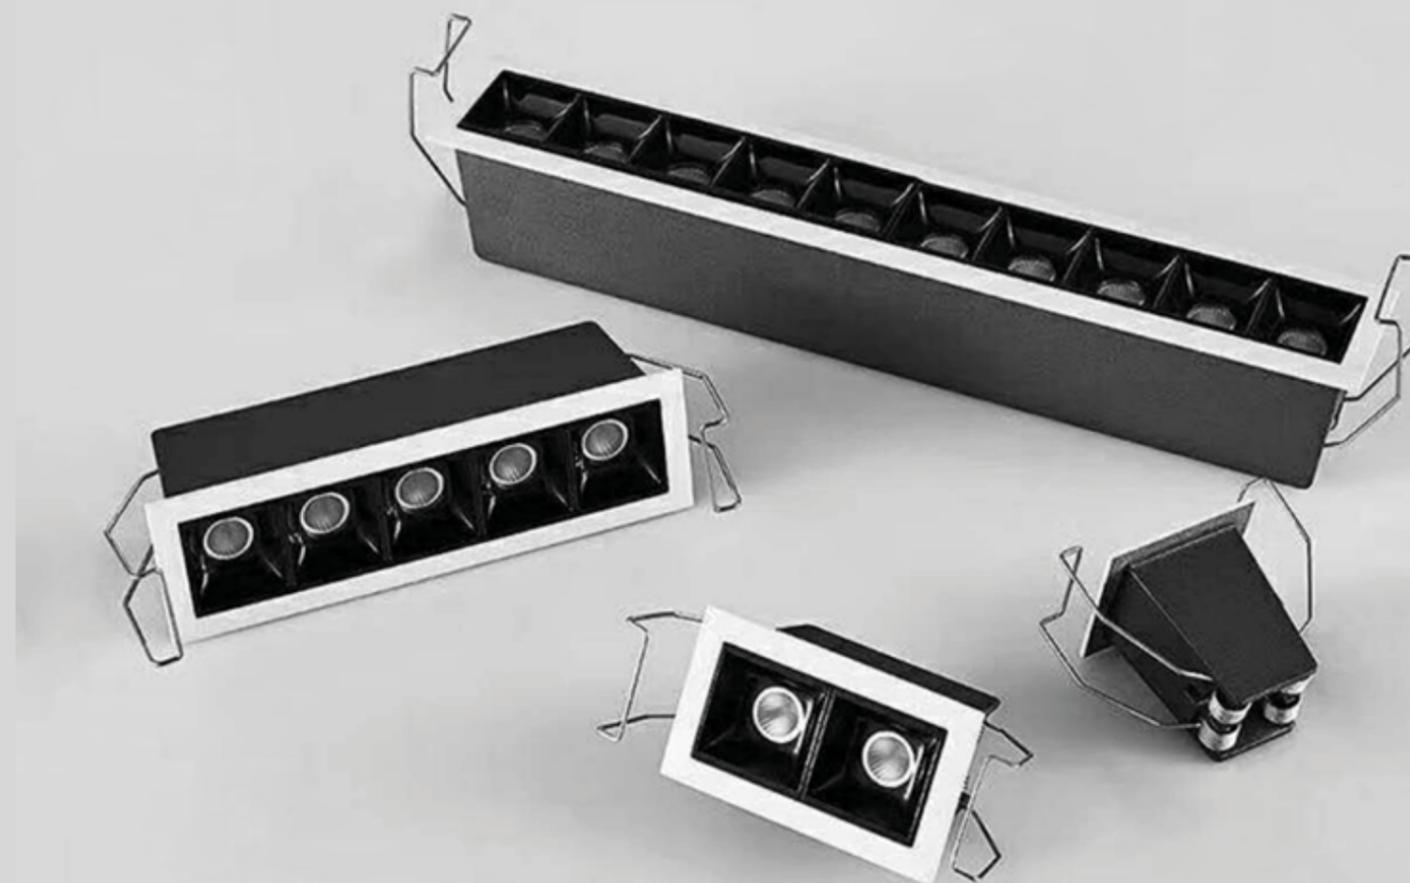




**XA001**



**XA002**




**XA005**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XA001	MAX 2W	3V	700mA	15°/30°/45°	132 lm	90	20	Embedded
XA002	MAX 4W	6V	600mA	15°/30°/45°	278 lm	90	20	
XA005	MAX 10W	15V	600mA	15°/30°/45°	687 lm	90	20	



Chip Brand



**OSRAM** *bridgelux*  
2700K | 3000K | 3500K | 4000K | 5000K




**XA010**

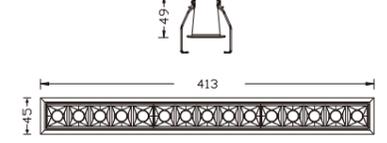

**XA015**

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XA010	MAX 20W	30V	600mA	15°/30°/45°	1233 lm	90	20	Embedded
XA015	MAX 30W	36V	600mA	15°/30°/45°	1913 lm	90	20	

Chip Brand



**OSRAM** *bridgelux*  
2700K | 3000K | 3500K | 4000K | 5000K



15°  
Narrow









30°  
Middle



45°  
Wide

XA



Ø42\*41mm  
XA001N




Ø72\*41mm  
XA002N



Ø144\*41mm  
XA005N





Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XA001N	MAX 2W	3V	700mA	15°/30°/45°	132 lm	90	20	Embedded
XA002N	MAX 4W	6V	600mA	15°/30°/45°	278 lm	90	20	
XA005N	MAX 10W	15V	600mA	15°/30°/45°	687 lm	90	20	

Chip Brand



OSRAM bridgelux  
2700K | 3000K | 3500K | 4000K | 5000K

XA

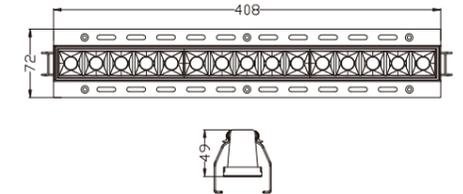

Ø277\*41mm  
XA010N



Ø410\*41mm  
XA015N

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XA010N	MAX 20W	30V	600mA	15°/30°/45°	1233 lm	90	20	Embedded
XA015N	MAX 30W	36V	600mA	15°/30°/45°	1913 lm	90	20	

Chip Brand




OSRAM bridgelux  
2700K | 3000K | 3500K | 4000K | 5000K



Wall washing Lighting



XA

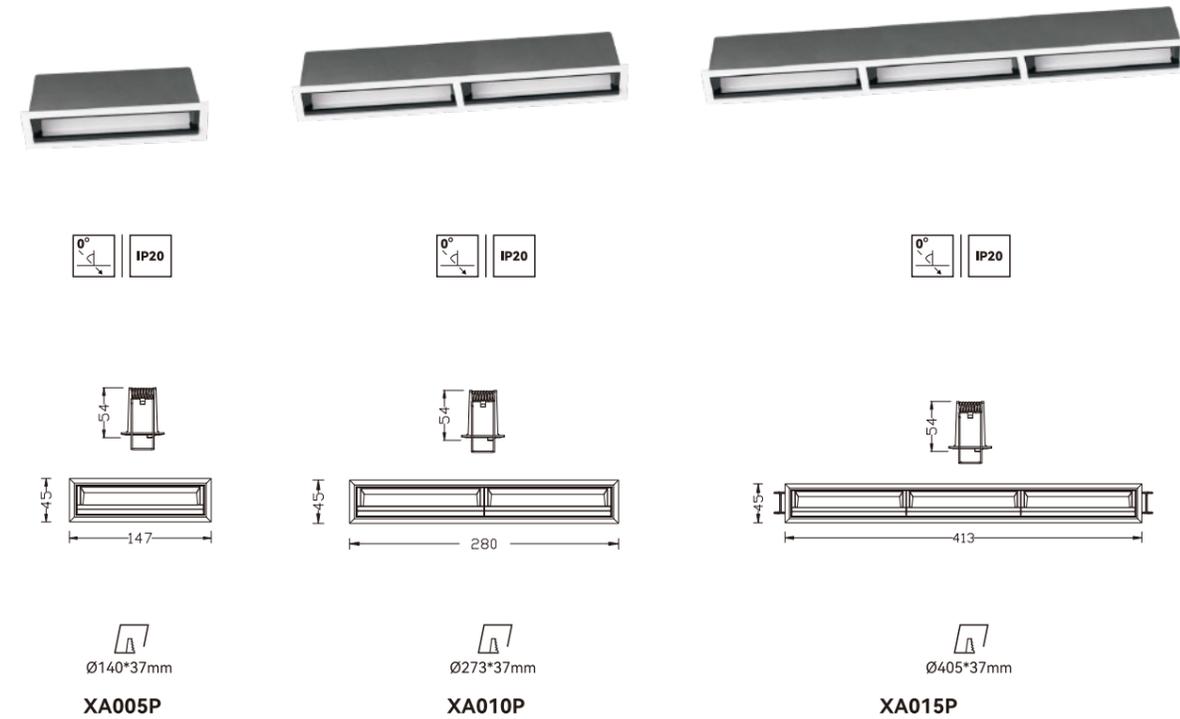

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
XA005P	MAX 10W	15V	600mA	Polarized	655 lm	90	20	Embedded
XA010P	MAX 20W	30V	700mA	Polarized	1305 lm	90	20	
XA015P	MAX 30W	36-50V	600mA	Polarized	1968 lm	90	20	

Chip Brand  
 OSRAM bridgelux  
 2700K | 3000K | 3500K | 4000K | 5000K



TRACK LIGHT

# Track light



White



Black



Chrome



Matt Bronze





Grey



Matt Silver



TA

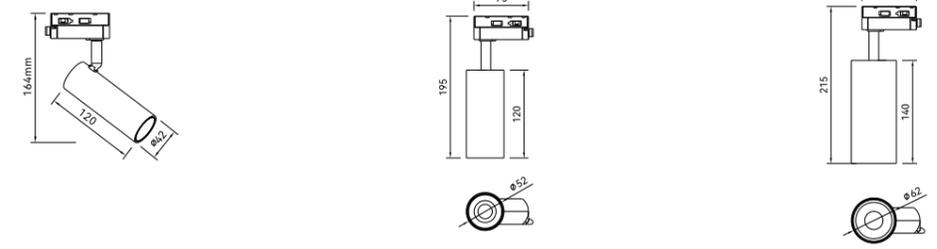

TA001 TA002 TA003

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
TA001	MAX 6W	36V	150mA	15°/24°/36°/50°	483 lm	90	20	Track Mounted
TA002	MAX 15W	36V	350mA	10°/15°/24°/36°/50°	1218 lm	90	20	
TA003	MAX 25W	36V	600mA	10°/15°/24°/36°/50°	2037 lm	90	20	

Optical accessories



Chip Brand





SWADI

2

→ 董事办公室  
Director Office

← 中德融资租赁有限公司  
CSDC Leasing Company  
Kunshan


← 中德融资租赁有限公司  
CSDC Leasing Company  
Kunshan

- 会议室  
Meeting Room
- 中德融资租赁有限公司  
CSDC Leasing Company  
Kunshan
- 接待区  
Reception Area
- 员工休息区  
Employee Rest Area
- 中德融资租赁有限公司  
CSDC Leasing Company  
Kunshan







TH



TH001



TH001Q

Code No	Power	Voltage	Current	Angle	Lumen	CRI	IP	Installation
TH001	MAX 15W	36V	350mA	15°/24°/36°/60°	1207 lm	90	20	Track Mounted
TH001Q	MAX 15W	36V	350mA	15°/24°/36°/60°	1207 lm	90	20	Embedded

Optical accessories



Honey Comb   Spread Optics   Solite Optics

Chip Brand





PROFILE LIGHT

.....

WELCOME TO CONTACT US FOR  
LIGHTING DESIGNS









# CUSTOMIZATION

Mx Shining Limited


## Preconfigured Shapes for Pendant or Ceiling

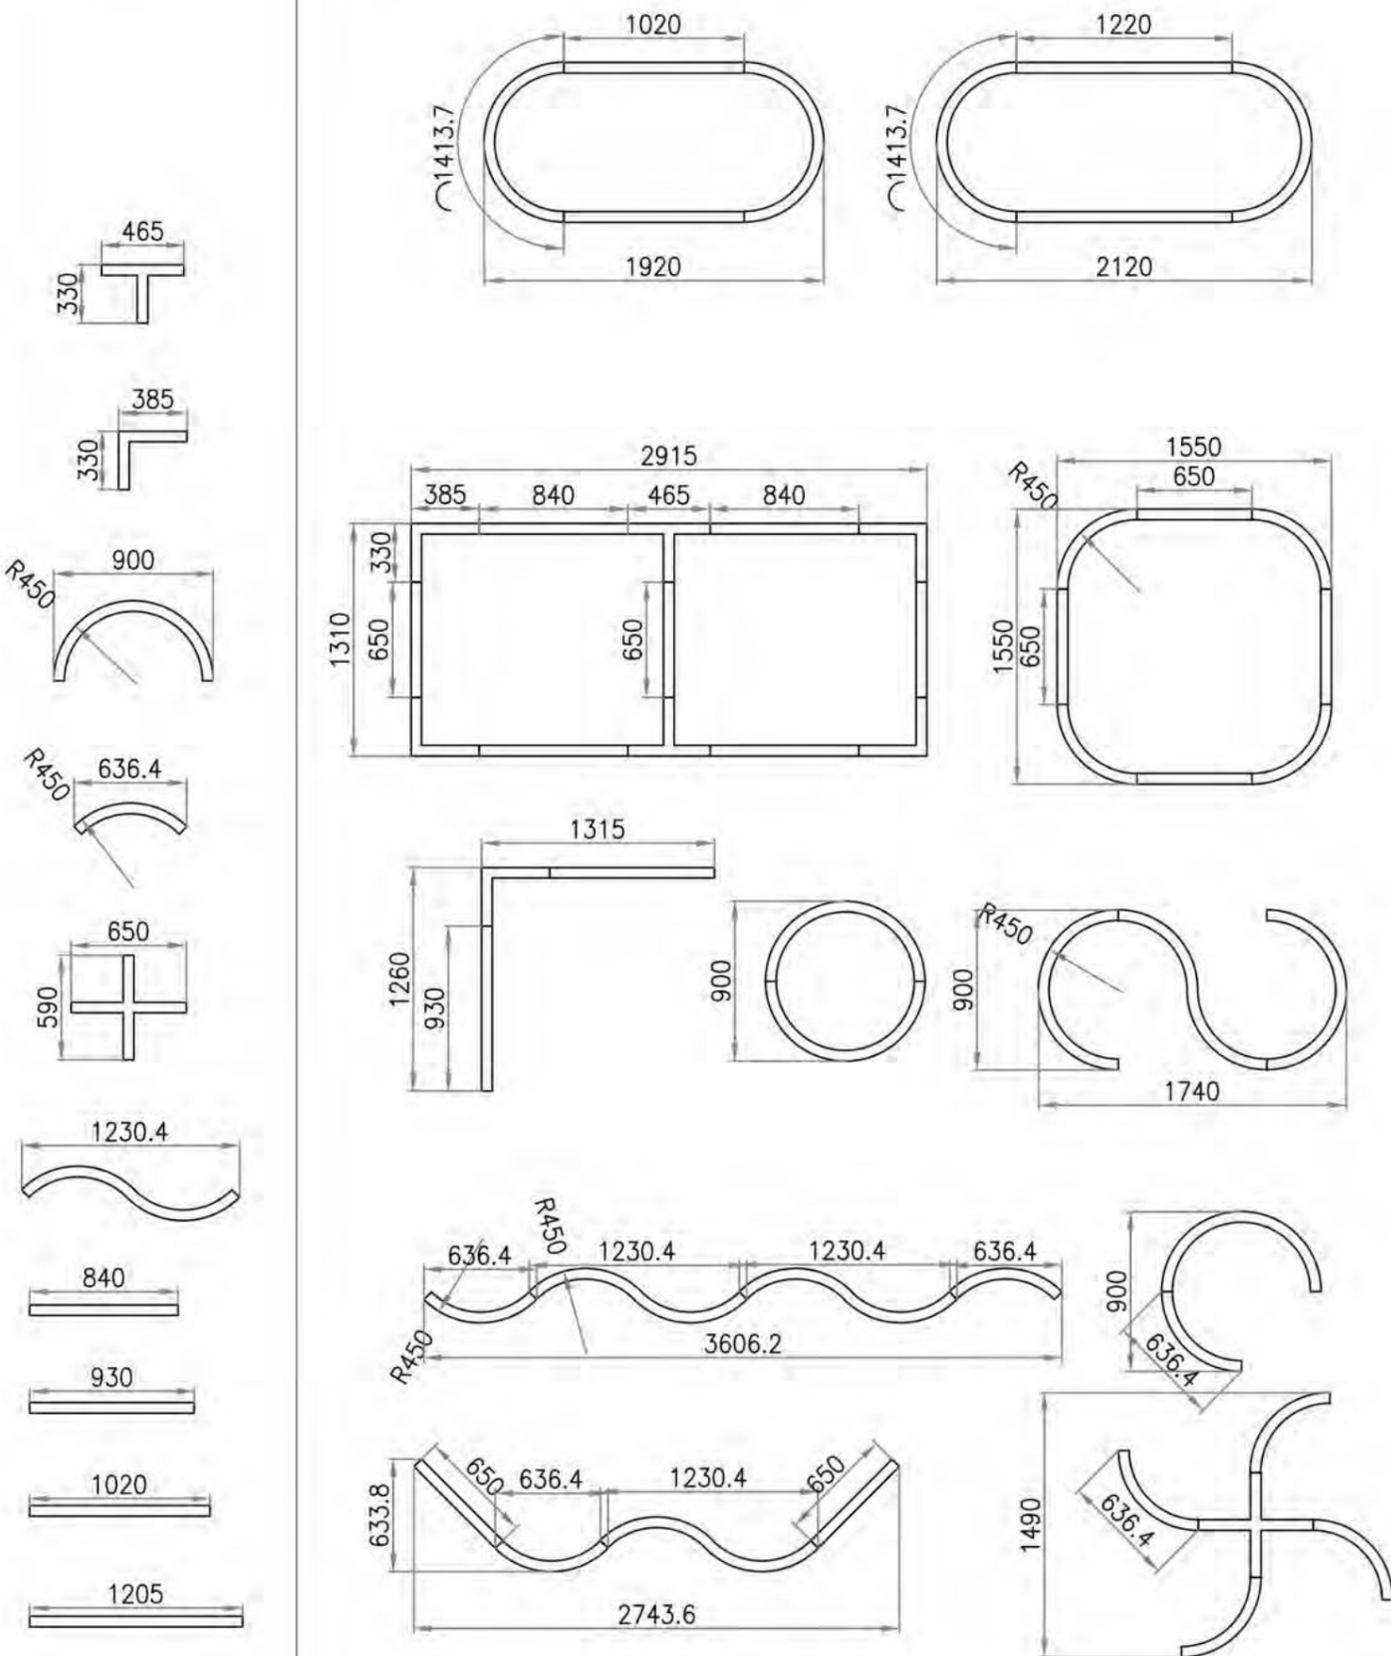


## STRAIGHTS & MITERED CORNERS

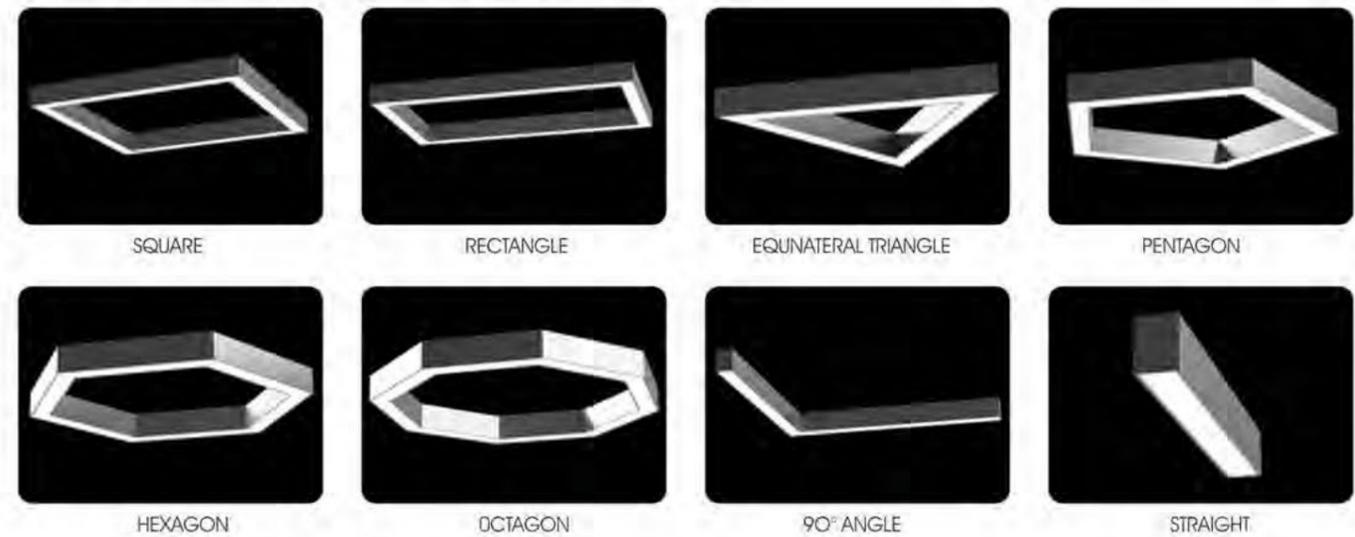

## SOFT CORNERS

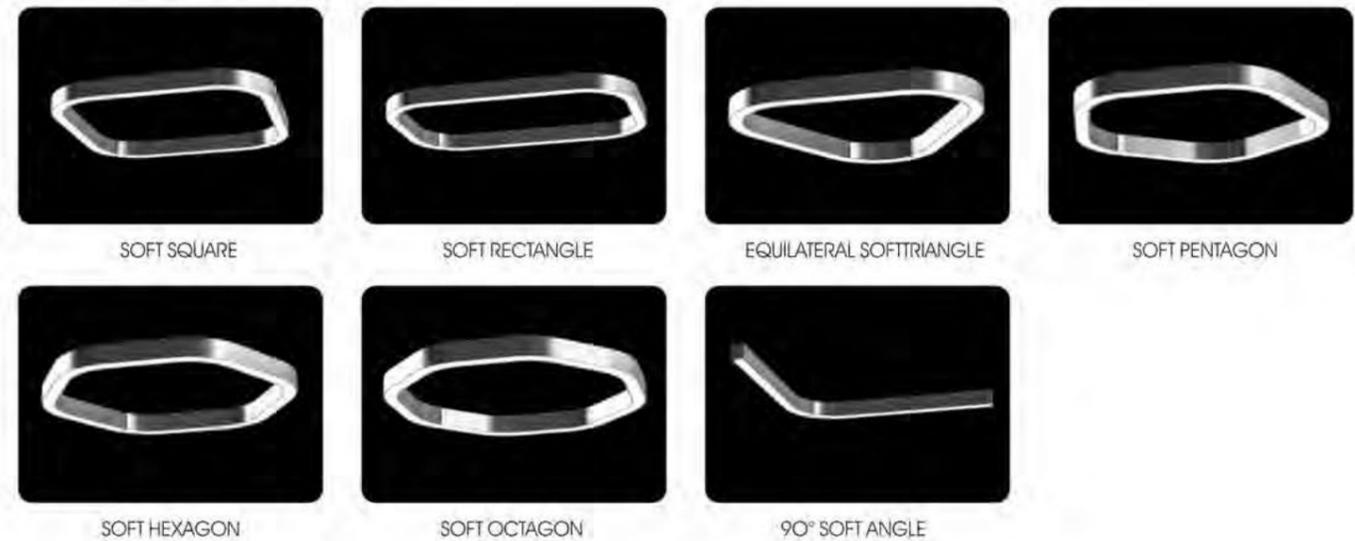


## CURVES, SQUIGGLES, & ELLIPSES

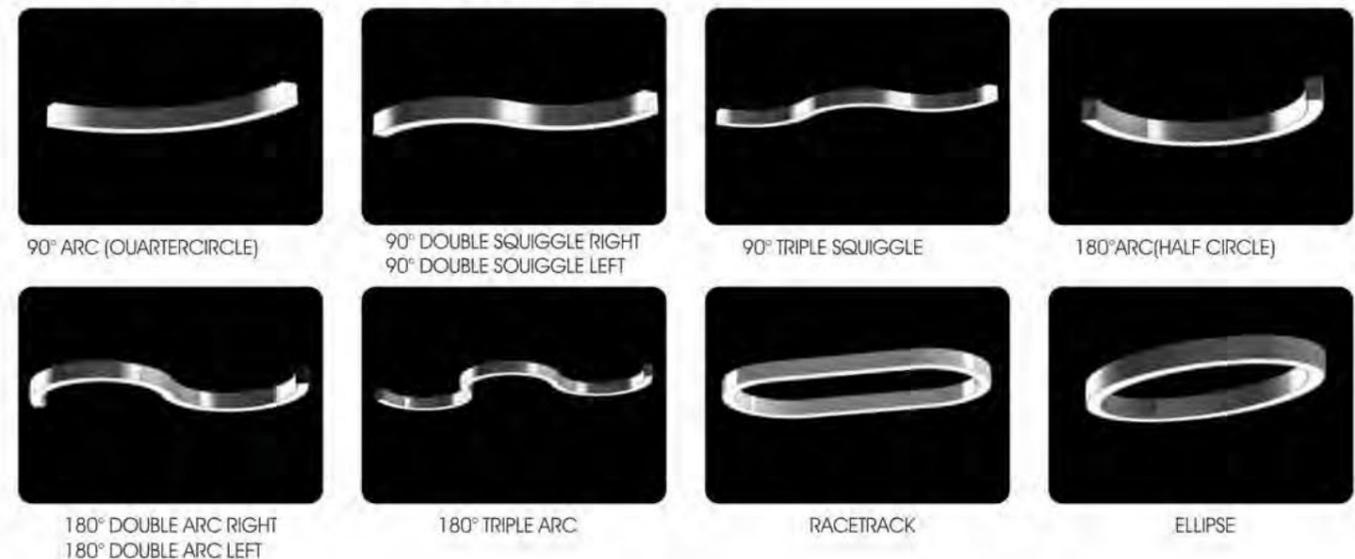

## Patent Design


Smart Male & Female Connection System





DIAMETER AVAILABLE FROM 1.5-2.0M

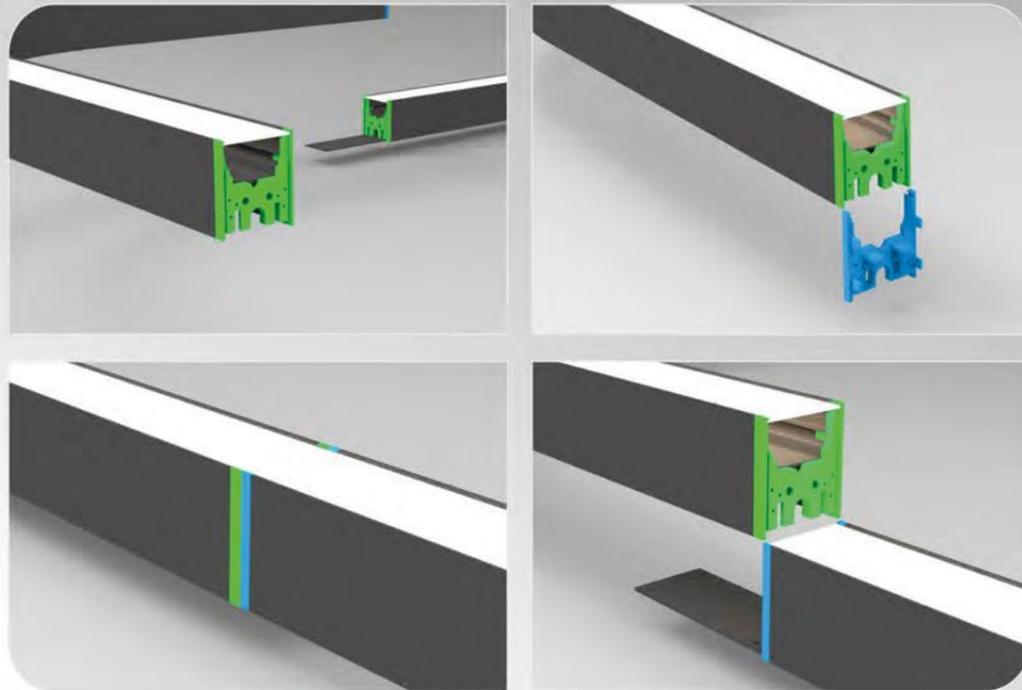

### Abandon Poor Quality Connectors Use Canco Smart Connection System

- No Light Leak, Solve The Biggest Problem
- No Need Rotate, Easy To Install
- Less Wire Connect, Simple To Understanding
- Faster Installation, Save Labor Cost

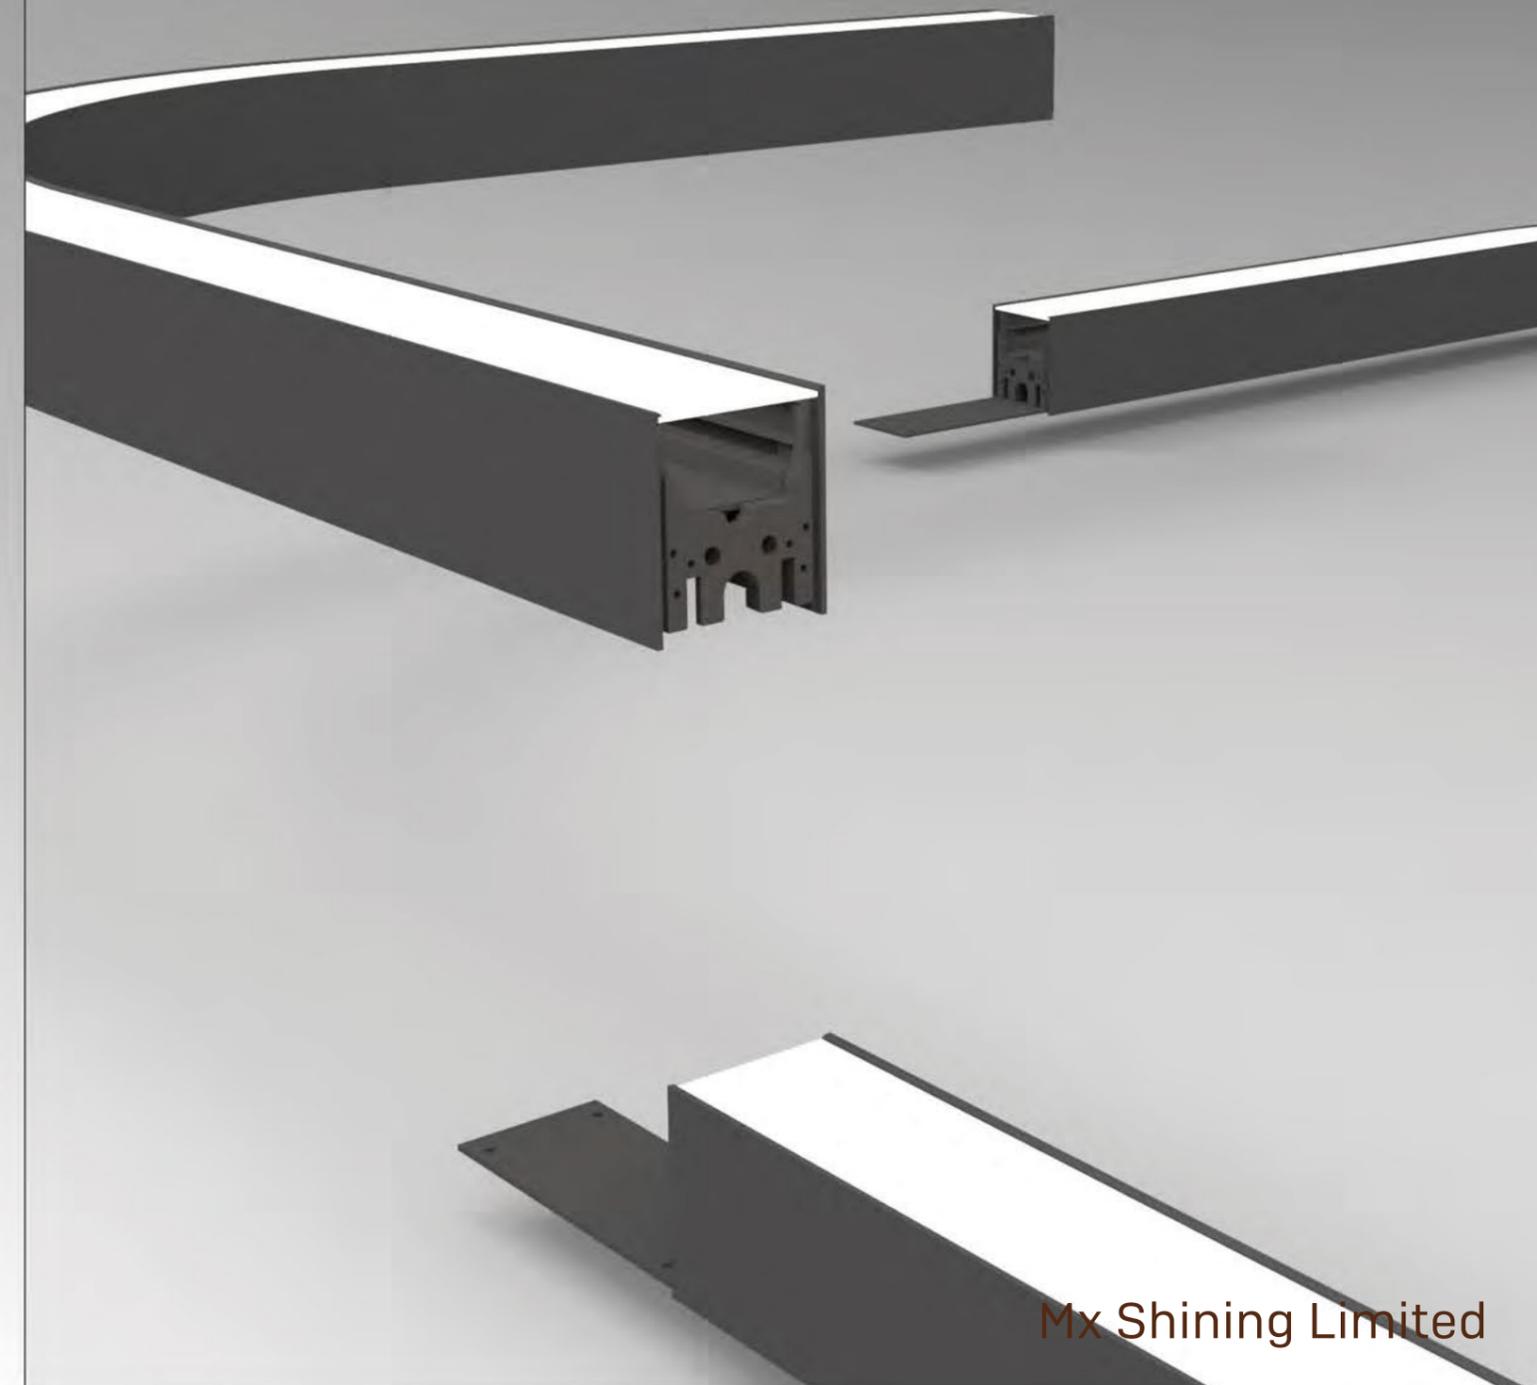

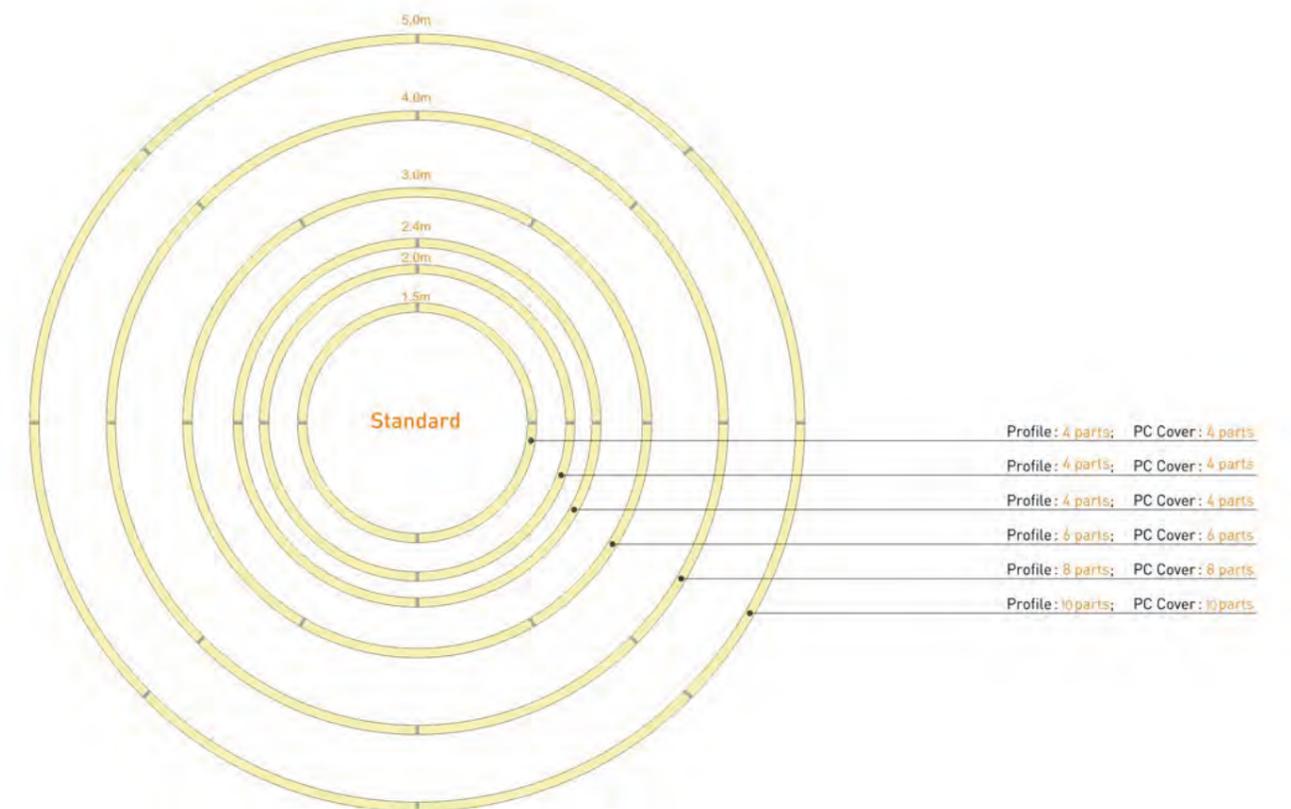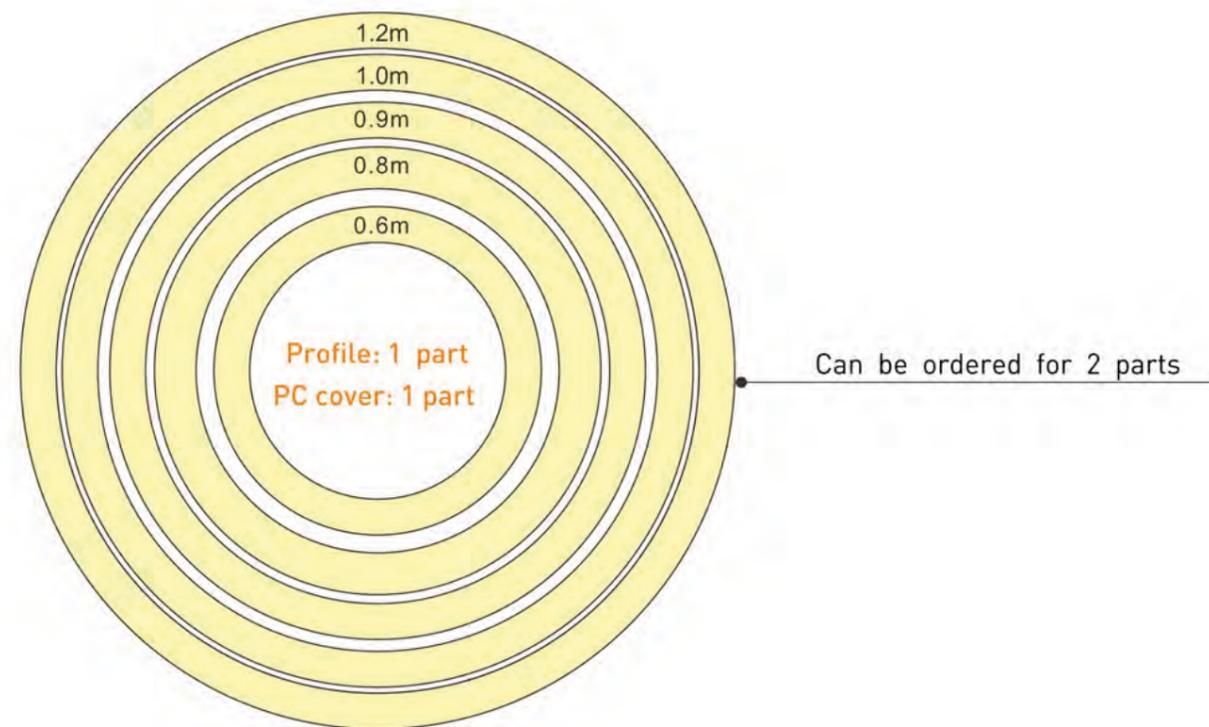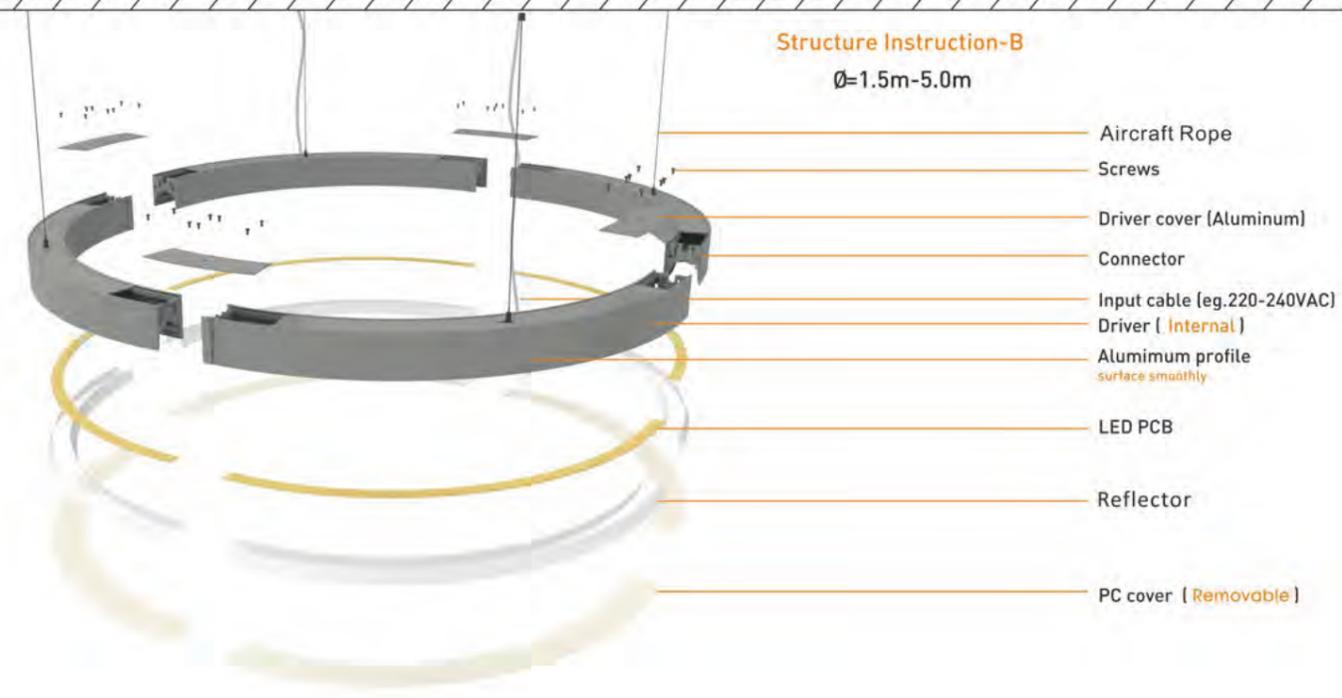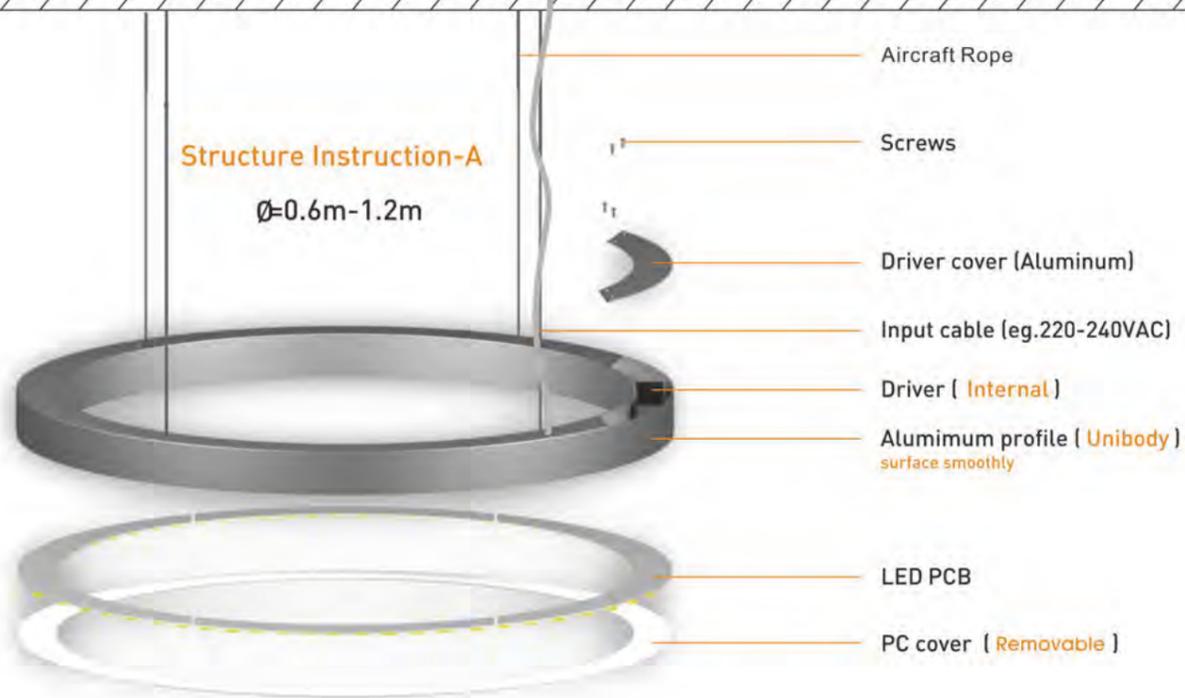


# HALO Series CC6068 (Direct Light)



## FEATURES

1. Patent Design Connection System, NO Light Leak, Easy For Installation
2. High Luminous Flux, reach 100lm/W
3. UGR < 19, Microprismatic Diffuser, Light Output Soft, Health for Eye
4. Support 0-10V, Triac, DALI and Casambi Dimming
5. Support Customize Curved Linear Shapes For Different Projects
6. Precise Bend Tech, the diameter tolerance  $\pm 1.0\text{mm}$
7. Support Customized RAL/Pantone Finish Color


UGR < 19




Code	Power	Input Voltage	CRI	CCT	System Output	Finish
CC6068-600mm	38W	100-240V	80	3000K	3572lm	Black/White/Customized
				4000K	3610lm	Black/White/Customized
				6000K	3648lm	Black/White/Customized
CC6068-900mm	55W	100-240V	80	3000K	5170lm	Black/White/Customized
				4000K	5225lm	Black/White/Customized
				6000K	5280lm	Black/White/Customized
CC6068-1200mm	75W	100-240V	80	3000K	7050lm	Black/White/Customized
				4000K	7125lm	Black/White/Customized
				6000K	7200lm	Black/White/Customized
CC6068-1500mm	94W	100-240V	80	3000K	8836lm	Black/White/Customized
				4000K	8930lm	Black/White/Customized
				6000K	9024lm	Black/White/Customized
CC6068-1800mm	113W	100-240V	80	3000K	10622lm	Black/White/Customized
				4000K	10735lm	Black/White/Customized
				6000K	10848lm	Black/White/Customized
CC6068-2400mm	151W	100-240V	80	3000K	14194lm	Black/White/Customized
				4000K	14345lm	Black/White/Customized
				6000K	14496lm	Black/White/Customized




## Cross Section Size & Details



## Luminous Intensity Distribution Curve

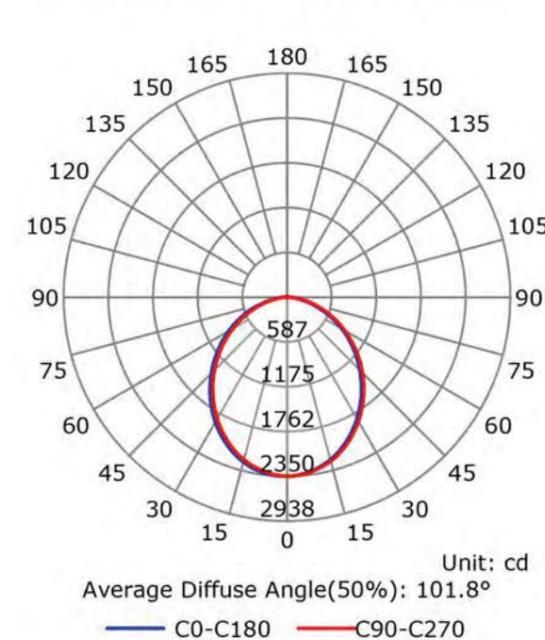


## The Average Illuminance Effective Figure

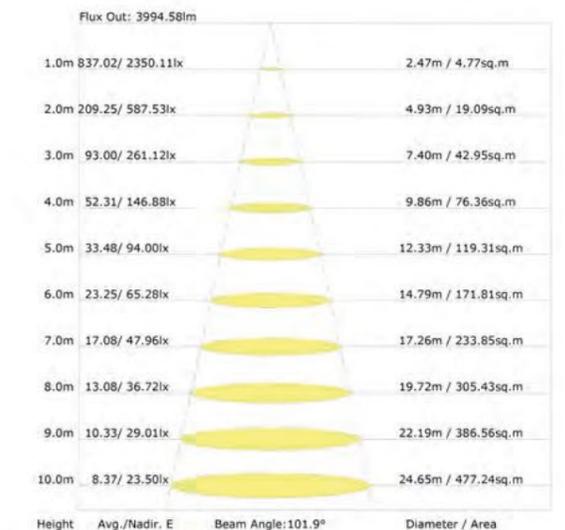

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Mx Shining Limited

# HALO Square Series CF6068 (Direct Light)

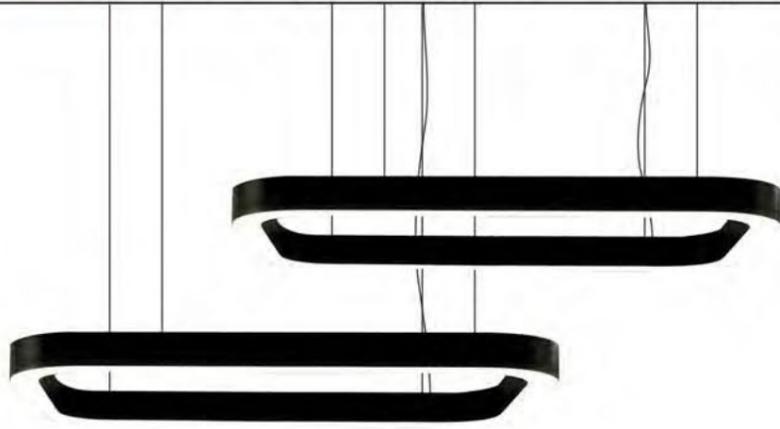

## FEATURES

1. Patent Design Connection System, NO Light Leak, Easy For Installation
2. High Luminous Flux, reach 100lm/W
3. UGR < 19, Microprismatic Diffuser, Light Output Soft, Health for Eye
4. Support 0-10V, Triac, DALI and Casambi Dimming
5. Support Customize Curved Linear Shapes For Different Projects
6. Precise Bend Tech, the diameter tolerance  $\pm 1.0\text{mm}$
7. Support Customized RAL/Pantone Finish Color


UGR < 19




Code	Power	Input Voltage	CRI	CCT	System Output	Finish
CF6068-600*600mm	38W	100-240V	80	3000K	4512lm	Black/White/Customized
				4000K	4560lm	Black/White/Customized
				6000K	4608lm	Black/White/Customized
CF6068-600*1000mm	55W	100-240V	80	3000K	6016lm	Black/White/Customized
				4000K	6080lm	Black/White/Customized
				6000K	6144lm	Black/White/Customized
CF6068-1000*1000mm	75W	100-240V	80	3000K	7520lm	Black/White/Customized
				4000K	7600lm	Black/White/Customized
				6000K	7680lm	Black/White/Customized
CF6068-600*1200mm	94W	100-240V	80	3000K	6768lm	Black/White/Customized
				4000K	6840lm	Black/White/Customized
				6000K	6912lm	Black/White/Customized
CF6068-1200*1200mm	113W	100-240V	80	3000K	9024lm	Black/White/Customized
				4000K	9120lm	Black/White/Customized
				6000K	9216lm	Black/White/Customized
CF6068-1200*2400mm	151W	100-240V	80	3000K	13536lm	Black/White/Customized
				4000K	13680lm	Black/White/Customized
				6000K	13824lm	Black/White/Customized



Luminous Intensity Distribution Curve

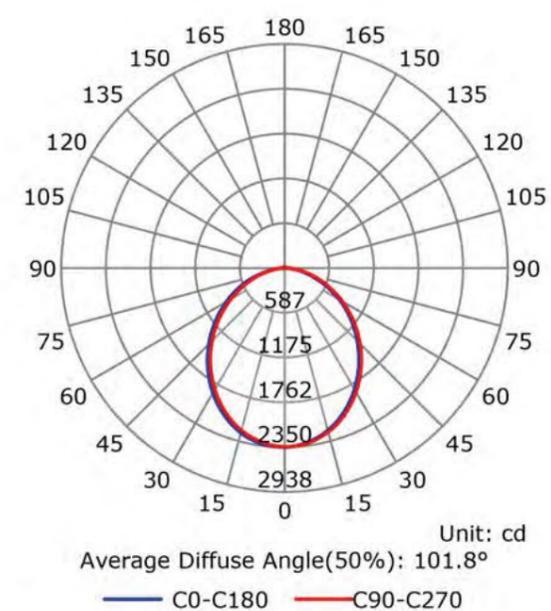


The Average Illuminance Effective Figure

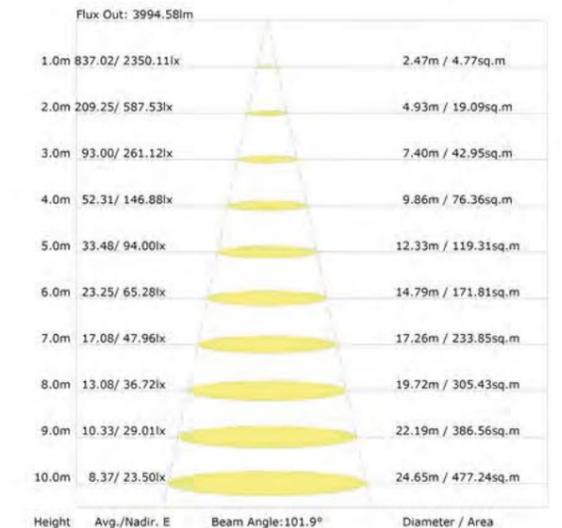

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

# HALO Square Series CE6068 (Direct Light)

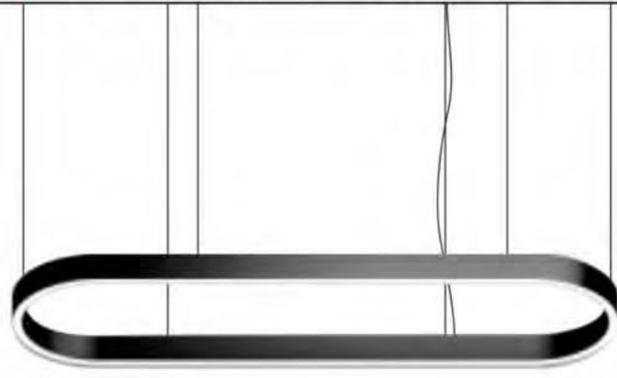

## FEATURES

1. Patent Design Connection System, NO Light Leak, Easy For Installation
2. High Luminous Flux, reach 100lm/W
3. UGR < 19, Microprismatic Diffuser, Light Output Soft, Health for Eye
4. Support 0-10V, Triac, DALI and Casambi Dimming
5. Support Customize Curved Linear Shapes For Different Projects
6. Precise Bend Tech, the diameter tolerance  $\pm 1.0\text{mm}$
7. Support Customized RAL/Pantone Finish Color


**UGR < 19**




Code	Power	Input Voltage	CRI	CCT	System Output	Finish
CE6068-1200*600mm	60W	100-240V	80	3000K	5640lm	Black/White/Customized
				4000K	5700lm	Black/White/Customized
				6000K	5760lm	Black/White/Customized
CE6068-1800*600mm	86W	100-240V	80	3000K	8084lm	Black/White/Customized
				4000K	8170lm	Black/White/Customized
				6000K	8256lm	Black/White/Customized
CE6068-2400*600mm	110W	100-240V	80	3000K	10340lm	Black/White/Customized
				4000K	10450lm	Black/White/Customized
				6000K	10560lm	Black/White/Customized
CE6068-2400*1200mm	124W	100-240V	80	3000K	11656lm	Black/White/Customized
				4000K	11780lm	Black/White/Customized
				6000K	11904lm	Black/White/Customized
CE6068-3600*1200mm	172W	100-240V	80	3000K	16168lm	Black/White/Customized
				4000K	16340lm	Black/White/Customized
				6000K	16512lm	Black/White/Customized
CE6068-4800*1200mm	220W	100-240V	80	3000K	20680lm	Black/White/Customized
				4000K	20900lm	Black/White/Customized
				6000K	21120lm	Black/White/Customized




## Cross Section Size & Details



## Luminous Intensity Distribution Curve

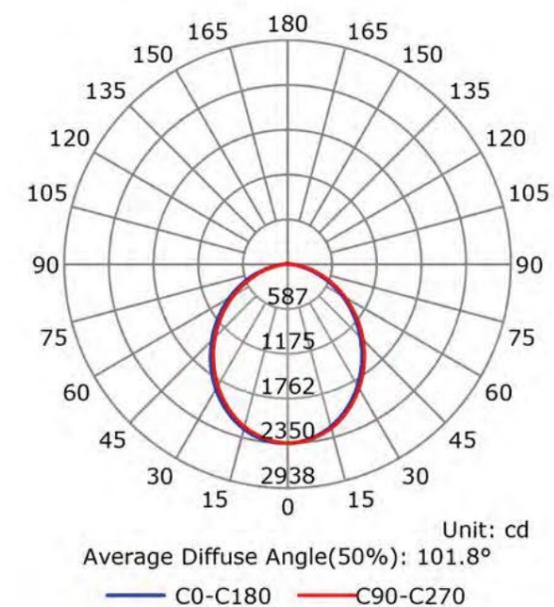


## The Average Illuminance Effective Figure

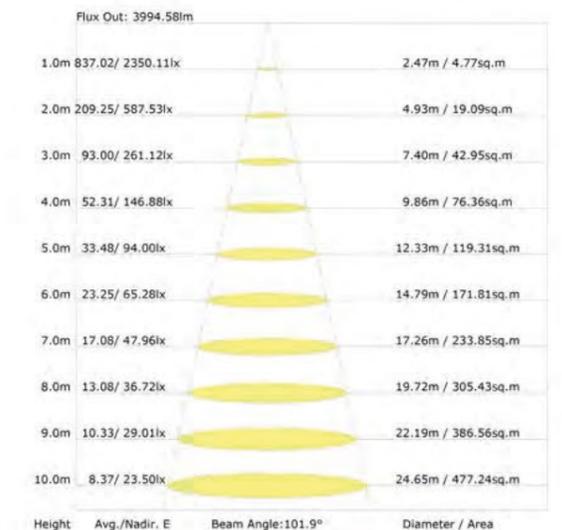

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

# HALO Rectangle Series CX6068 (Direct Light)

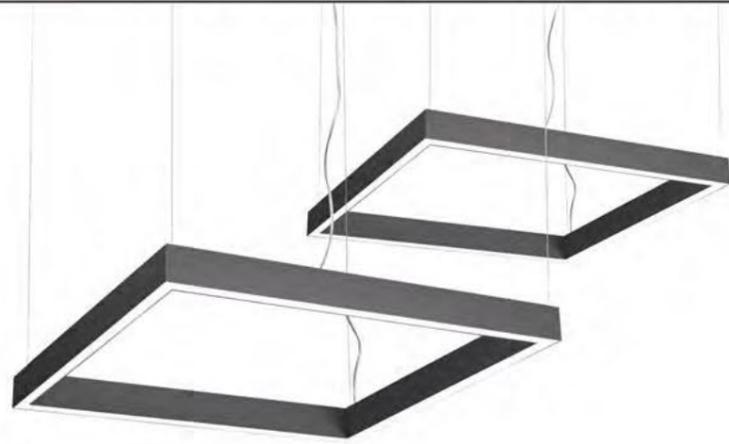

## FEATURES

1. Patent Design Connection System, NO Light Leak, Easy For Installation
2. High Luminous Flux, reach 100lm/W
3. UGR < 19, Microprismatic Diffuser, Light Output Soft, Health for Eye
4. Support 0-10V, Triac, DALI and Casambi Dimming
5. Support Customize Curved Linear Shapes For Different Projects
6. Precise Bend Tech, the diameter tolerance  $\pm 1.0\text{mm}$
7. Support Customized RAL/Pantone Finish Color


UGR < 19




Code	Power	Input Voltage	CRI	CCT	System Output	Finish
CX6068-450*450mm	32W	100-240V	80	3000K	3008lm	Black/White/Customized
				4000K	3040lm	Black/White/Customized
				6000K	3072lm	Black/White/Customized
CX6068-600*600mm	48W	100-240V	80	3000K	4512lm	Black/White/Customized
				4000K	4560lm	Black/White/Customized
				6000K	4608lm	Black/White/Customized
CX6068-900*900mm	72W	100-240V	80	3000K	6768lm	Black/White/Customized
				4000K	6840lm	Black/White/Customized
				6000K	6912lm	Black/White/Customized
CX6068-1200*1200mm	96W	100-240V	80	3000K	9024lm	Black/White/Customized
				4000K	9120lm	Black/White/Customized
				6000K	9216lm	Black/White/Customized
CX6068-450*900mm	54W	100-240V	80	3000K	5076lm	Black/White/Customized
				4000K	5130lm	Black/White/Customized
				6000K	5184lm	Black/White/Customized
CX6068-450*1200mm	66W	100-240V	80	3000K	6204lm	Black/White/Customized
				4000K	6270lm	Black/White/Customized
				6000K	6336lm	Black/White/Customized



Luminous Intensity Distribution Curve

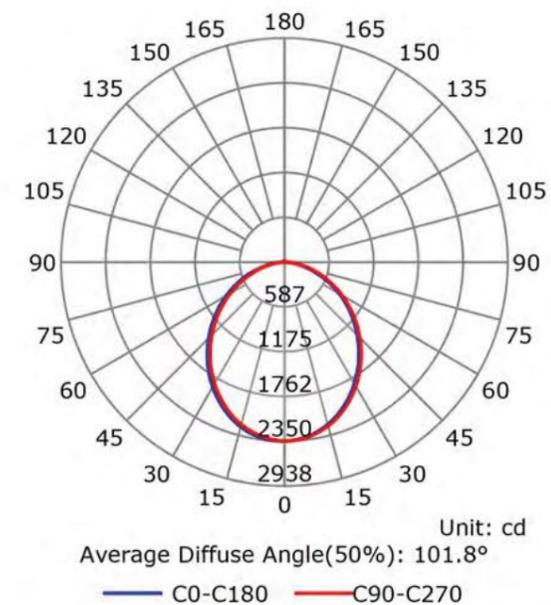


The Average Illuminance Effective Figure

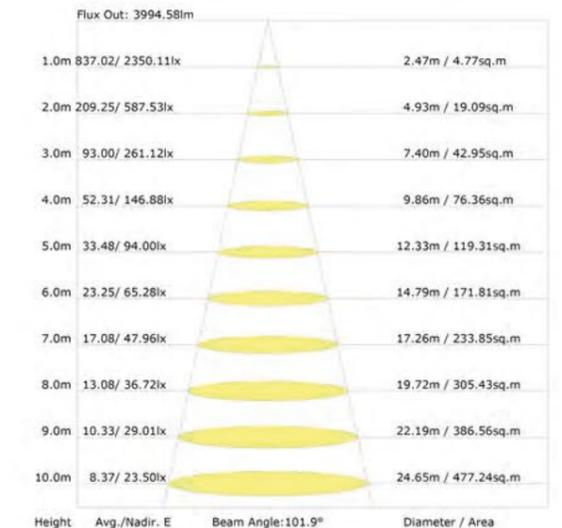

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

# HALO Hexagon Series CH6068 (Direct Light)

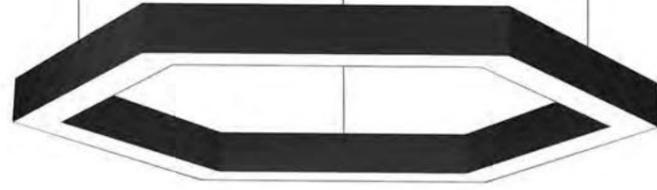

## FEATURES

1. Patent Design Connection System, NO Light Leak, Easy For Installation
2. High Luminous Flux, reach 100lm/W
3. UGR < 19, Microprismatic Diffuser, Light Output Soft, Health for Eye
4. Support 0-10V, Triac, DALI and Casambi Dimming
5. Support Customize Curved Linear Shapes For Different Projects
6. Precise Bend Tech, the diameter tolerance  $\pm 1.0\text{mm}$
7. Support Customized RAL/Pantone Finish Color


UGR < 19




Code	Power	Input Voltage	CRI	CCT	System Output	Finish
CH6068-286mm	34W	100-240V	80	3000K	3196lm	Black/White/Customized
				4000K	3230lm	Black/White/Customized
				6000K	3264lm	Black/White/Customized
CH6068-386mm	46W	100-240V	80	3000K	4324lm	Black/White/Customized
				4000K	4370lm	Black/White/Customized
				6000K	4416lm	Black/White/Customized
CH6068-486mm	58W	100-240V	80	3000K	5452lm	Black/White/Customized
				4000K	5510lm	Black/White/Customized
				6000K	5568lm	Black/White/Customized
CH6068-586mm	70W	100-240V	80	3000K	6580lm	Black/White/Customized
				4000K	6650lm	Black/White/Customized
				6000K	6720lm	Black/White/Customized
CH6068-686mm	82W	100-240V	80	3000K	7708lm	Black/White/Customized
				4000K	7790lm	Black/White/Customized
				6000K	7872lm	Black/White/Customized
CH6068-786mm	95W	100-240V	80	3000K	8930lm	Black/White/Customized
				4000K	9025lm	Black/White/Customized
				6000K	9120lm	Black/White/Customized



## Cross Section Size & Details



## Luminous Intensity Distribution Curve

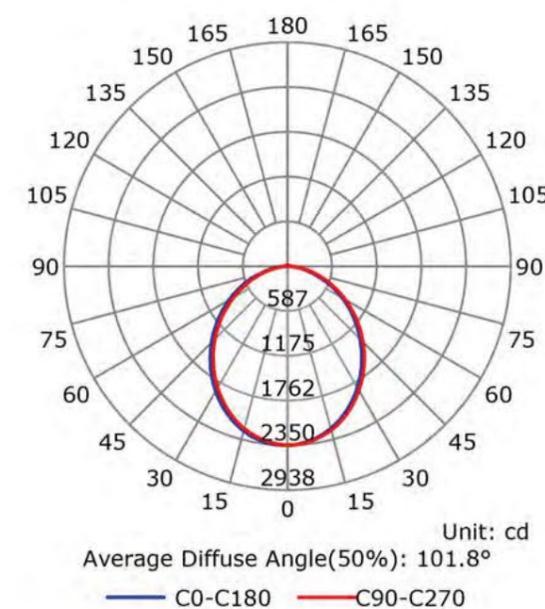

## The Average Illuminance Effective Figure




Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

# DASH Series LP4880 (Direct Light)



## FEATURES

1. Frosted PMMA Diffuser and Microprismatic PMMA Diffuser(UGR < 19) Optional
2. Constant Current DC36V output, Support 0-10V, Triac, DALI Dimming
3. 45°Connector System Design, Easy for installation
4. Endcap Screwless, Elegant Appearance
5. IES File and High-Resolution Photos Available
6. 5 Different Light Width For Your Choice
7. Support Customized RAL/ Pantone Finish Color




**UGR < 19**




Code	Power	Input Voltage	CRI	CCT	System Output	Finish
LP4880-570mm	12W	100-240V	80	3000K	1224lm	Black/White/Customized
				4000K	1260lm	Black/White/Customized
				6000K	1284lm	Black/White/Customized
LP4880-850mm	18W	100-240V	80	3000K	1836lm	Black/White/Customized
				4000K	1890lm	Black/White/Customized
				6000K	1926lm	Black/White/Customized
LP4880-1200mm	24W	100-240V	80	3000K	2448lm	Black/White/Customized
				4000K	2520lm	Black/White/Customized
				6000K	2568lm	Black/White/Customized
LP4880-1550mm	32W	100-240V	80	3000K	3264lm	Black/White/Customized
				4000K	3360lm	Black/White/Customized
				6000K	3424lm	Black/White/Customized
LP4880-1760mm	36W	100-240V	80	3000K	3672lm	Black/White/Customized
				4000K	3780lm	Black/White/Customized
				6000K	3852lm	Black/White/Customized
LP4880-2390mm	48W	100-240V	80	3000K	4896lm	Black/White/Customized
				4000K	5040lm	Black/White/Customized
				6000K	5136lm	Black/White/Customized



Luminous Intensity Distribution Curve

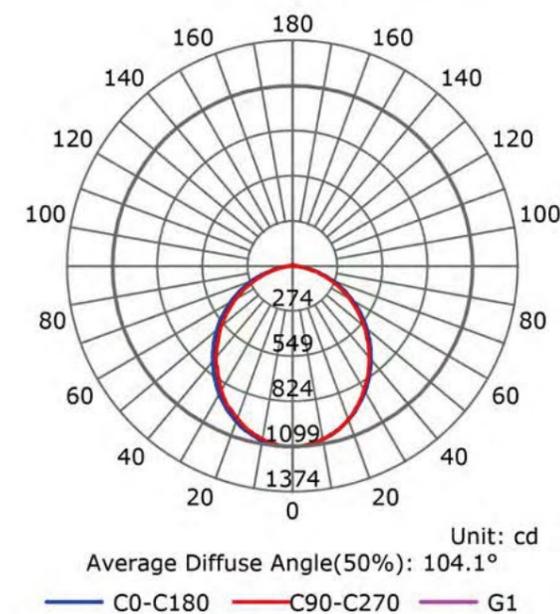

The Average Illuminance Effective Figure

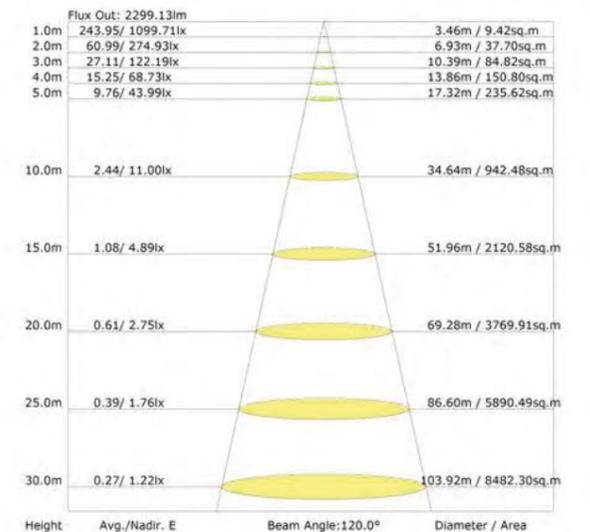



**M<sup>x</sup> Shining Limited**